

# Exercise 2

Osamah Barakat

Osamah.barakat@cs.uni-goettingen.de

# CRC checksums

Please calculate the CRC  $R$  of

$$D = 0101\ 1101\ 1010\ 0101\ 1110\ 0000.$$

Use the 4 bit generator

$$G = 1101.$$

*Note:*

*$R$  is always of length  $|G|-1$*

# CRC (Done by Vivien & Fabiola) trials by Linus, Jonathan and Helen

0101100110100101110000000000  
1101  
01101  
1101  
00001101  
1101  
00011011  
1101  
1101  
0

1100  
1101  
110  
R

1000  
1101  
1010  
1101  
1110  
1101  
110

# Purpose of the link layer

What is the purpose of the link layer?

# Purpose of the link layer

What is the purpose of the link layer?

Answer:

Hop-to-hop connection in one network  
(NOT between networks)

# ARP and inter-networking

What happens, if you want to connect to a host that is not in your local area network?

# ARP and inter-networking


What happens, if you want to connect to a host that is not in your local area network?

Answer:

Remember: ARP is layer 2, routers are layer 3.  
Inter-networking is the job of the network layer.

ARP is serving in looking up the MAC of the router that connects to the network of the destination node.

- 1.A creates IP datagram with source A, destination B
- 2.A uses ARP to get R's MAC address for 111.111.111.110
- 3.A creates link-layer frame with R's MAC address as dest, frame contains A-to-B IP datagram
- 4.A's NIC sends frame
- 5.R's NIC receives frame
- 6.R removes IP datagram from Ethernet frame, sees destination B
- 7.R uses ARP to get B's MAC address
- 8.R creates frame containing A-to-B IP datagram sends to B

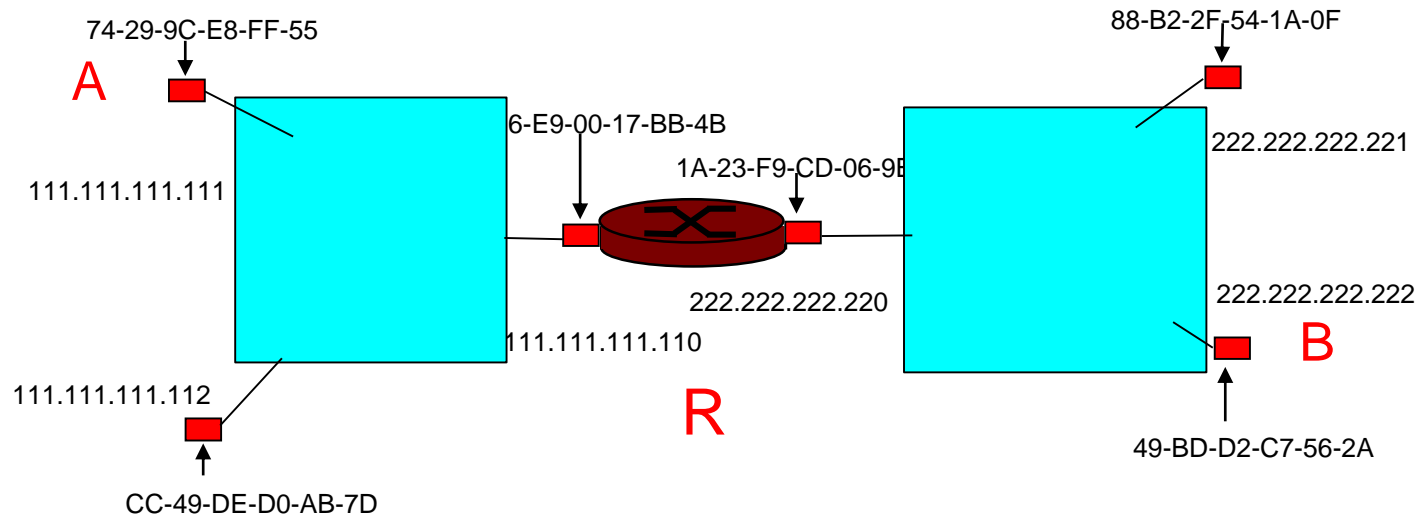



# MAC and IP addresses

Please name a conceptual difference between MAC and IP addresses

# MAC and IP addresses

Please name a conceptual difference between MAC and IP addresses

Answer:

MAC addresses are unique identifiers for a specific device.

IP addresses for devices may change frequently

# Exponential backoff

Why does Ethernet use exponential backoff for collision detection?

# Exponential backoff

Why does Ethernet use exponential backoff for collision detection?

Answer:

Exponential backoff is a simple way to quickly resolve a collision and to adapt to varying congestion states.

It does not require additional signalling among nodes.