
Network Layer – Part III Multicast and Mobility

Computer Networks, Winter 2014/2015






Network Layer III

- 4.6 Multicast
 - Broadcast routing
 - Multicast routing
 - Multicast routing protocols
- 4.7 Mobility
 - What is Mobility?
 - Network layer mobility concepts and principles
 - Mobile IP



Broadcast Routing

- Deliver packets from source to all other nodes
- Source duplication is inefficient:

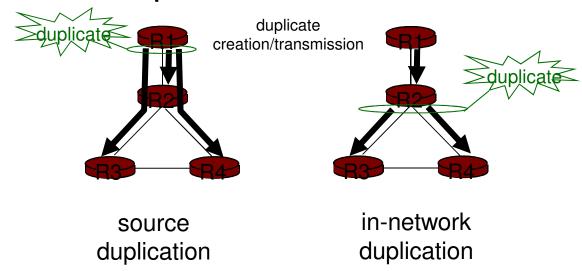

 Source duplication: how does source determine recipient addresses?




In-network duplication

- Flooding: when node receives broadcast packets, sends copy to all neighbors
 - Problems: cycles & broadcast storm
- Controlled flooding: node only broadcast pkt if it hasn't broadcasted same pkt before
 - Node keeps track of pkt ids already broadcasted
 - Reverse path forwarding (RPF): only forward pkt if it arrived on shortest path between node and source
- Spanning tree
 - No redundant packets received by any node




Spanning Tree

- First construct a spanning tree
- Nodes forward copies only along spanning tree



(a) Broadcast initiated at A




(b) Broadcast initiated at D




Spanning Tree: Creation

- Center node
- Each node sends unicast join message to center node 'E'
 - Message forwarded until it arrives at a node already belonging to spanning tree



(a) Stepwise construction of spanning tree



(b) Constructed spanning tree




Network Layer II

- 4.6 Multicast
 - Broadcast routing
 - Multicast routing
 - Multicast routing protocols
- 4.7 Mobility
 - What is Mobility?
 - Network layer mobility concepts and principles
 - Mobile IP



Multicast Routing: Problem Statement

- Goal: find a tree (or trees) connecting routers that have local multicast group members
 - Tree: not all paths between routers used
 - Source-based: different tree from each sender to receiver
 - Shared-tree: same tree used by all group members

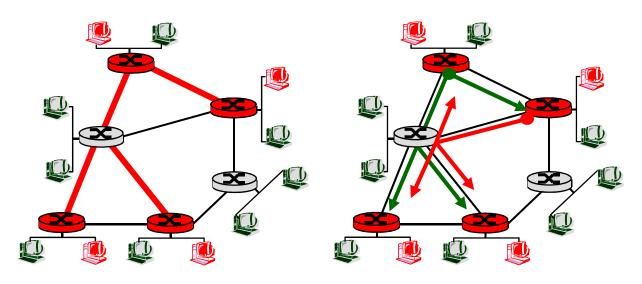



Shared tree

Source-based trees


Approaches for building mcast trees

- Source-based tree: one tree per source
 - shortest path trees
 - reverse path forwarding
- Group-shared tree: group uses one tree
 - minimal spanning (Steiner)
 - center-based trees



Shortest Path Tree

- Multicast forwarding tree: tree of shortest path routes from source to all receivers
 - Dijkstra's algorithm

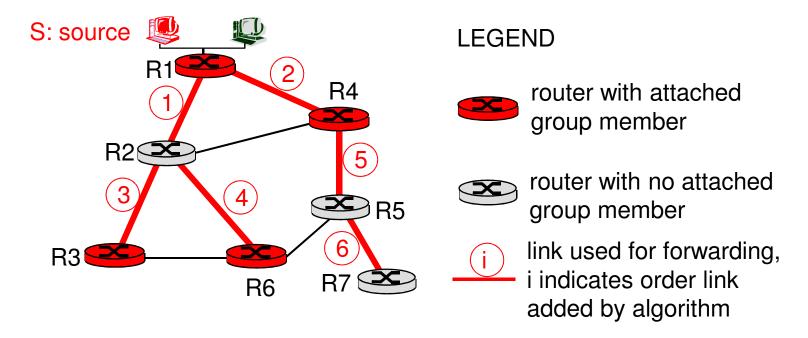




Reverse Path Forwarding

- Relies on router's knowledge of unicast shortest path from it to sender
- Each router has simple forwarding behavior:
 - if (multicast datagram received on incoming link on shortest path back to center) then flood datagram onto all outgoing links else ignore datagram



Reverse Path Forwarding: example

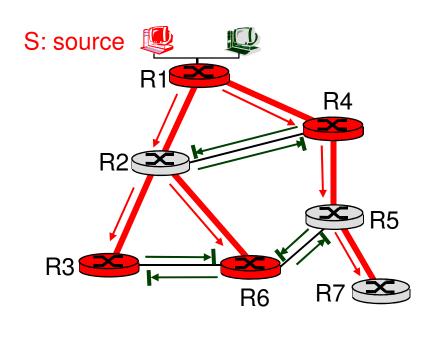


LEGEND

- router with attached group member
- router with no attached group member
- datagram will be forwarded
- → datagram will not be forwarded
- result is a source-specific reverse SPT
 - may be a bad choice with asymmetric links



Reverse Path Forwarding: pruning

- forwarding tree contains subtrees with no multicast group members
 - o no need to forward datagrams down subtree
 - "prune" msgs sent upstream by router with no downstream group members

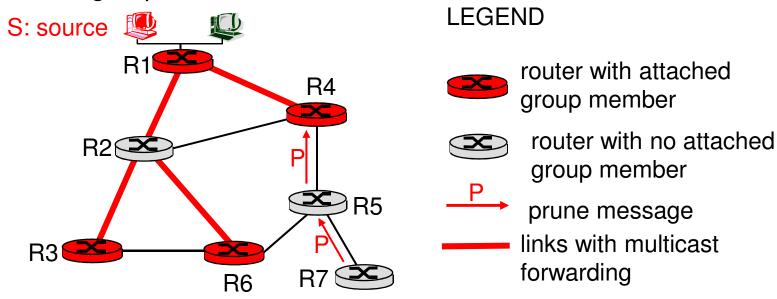




Center-based trees

- Single delivery tree shared by all
- One router identified as "center" of tree
- o To join:
 - edge router sends unicast join-msg addressed to center router
 - join-msg "processed" by intermediate routers and forwarded towards center
 - join-msg either hits existing tree branch for this center, or arrives at center
 - path taken by join-msg becomes new branch of tree for this router



Center-based trees: an example

Suppose R6 chosen as center:

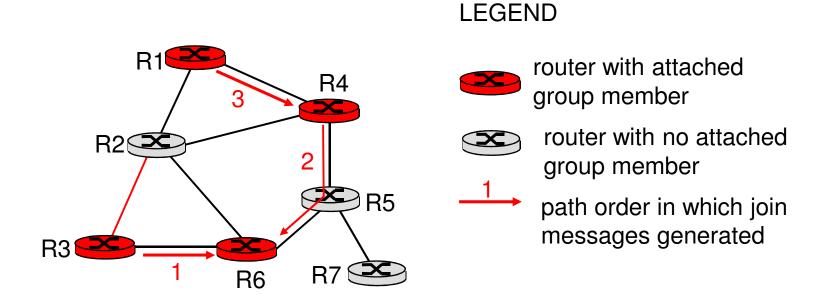




Network Layer II

- 4.6 Multicast
 - Broadcast routing
 - Multicast routing
 - Multicast routing protocols
- 4.7 Mobility
 - What is Mobility?
 - Network layer mobility concepts and principles
 - Mobile IP



Internet Multicast Service Model

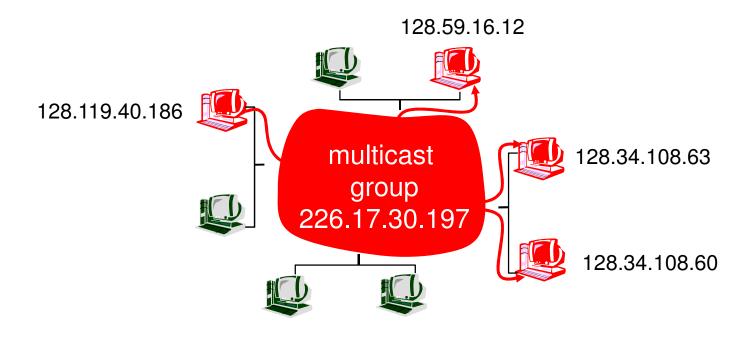


Multicast group concept: use of indirection

- hosts addresses IP datagram to multicast group
- routers forward multicast datagrams to hosts that have "joined" that multicast group



Multicast Groups

Class D Internet addresses reserved for multicast:




- Host group semantics:
 - anyone can "join" (receive pkts) multicast group
 - anyone can send pkts to multicast group
 - no network-layer identification to hosts of the members
- Needed: infrastructure to deliver mcast-addressed datagrams to all hosts that have joined that multicast group



Joining a mcast group: twostep process


- Local: host informs local meast router of a desire to join group:
 - IGMP (Internet Group Management Protocol)
- Wide area: local router interacts with other routers to receive mcast datagram flow
 - many protocols (e.g., DVMRP, MOSPF, PIM)

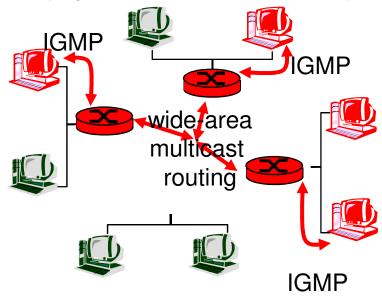



IGMP: Internet Group Management Protocol

- Host: sends IGMP report when application joins mcast group
 - IP_ADD_MEMBERSHIP socket option
 - host needs not explicitly "disjoin" group when leaving
- Router: sends IGMP query at regular intervals
 - host belonging to a meast group must reply to query

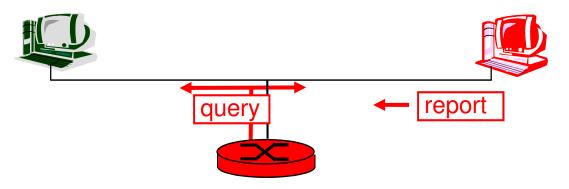



Internet Multicasting Routing: DVMRP

- DVMRP: distance vector multicast routing protocol, RFC1075
- flood and prune: reverse path forwarding, source-based tree
 - RPF tree based on DVMRP's own routing tables constructed by communicating DVMRP routers
 - no assumptions about underlying unicast
 - initial datagram to mcast group flooded everywhere via RPF
 - routers not wanting group: send upstream prune msgs




DVMRP: continued...

- soft state: DVMRP router periodically (1 min.)
 "forgets" branches are pruned:
 - mcast data again flows down unpruned branch
 - downstream router: reprune or else continue to receive data
- routers can quickly regraft to tree
 - following IGMP join at leaf
- odds and ends
 - commonly implemented in commercial routers
 - Mbone routing done using DVMRP



Tunneling

 Q: How to connect "islands" of multicast routers in a "sea" of unicast routers?

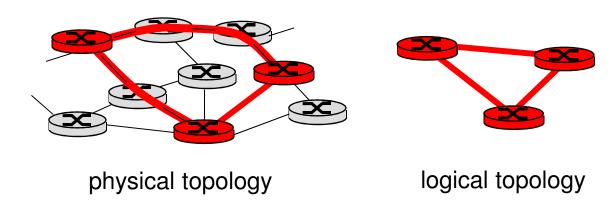

- mcast datagram encapsulated inside "normal" (non-multicastaddressed) datagram
- normal IP datagram sent through "tunnel" via regular IP unicast to receiving mcast router
- receiving mcast router de-capsulates pkt to get mcast datagram



PIM: Protocol Independent Multicast

- not dependent on any specific underlying unicast routing algorithm (works with all)
- two different multicast distribution scenarios :
 - o Dense:
 - group members densely packed, in "close" proximity.
 - bandwidth more plentiful
 - Sparse:
 - # networks with group members small wrt # interconnected networks
 - group members "widely dispersed"
 - bandwidth not plentiful



Consequences of Sparse-Dense Dichotomy

Dense

- group membership
 by routers assumed
 until routers explicitly
 prune
- data-driven
 construction on
 mcast tree (e.g.,
 RPF)
- bandwidth and nongroup-router processing profligate

Sparse

- no membership until routers explicitly join
- receiver- driven construction of mcast tree (e.g., centerbased)
- bandwidth and nongroup-router processing conservative




PIM- Dense Mode

- Flood-and-prune RPF, similar to DVMRP but
 - underlying unicast protocol provides RPF info for incoming datagram
 - less complicated (less efficient) downstream flood than DVMRP reduces reliance on underlying routing algorithm
 - has protocol mechanism for router to detect it is a leaf-node router



PIM - Sparse Mode

- center-based approach
- router sends join msg to rendezvous point (RP)
 - intermediate routers update state and forward join
- after joining via RP, router can switch to source-specific tree
 - increased performance: less concentration, shorter paths

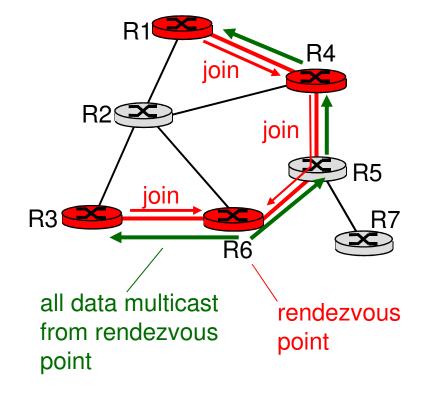




PIM - Sparse Mode

sender(s):

- unicast data to RP,
 which distributes down
 RP-rooted tree
- RP can extend mcast tree upstream to source
- RP can send stop msg
 if no attached receivers
 - "no one is listening!"

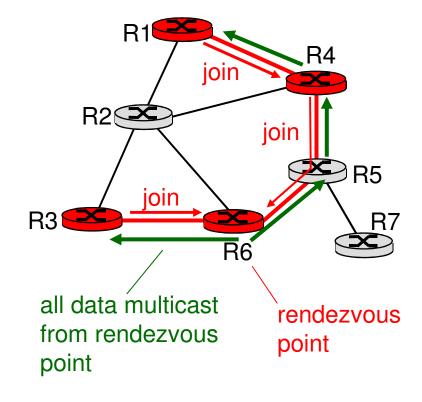




Network Layer II

- 4.6 Multicast
 - Broadcast routing
 - Multicast routing
 - Multicast routing protocols
- 4.7 Mobility
 - o What is Mobility?
 - Network layer mobility concepts and principles
 - Mobile IP



What is mobility?

spectrum of mobility, from the *network* perspective:

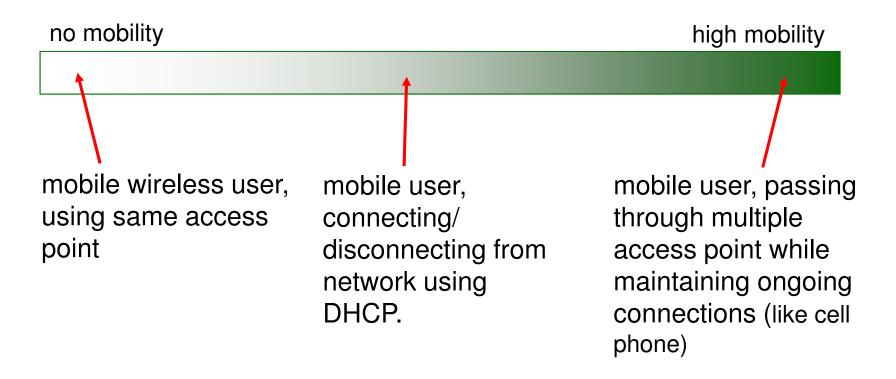




Mobility: Vocabulary

home network: permanent

"home" of mobile (e.g., 128.119.40/24)



wide area

remote

home agent: entity that will

perform mobility functions on

behalf of mobile, when mobile is




Permanent address:

address in home network, can always be used to reach mobile e.g., 128.119.40.186





Mobility: more vocabulary

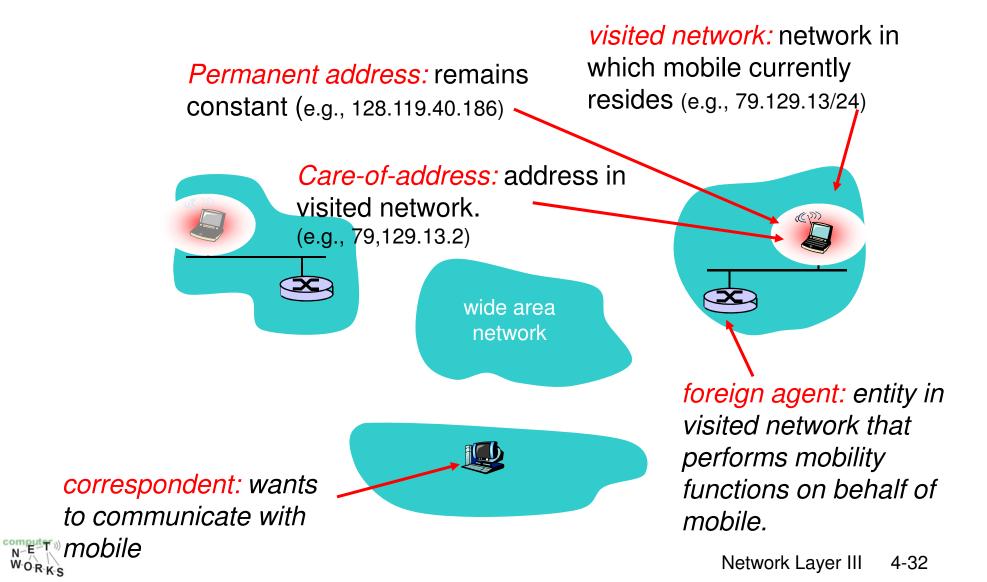

How do you contact a mobile friend:

Consider friend frequently changing addresses, how do you find her?

search all phone books?

- o call her parents?
- expect her to let you know where he/she is?

I wonder where Alice moved to?





Network Layer II

- 4.6 Multicast
 - Broadcast routing
 - Multicast routing
 - Multicast routing protocols
- 4.7 Mobility
 - What is Mobility?
 - Network layer mobility concepts and principles
 - Mobile IP



Mobility: approaches

- Let routing handle it
 - routers advertise permanent address of mobilenodes via usual routing table exchange.
 - routing tables indicate where each mobile located
 - no changes to end-systems
 - o does not scale well!




Mobility: approaches

- Let end-systems handle it
 - Indirect routing: communication from correspondent to mobile goes through home agent, then forwarded to remote
 - Direct routing: correspondent gets foreign address of mobile, sends directly to mobile



Mobility: registration

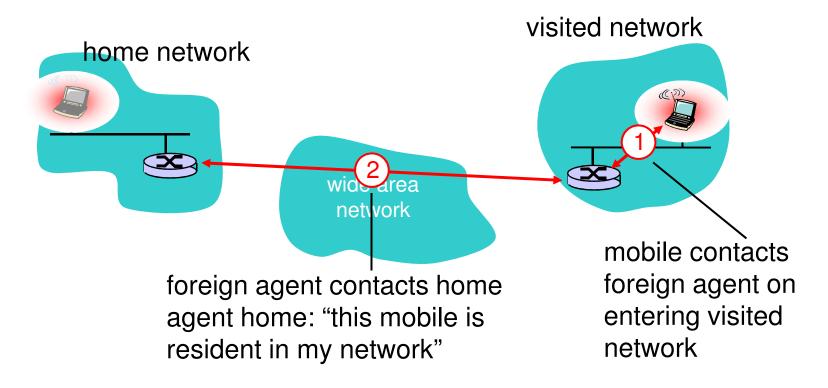


End result:

- Foreign agent knows about mobile
- Home agent knows location of mobile




Mobility via Indirect Routing

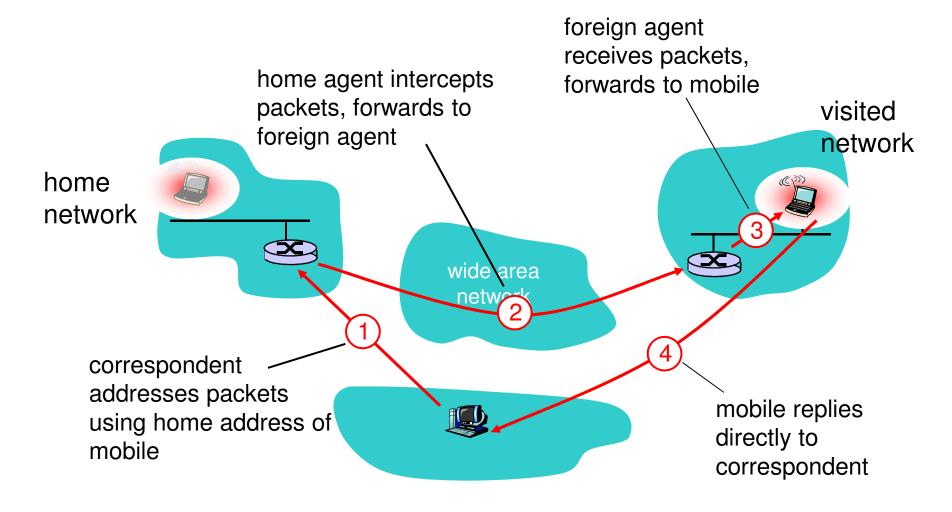



Indirect Routing: comments

- Mobile uses two addresses:
 - permanent address: used by correspondent (hence mobile location is *transparent* to correspondent)
 - care-of-address: used by home agent to forward datagrams to mobile
- foreign agent functions may be done by mobile itself
- triangle routing: correspondent-home-network-mobile
 - inefficient when
 correspondent, mobile
 are in same network

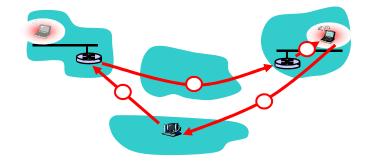




Indirect Routing: moving between networks

- suppose mobile user moves to another network
 - registers with new foreign agent
 - new foreign agent registers with home agent
 - home agent update care-of-address for mobile
 - packets continue to be forwarded to mobile (but with new care-of-address)
- mobility, changing foreign networks transparent: ongoing connections can be maintained!




Mobility via Direct Routing

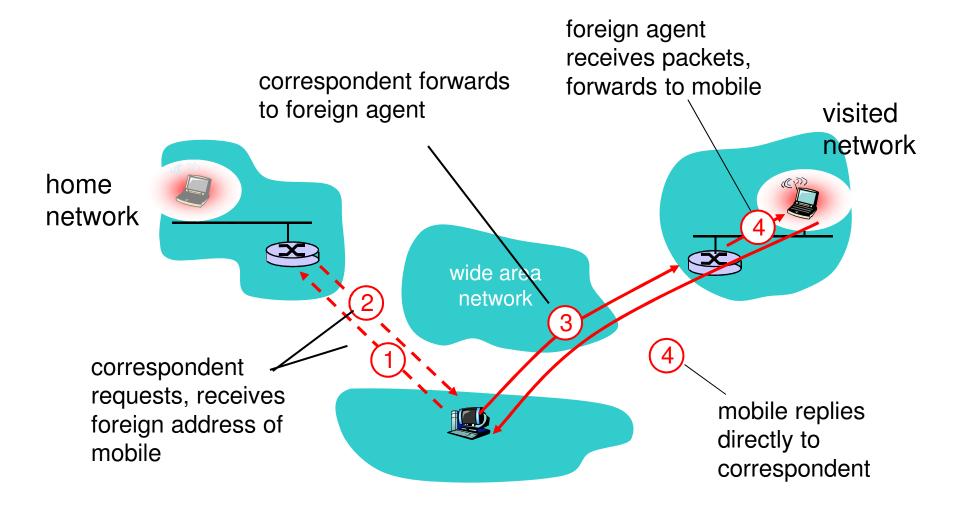



Mobility via Direct Routing: comments


- overcome triangle routing problem
- non-transparent to correspondent: correspondent must get care-of-address from home agent
 - o what if mobile changes visited network?

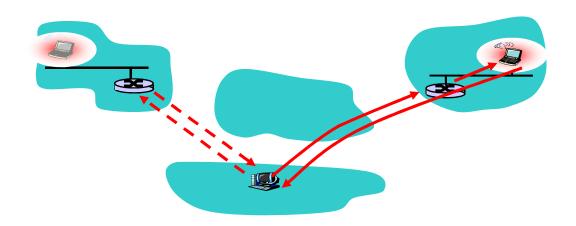



Accommodating mobility with direct routing

- o anchor foreign agent: FA in first visited network
- data always routed first to anchor FA
- when mobile moves: new FA arranges to have data forwarded from old FA (chaining)

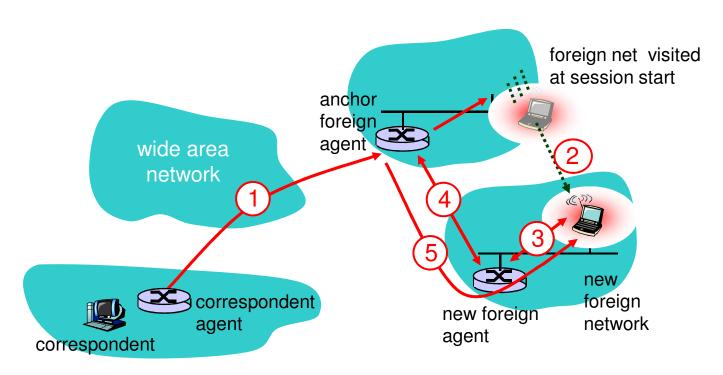



Network Layer II

- 4.6 Multicast
 - Broadcast routing
 - Multicast routing
 - Multicast routing protocols
- 4.7 Mobility
 - What is Mobility?
 - Network layer mobility concepts and principles
 - Mobile IP




Mobile IP

- o RFC 3344
- o has many features we've seen:
 - home agents, foreign agents, foreign-agent registration, care-of-addresses, encapsulation (packet-within-a-packet)
- three components to standard:
 - indirect routing of datagrams
 - agent discovery
 - registration with home agent



Mobile IP: indirect routing

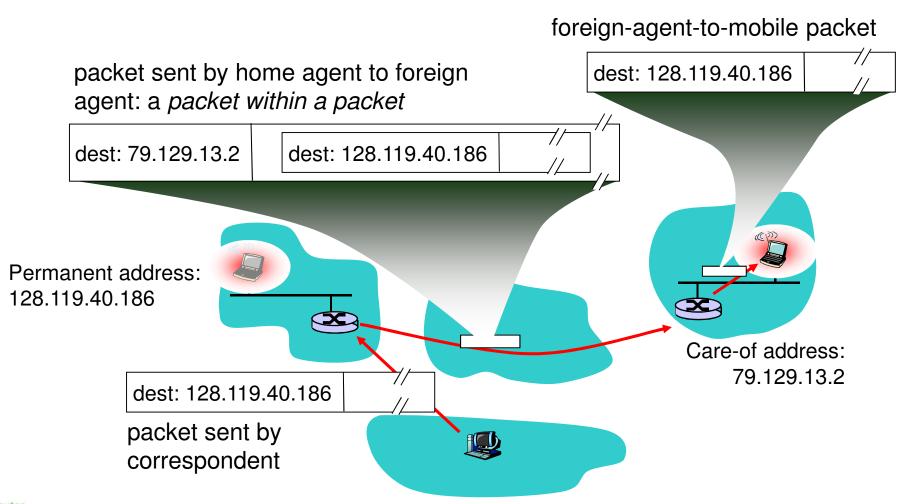




Mobile IP: agent discovery

 agent advertisement: foreign/home agents advertise service by broadcasting ICMP messages (typefield = 9)


H,F bits: home and/or foreign agent

R bit: registration required

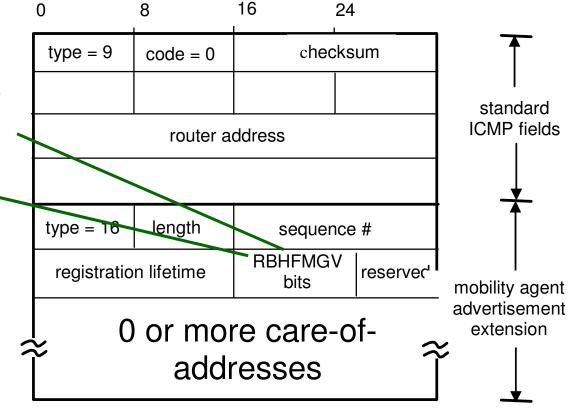



Mobile IP: registration example

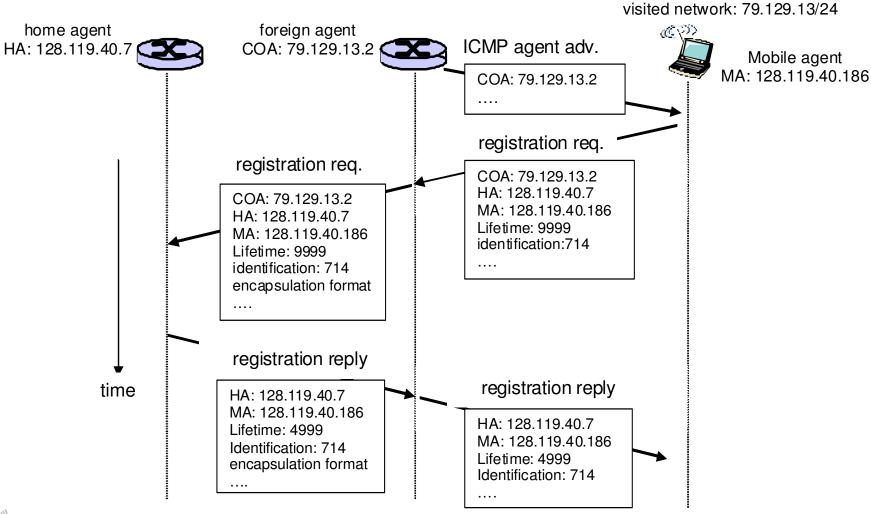



Thank you

Any questions?



Thank you

Any questions?

