


# Quality of Service

Computer Networks, Winter 2011/2012

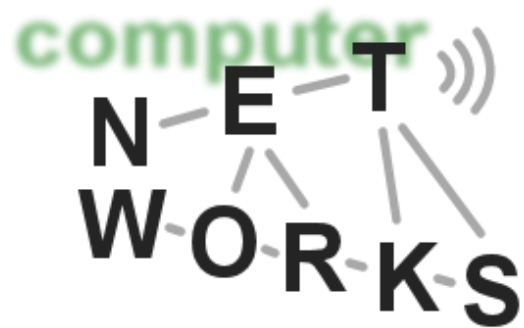


# Chapter 6 outline


- 6.1 Providing multiple classes of service
- 6.2 Differentiated Services
- 6.3 Providing QoS guarantees
- 6.4 Integrated Services
- 6.5 Resource Reservation Protocol
- 6.6 Next Steps in Signaling
- 6.7 Multiprotocol Label Switching

# Providing Multiple Classes of Service

- thus far: making the best of best effort service
  - one-size fits all service model
- alternative: multiple classes of service
  - partition traffic into classes
  - network treats different classes of traffic differently (analogy: VIP service vs regular service)
- granularity: differential service among multiple classes, not among individual connections

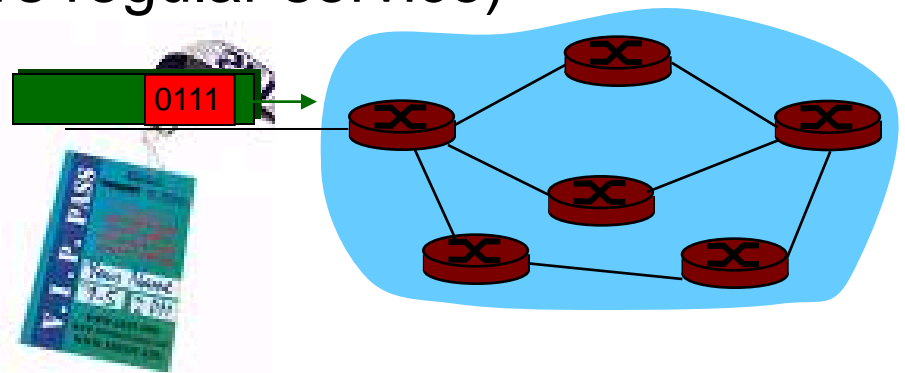


# Multiple classes of service: scenario

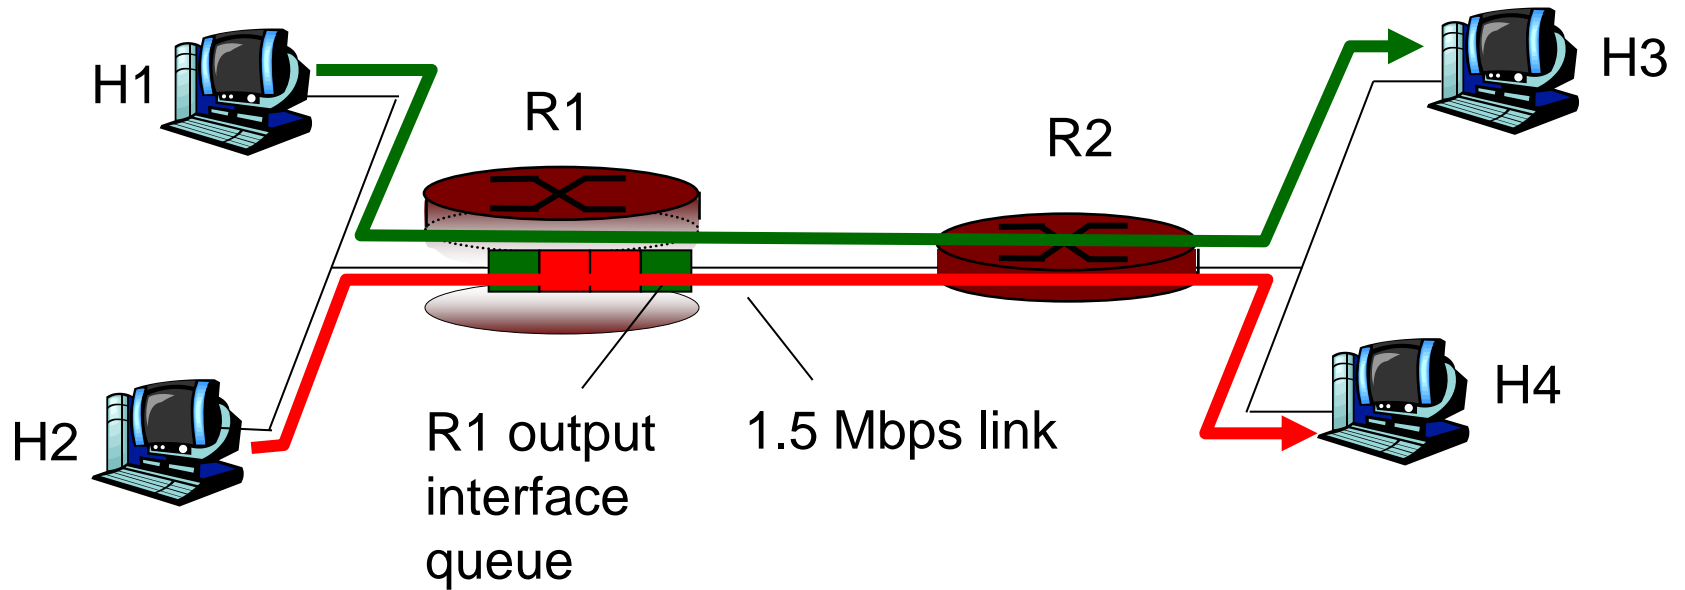

# Scenario 1: mixed FTP and audio

- Example: 1Mbps IP phone, FTP share 1.5 Mbps link.
  - bursts of FTP can congest router, cause audio loss
  - want to give priority to audio over FTP

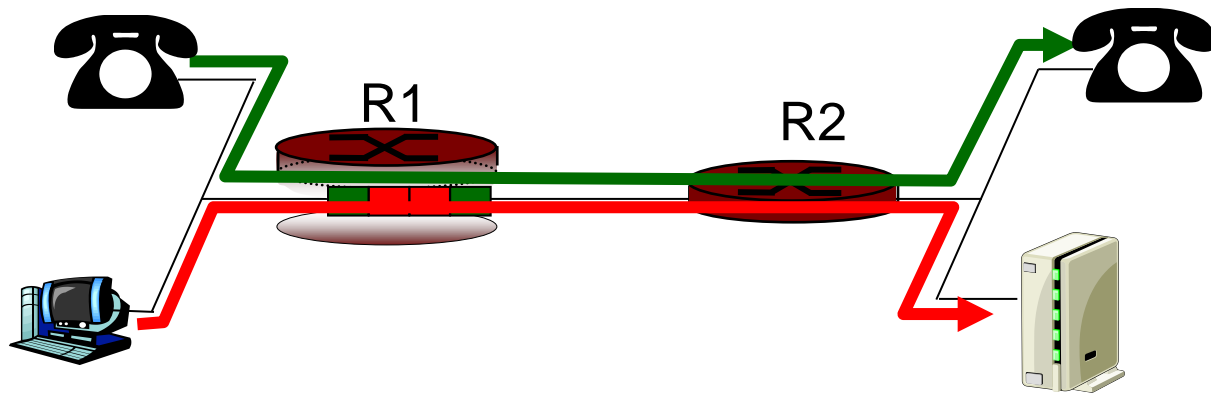


## Principle 1

packet marking needed for router to distinguish between different classes; and new router policy to treat packets accordingly

# Principles for QOS Guarantees (more)

- what if applications misbehave (audio sends higher than declared rate)
  - policing: force source adherence to bandwidth allocations
- marking and policing at network edge

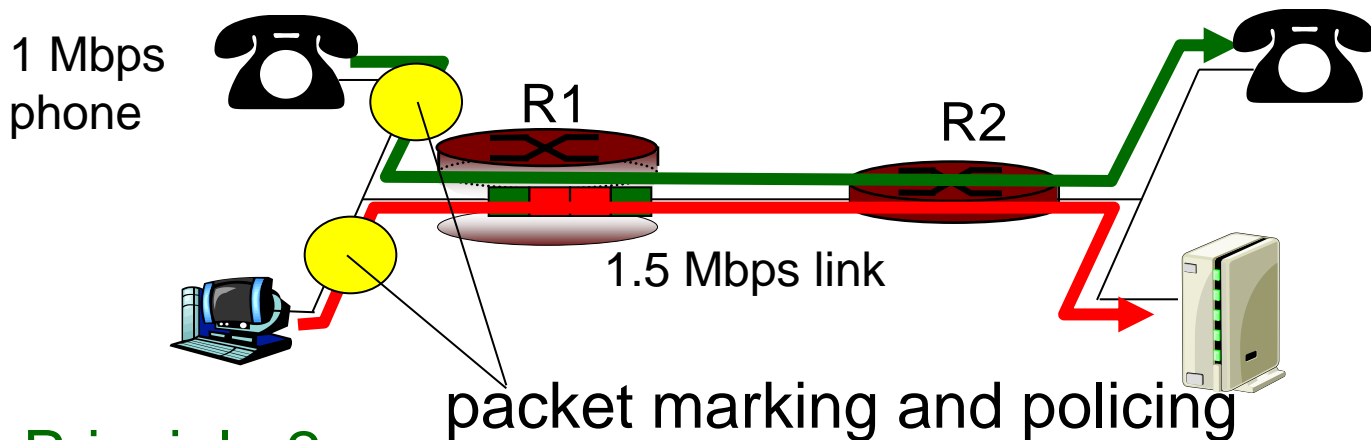


## Principle 2

provide protection (*isolation*) for one class from others

# Principles for QOS Guarantees (more)

- Allocating fixed (non-sharable) bandwidth to flow: inefficient use of bandwidth if flows doesn't use its allocation

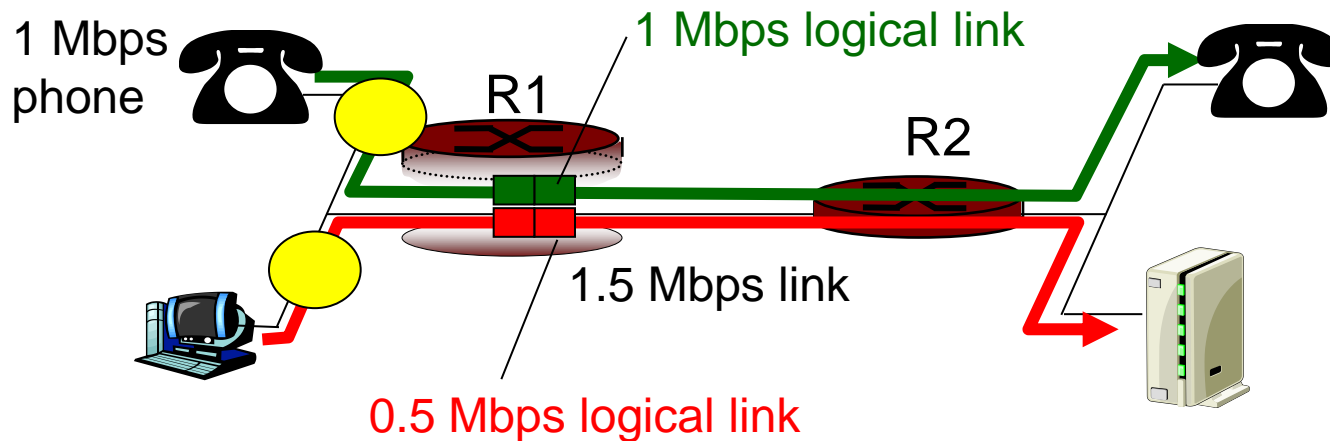


## Principle 3

While providing isolation, it is desirable to use resources as efficiently as possible

# Scheduling And Policing Mechanisms


- scheduling: choose next packet to send on link
- FIFO (first in first out) scheduling: send in order of arrival to queue
  - discard policy: if packet arrives to full queue: who to discard?
    - Tail drop: drop arriving packet
    - priority: drop/remove on priority basis
    - random: drop/remove randomly

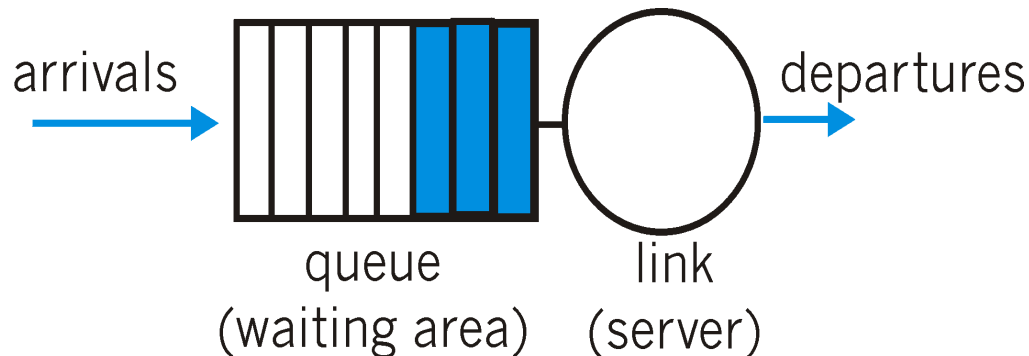




# Scheduling Policies: more

- Priority scheduling: transmit highest priority queued packet
- multiple classes, with different priorities
  - class may depend on marking or other header info, e.g. IP source/dest, port numbers, etc..

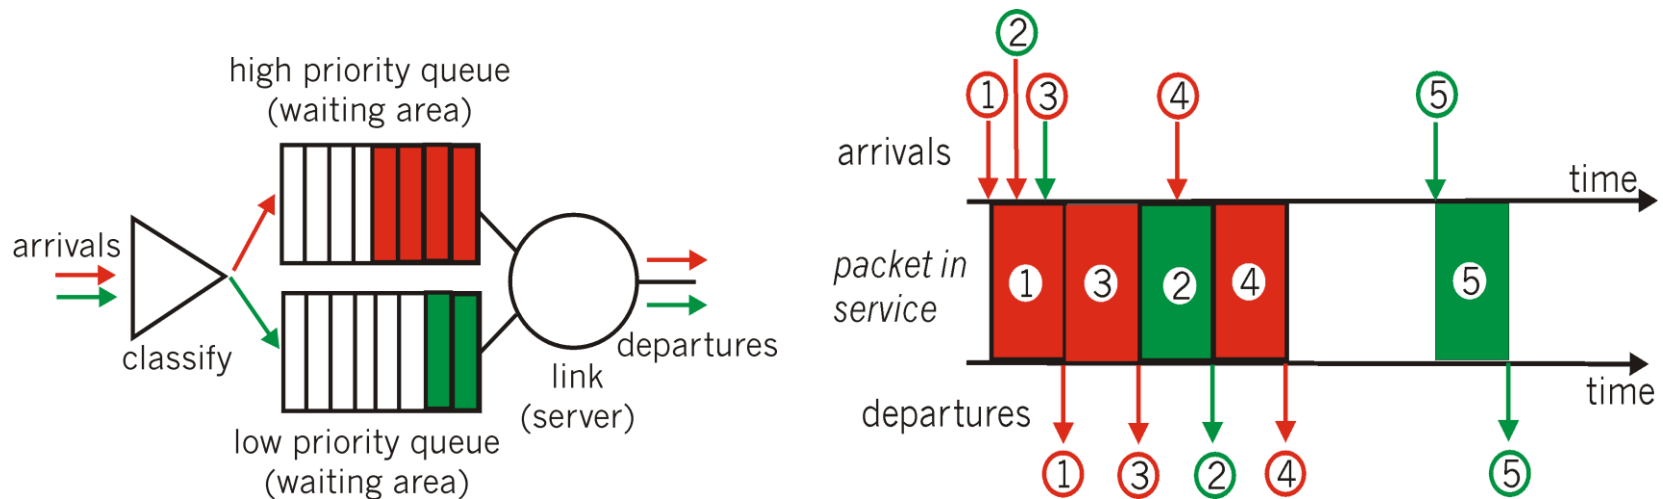


# Scheduling Policies: still more

- round robin scheduling:
- multiple classes
- cyclically scan class queues, serving one from each class (if available)

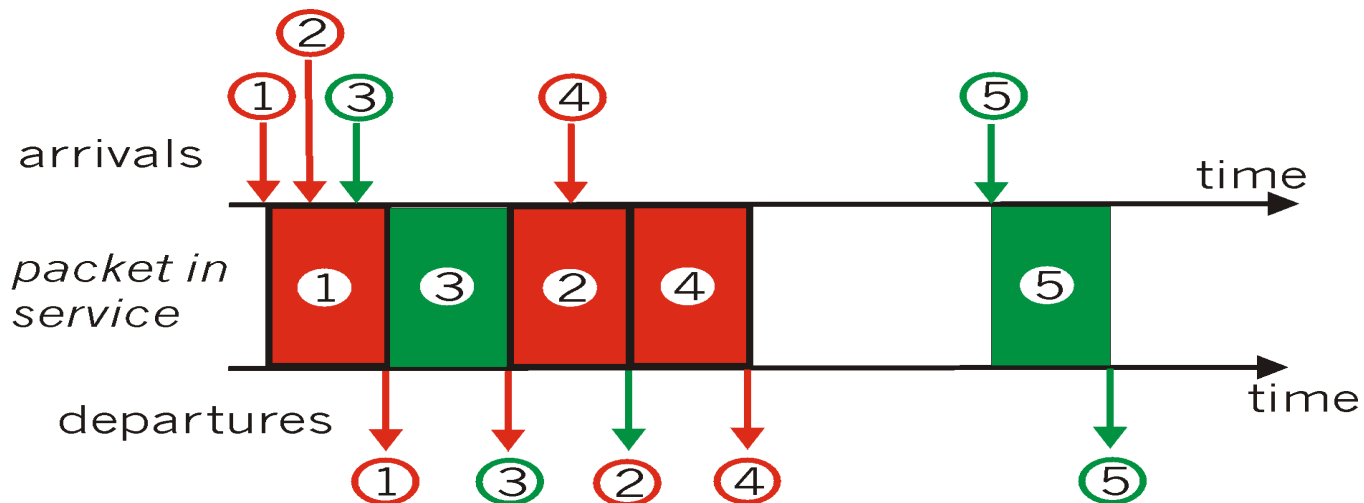

# Scheduling Policies: still more

- Weighted Fair Queuing:
  - generalized Round Robin
  - each class gets weighted amount of service in each cycle

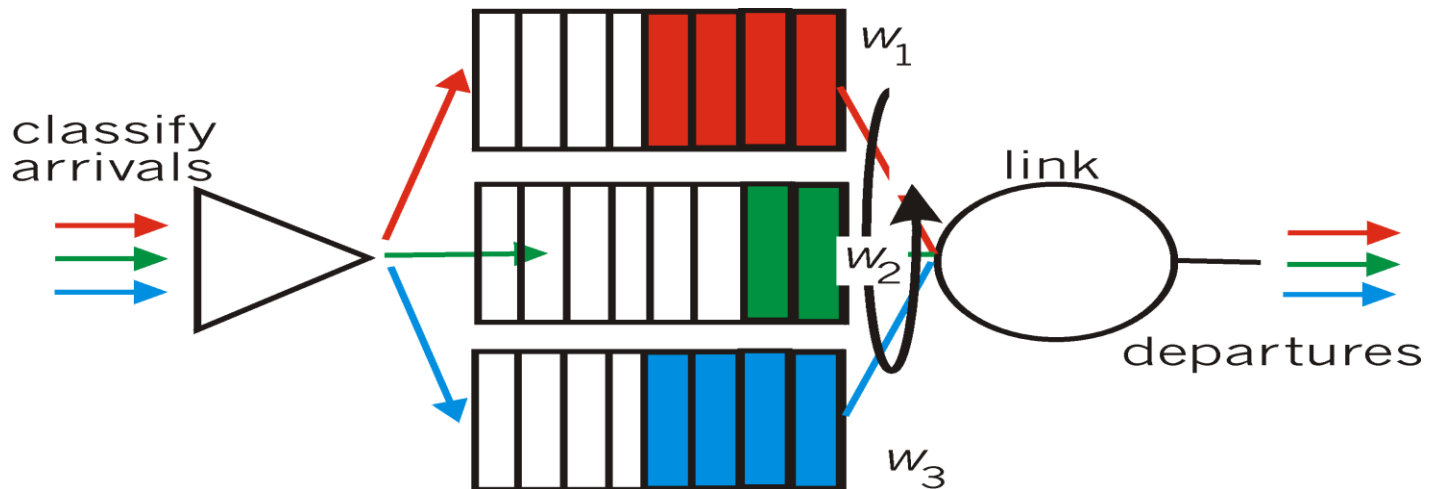


# Policing Mechanisms

- **Goal:** limit traffic to not exceed declared parameters
- Three common-used criteria:
- **(Long term) Average Rate:** how many pkts can be sent per unit time (in the long run)
  - crucial question: what is the interval length: 100 packets per sec or 6000 packets per min have same average!
- **Peak Rate:** e.g., 6000 pkts per min. (ppm) avg.; 1500 pps peak rate
- **(Max.) Burst Size:** max. number of pkts sent consecutively (with no intervening idle)

# Policing Mechanisms



- **Token Bucket:** limit input to specified Burst Size and Average Rate.

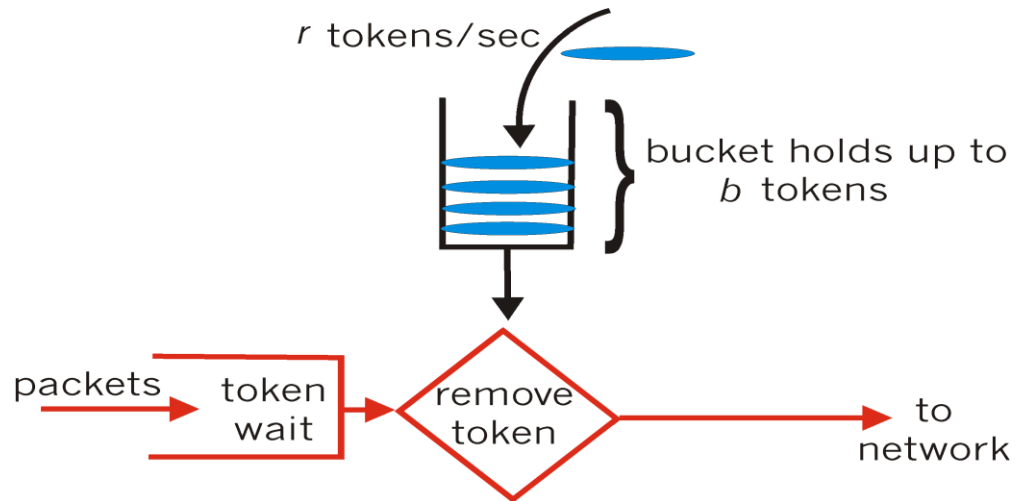

- bucket can hold  $b$  tokens
- tokens generated at rate  $r$  token/sec unless bucket full
- over interval of length  $t$ : number of packets admitted less than or equal to  $(r t + b)$ .

# Policing Mechanisms (more)

- token bucket, WFQ combine to provide guaranteed upper bound on delay, i.e., **QoS guarantee!**

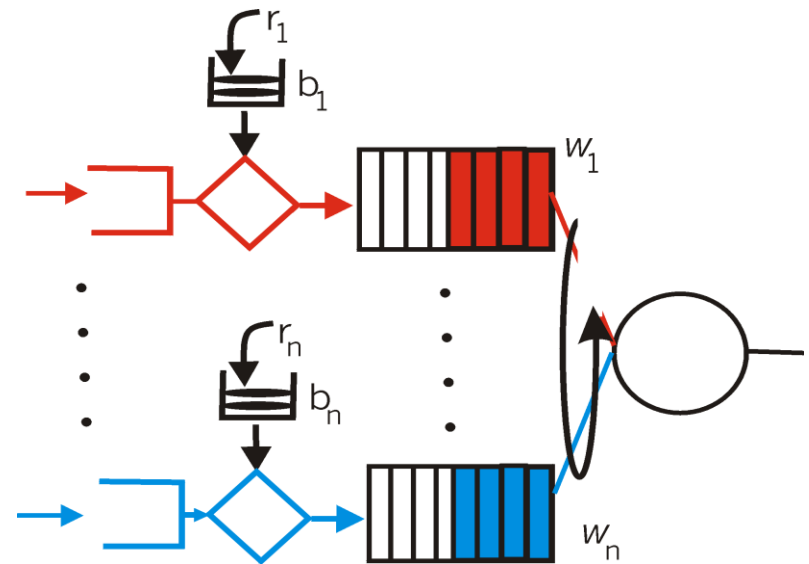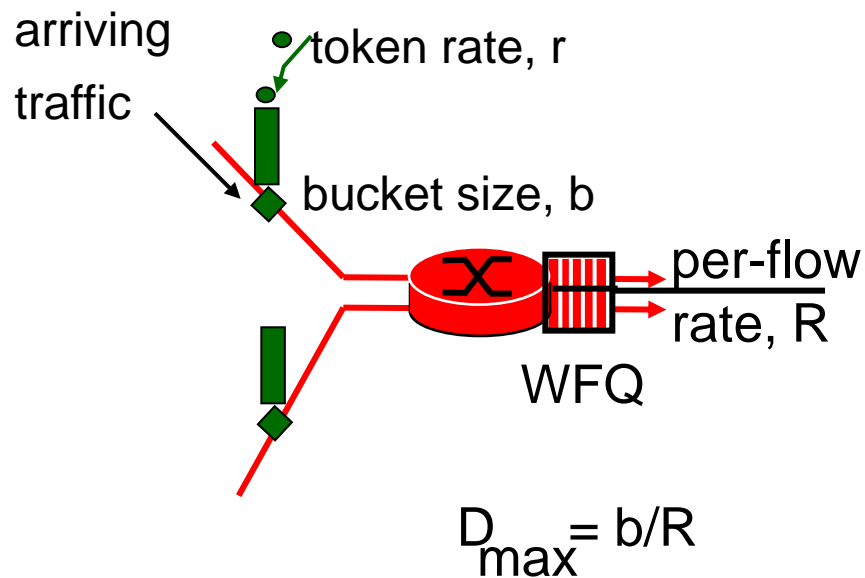

# Chapter 6 outline

- 6.1 Providing multiple classes of service
- 6.2 Differentiated Services
- 6.3 Providing QoS guarantees
- 6.4 Integrated Services
- 6.5 Resource Reservation Protocol
- 6.6 Next Steps in Signaling
- 6.7 Multiprotocol Label Switching

# IETF Differentiated Services

- want “qualitative” service classes
  - “behaves like a wire”
  - relative service distinction: Platinum, Gold, Silver
- **scalability**: simple functions in network core, relatively complex functions at edge routers (or hosts)
  - signaling, maintaining per-flow router state difficult with large number of flows
- don't define service classes, provide functional components to build service classes




# Diffserv Architecture

## Edge router:

- per-flow traffic management
- marks packets as **in-profile** and **out-profile**


## Core router:

- per class traffic management
- buffering and scheduling based on **marking** at edge
- preference given to **in-profile** packets

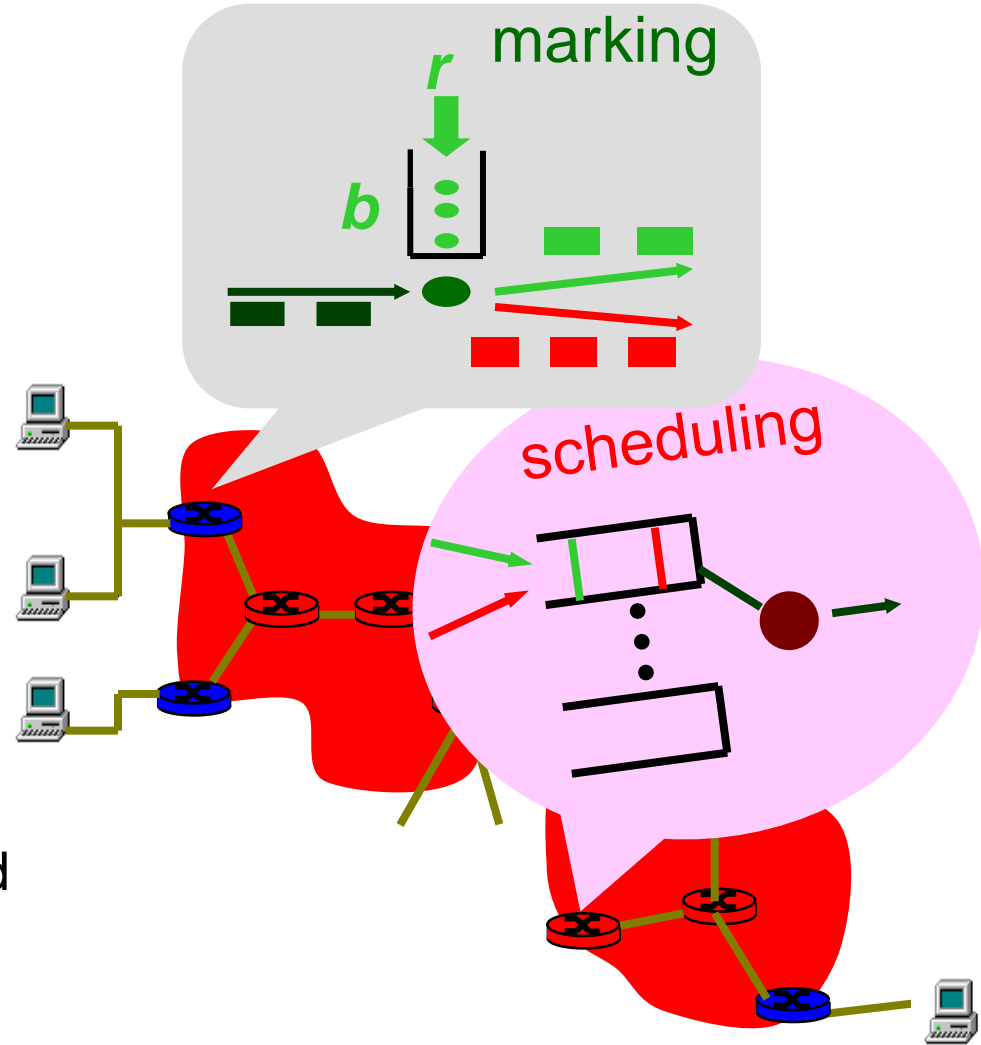

# Edge-router Packet Marking

- **profile**: pre-negotiated rate A, bucket size B
- packet marking at edge based on **per-flow** profile

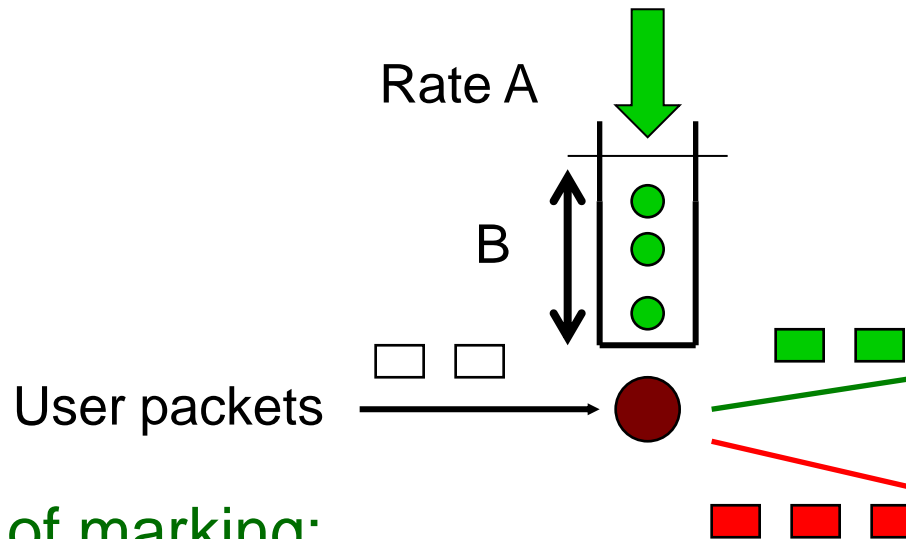

## Possible usage of marking:

- class-based marking: packets of different classes marked differently
- intra-class marking: conforming portion of flow marked differently than non-conforming one


# Classification and Conditioning

- Packet is marked in the Type of Service (TOS) in IPv4, and Traffic Class in IPv6
- 6 bits used for Differentiated Service Code Point (DSCP) and determine PHB that the packet will receive
- 2 bits are currently unused



# Classification and Conditioning

- may be desirable to limit traffic injection rate of some class:
  - user declares traffic profile (e.g., rate, burst size)
  - traffic metered, shaped if non-conforming

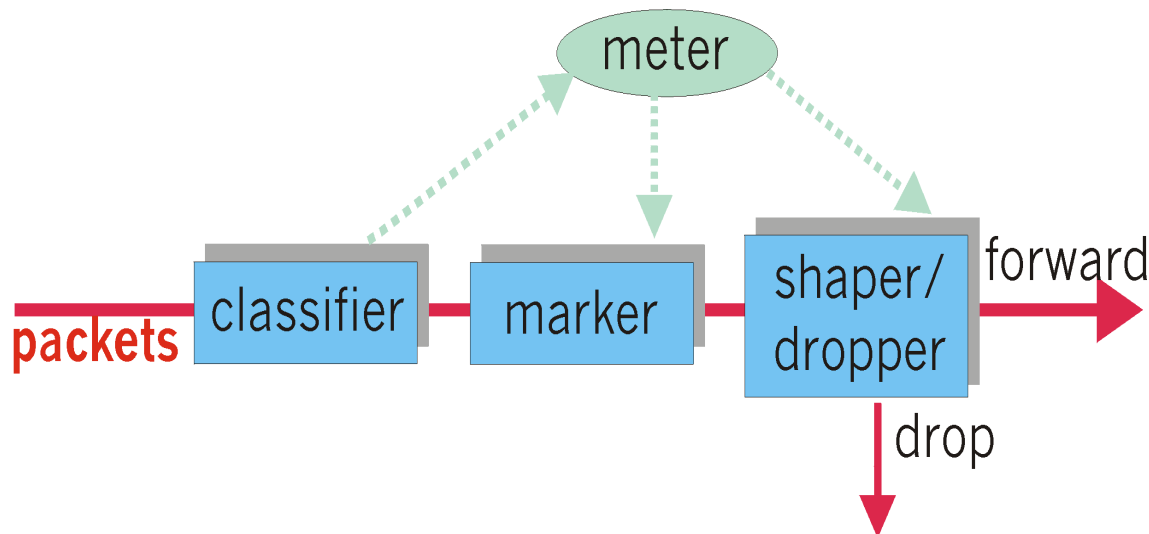

# Forwarding (PHB)

- PHB result in a different observable (measurable) forwarding performance behavior
- PHB does not specify what mechanisms to use to ensure required PHB performance behavior
- Examples:
  - Class A gets  $x\%$  of outgoing link bandwidth over time intervals of a specified length
  - Class A packets leave first before packets from class B

# Forwarding (PHB)


- PHBs being developed:
- **Expedited Forwarding:** pkt departure rate of a class equals or exceeds specified rate
  - logical link with a minimum guaranteed rate
- **Assured Forwarding:** 4 classes of traffic
  - each guaranteed minimum amount of bandwidth
  - each with three drop preference partitions

# Chapter 6 outline

- 6.1 Providing multiple classes of service
- 6.2 Differentiated Services
- 6.3 Providing QoS guarantees
- 6.4 Integrated Services
- 6.5 Resource Reservation Protocol
- 6.6 Next Steps in Signaling
- 6.7 Multiprotocol Label Switching

# Principles for QOS Guarantees (more)

- Basic fact of life: can not support traffic demands beyond link capacity

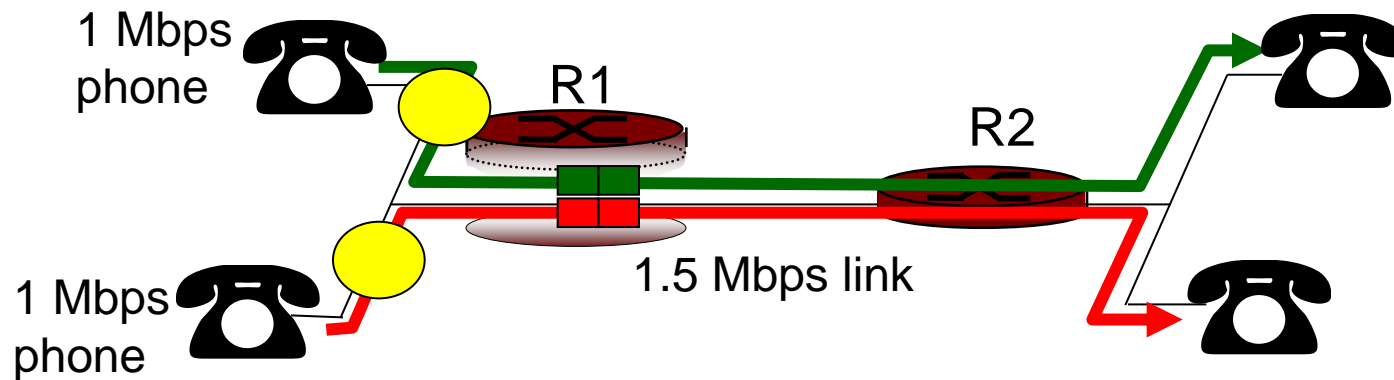


## Principle 4

Call Admission: flow declares its needs, network may block call (e.g., busy signal) if it cannot meet needs



# QoS guarantee scenario

- Resource reservation
  - call setup, signaling (RSVP)
  - traffic, QoS declaration
  - per-element admission control

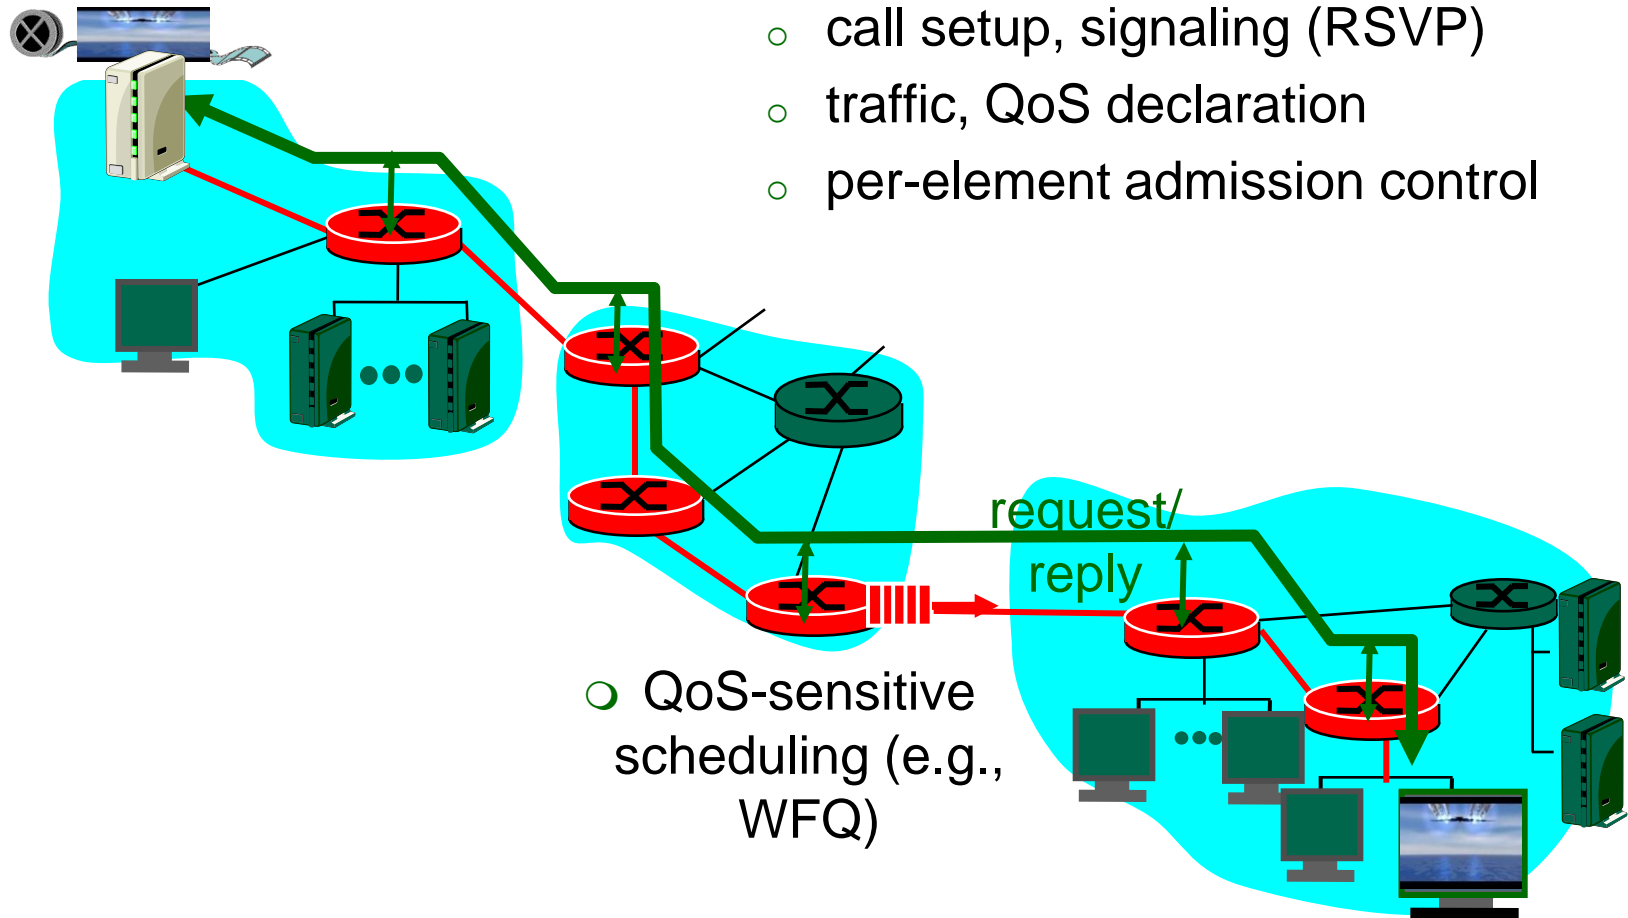

- QoS-sensitive scheduling (e.g., WFQ)

# Chapter 6 outline

- 6.1 Providing multiple classes of service
- 6.2 Differentiated Services
- 6.3 Providing QoS guarantees
- **6.4 Integrated Services**
- 6.5 Resource Reservation Protocol
- 6.6 Next Steps in Signaling
- 6.7 Multiprotocol Label Switching

# IETF Integrated Services

- architecture for providing QoS guarantees in IP networks for individual application sessions
- resource reservation: routers maintain state info of allocated resources, QoS req's
- admit/deny new call setup requests:

Question: can newly arriving flow be admitted with performance guarantees while not violating QoS guarantees made to already admitted flows?

# Call Admission

Arriving session must :

- declare its QOS requirement
  - **R-spec**: defines the QOS being requested
- characterize traffic it will send into network
  - **T-spec**: defines traffic characteristics
- signaling protocol: needed to carry R-spec and T-spec to routers (where reservation is required)
  - **RSVP**

# Intserv QoS: Service models

## [rfc2211, rfc 2212]

- Guaranteed service:
  - Determines maximum delay of a pkt to arrive at receiver
- Controlled load service:
  - "a quality of service closely approximating the QoS that the same flow would receive from an unloaded network element."

# Chapter 6 outline

- 6.1 Providing multiple classes of service
- 6.2 Differentiated Services
- 6.3 Providing QoS guarantees
- 6.4 Integrated Services
- **6.5 Resource Reservation Protocol**
- 6.6 Next Steps in Signaling
- 6.7 Multiprotocol Label Switching

# Signaling in the Internet

connectionless  
(stateless) forwarding  
by IP routers    +    best effort  
service    =    no network  
signaling protocols  
in initial IP design

- **New requirement:** reserve resources along end-to-end path (end system, routers) for QoS for multimedia applications
- **RSVP:** Resource Reservation Protocol [RFC 2205]
  - “ ... allow users to communicate requirements to network in robust and efficient way.” i.e., signaling!
- earlier Internet Signaling protocol: ST-II [RFC 1819]

# RSVP Design Goals

1. accommodate **heterogeneous receivers** (different bandwidth along paths)
2. accommodate different applications **with different resource requirements**
3. make **multicast a first class service**, with adaptation to multicast group membership
4. **leverage existing multicast/unicast routing**, with adaptation to changes in underlying unicast, multicast routes
5. **control protocol overhead** to grow (at worst) linear with increasing # of receivers
6. **modular design** for heterogeneous underlying technologies



# RSVP: does not...

- specify how resources are to be reserved
  - rather: a mechanism for communicating needs
- determine routes packets will take
  - that's the job of routing protocols
  - signaling decoupled from routing
- interact with forwarding of packets
  - separation of control (signaling) and data (forwarding) planes

# RSVP: overview of operation

- senders, receiver join a multicast group
  - done outside of RSVP
  - senders need not join group
- sender-to-network signaling
  - *path message*: make sender presence known to routers, detect a possible path to receiver
  - path teardown: delete sender's path state from routers
- receiver-to-network signaling
  - *reservation message*: reserve resources from sender(s) to receiver
  - reservation teardown: remove receiver reservations
- network-to-end-system signaling
  - path error
  - reservation error

# Chapter 6 outline

- 6.1 Providing multiple classes of service
- 6.2 Differentiated Services
- 6.3 Providing QoS guarantees
- 6.4 Integrated Services
- 6.5 Resource Reservation Protocol
- 6.6 Next Steps in Signaling
- 6.7 Multiprotocol Label Switching

# Next Steps in Signaling (NSIS)


- RSVP not widely used for resource reservation
  - But used for MPLS path setup
  - Design heavily biased by multicast needs
  - Limited ability signaling delivery any size of signaling & over congested situation
  - Marginal and after-the-fact security
  - Limited support for IP mobility

# NSIS (cont'd)

- Thus, IETF NSIS working group developing new framework for general state management protocol
  - resource reservation
  - NAT and firewall control
  - traffic and QoS measurement
  - MPLS and lambda path setup
- Split into two components:
  - NSIS Signaling Layer Protocol (NSLP)
  - NSIS Transport Layer Protocol (NTLP)

# NSIS (cont'd)

- On-path vs. off-path
  - off-path → bandwidth brokers
- Discovery of next NTLP or NSLP hop
  - use router alert option

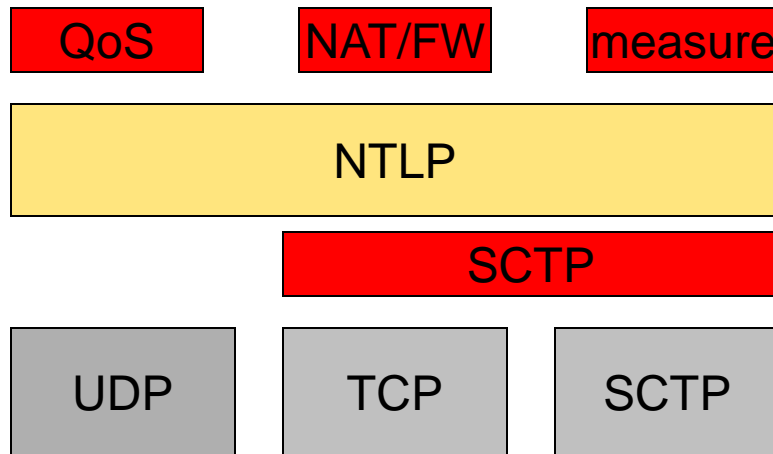


# Chapter 6 outline

- 6.1 Providing multiple classes of service
- 6.2 Differentiated Services
- 6.3 Providing QoS guarantees
- 6.4 Integrated Services
- 6.5 Resource Reservation Protocol
- 6.6 Next Steps in Signaling
- **6.7 Multiprotocol Label Switching**

# Multiprotocol Label Switching (MPLS)

- *Original motivation:* improve forwarding speed of IP routers.
- MPLS introduces a **fixed-length label** between layer-2 (i.e. PPP or Ethernet) header and layer-3 (i.e. IP) header.

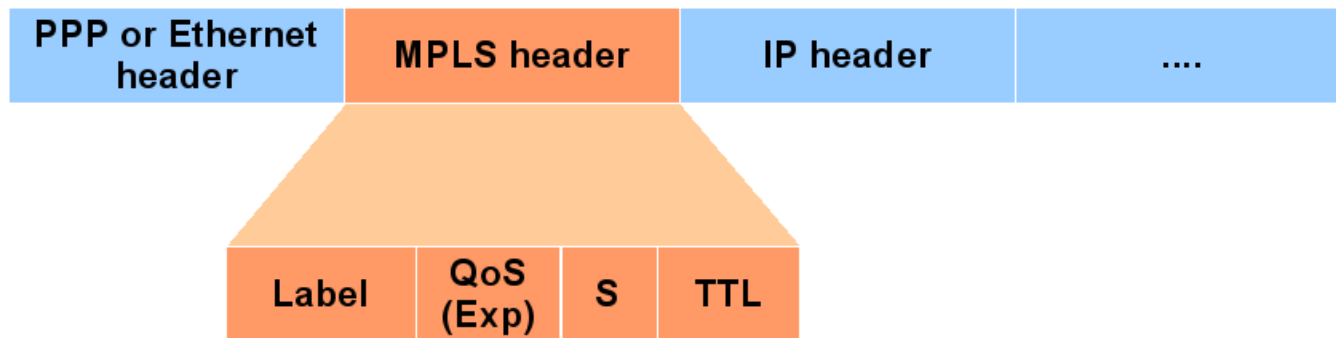




# Introduction to MPLS


- **Conventional IP (Layer-3) forwarding:**  
Each router analyzes the incoming packet's header and independently chooses a next hop. Routing algorithm and adequate speed are prerequisite.
- **MPLS (Layer-2.5) forwarding:**  
All forwarding is driven by the labels, no header analysis needed. Once a packet enters a network, it's assigned a label. Each router forwards packets according to their labels.

# IP Forwarding

- Longest-prefix match based on packet's destination IP address

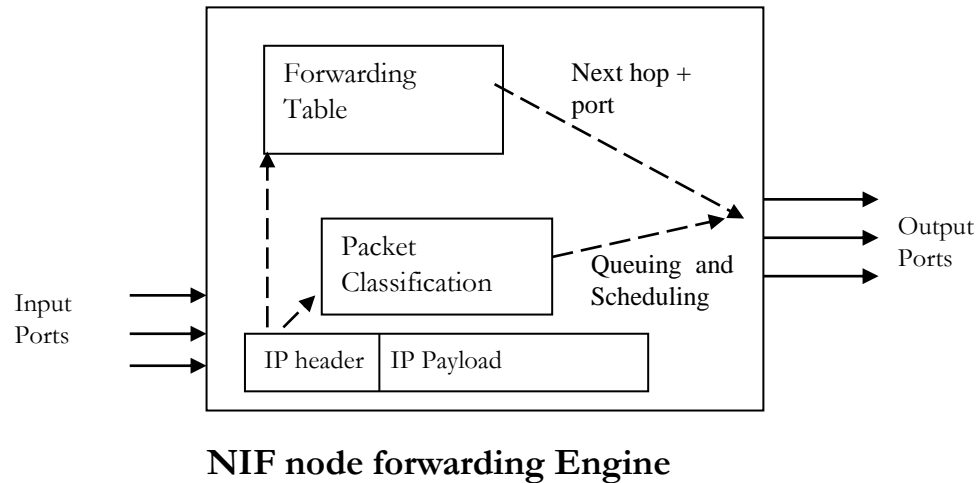


# IP Forwarding (cont'd)

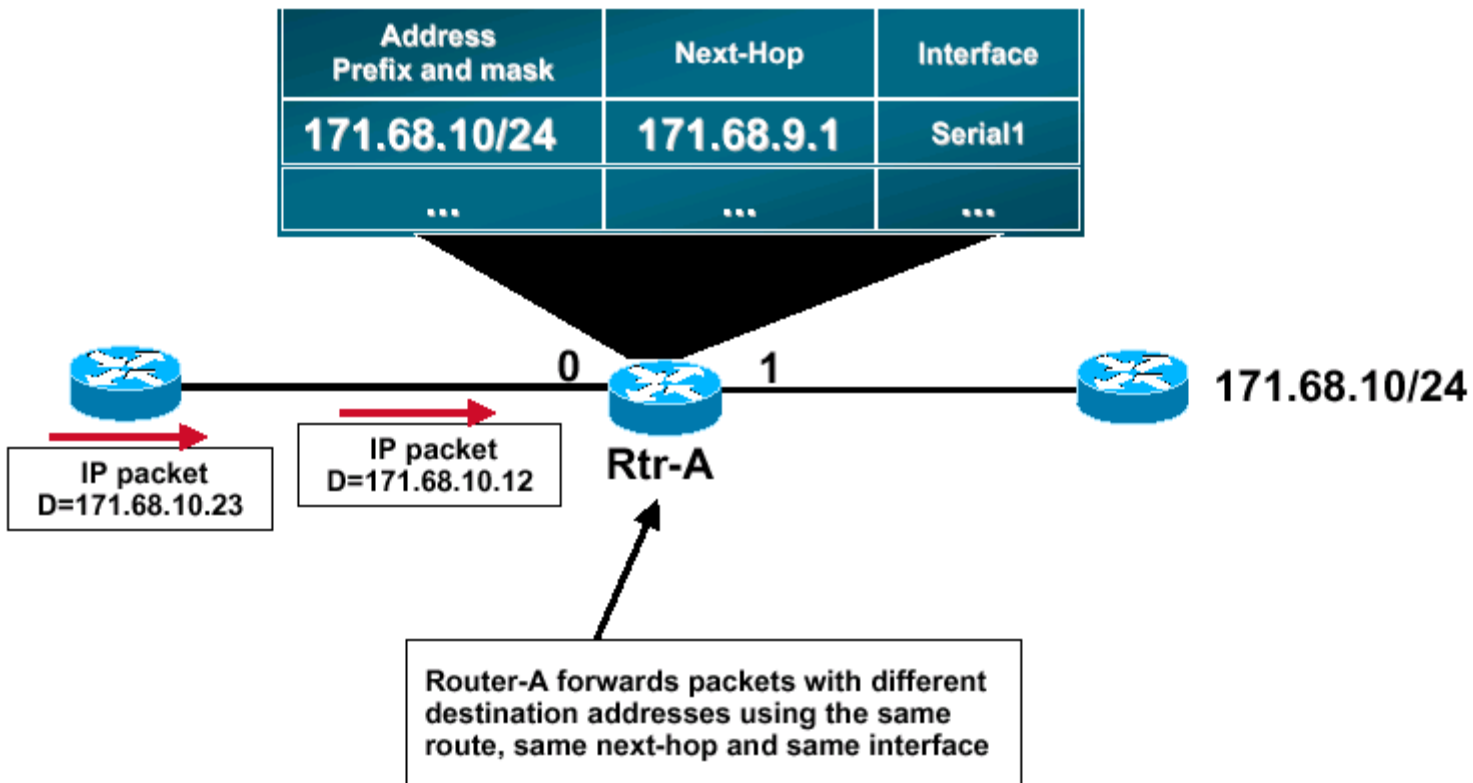

# MPLS forwarding

In I/F	In Lab	Address Prefix	Out I/F	Out Lab
4	x	171.68.10	3	5
...	...	...	...	...

In I/F	In Lab	Address Prefix	Out I/F	Out Lab
0	5	171.68.10	1	3
...	...	...	...	...

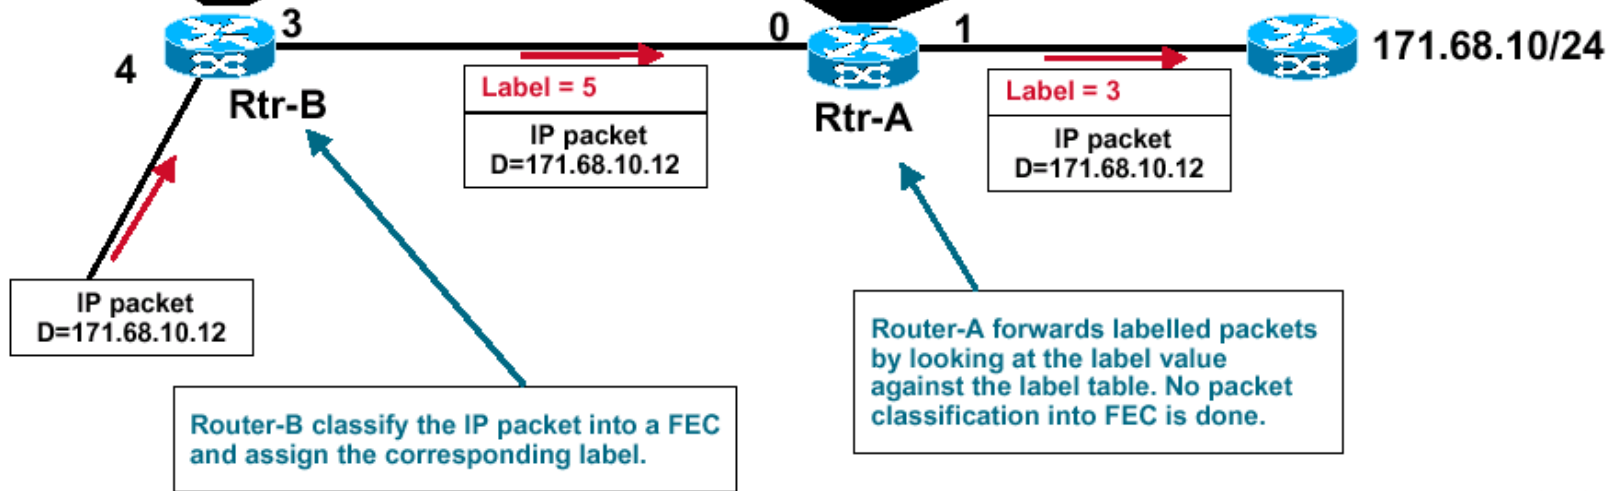

**FEC:**  
Forwarding  
Equivalence  
Class

# MPLS Applications

- Quality of Service.
- Traffic separation: Virtual Private Networks.

# Summary

- Principles
  - classify multimedia applications
  - identify network services applications need
  - making the best of best effort service
- Protocols and Architectures
  - specific protocols for best-effort
  - mechanisms for providing QoS
  - architectures for QoS
    - multiple classes of service
    - QoS guarantees, admission control

# Thank you

Any questions?