


Introduction

Advanced Computer Networks
Summer Semester 2015

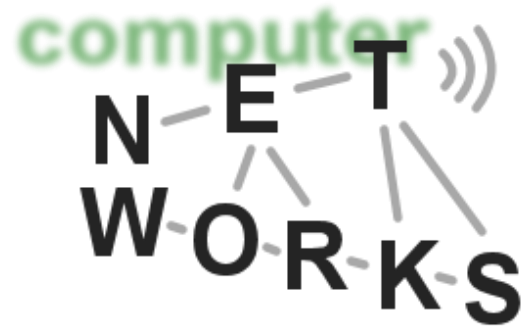

Organizational Information

- [https://wiki.net.informatik.uni-goettingen.de/wiki/Advanced_Computer_Networks_\(Summer_2015\)](https://wiki.net.informatik.uni-goettingen.de/wiki/Advanced_Computer_Networks_(Summer_2015))
- Slides are available online
- Course is held in English

- 5 ECTS credits
- AI: M.Inf.1222.Mp, M.Inf.1223.Mp
- ITIS: 3.17

Organizational Information

- Exam: Oral or Written (depending on student numbers)
 - Written: Last week of lecture time (July 16th)
 - Oral: Dates TBD
- Check the FlexNow registration deadlines

Course Overview



- This course covers:
 - A recap of traditional networks
 - (1 lecture, today)
 - A discussion of problems we face in these networks
 - (2 lectures, Dr. Mayutan Arumaithurai)
 - A couple of advanced networking technologies:
 - Information-centric networking (2 lectures, Dr. Jiachen Chen)
 - Software-defined networking (2 lectures, Dr. David Koll)
 - Datacenter networking (1 lecture, Dr. David Koll)
 - Peer-to-Peer networking (1 lecture, Prof. Dr. Xiaoming Fu)
 - Wireless networking (2 lectures, Dr. Stephan Sigg)

Course Overview

Date	Topic
16.04.2015	Introduction
23.04.2015	NO LECTURE (Girls Day)
30.04.2015	Advanced Topics in Wireless Networks I
07.05.2015	Advanced Topics in Wireless Networks II
14.05.2015	NO LECTURE (Public Holiday)
21.05.2015	Advanced Topics in P2P
28.05.2015	Problems with the current way of Networking I
04.06.2015	Problems with the current way of Networking II
11.06.2015	New Networking Techniques I
18.06.2015	New Networking Techniques II
25.06.2015	New Networking Techniques III
02.07.2015	New Networking Techniques IV
09.07.2015	New Networking Techniques V
16.07.2015	Examination


Course Materials - Basics

- J. Kurose and K. Ross, "Computer Networking: A Top-Down Approach Featuring the Internet" (some slides are based on the book)
- A. S. Tanenbaum, "Computer Networks"
- Further materials are released on the wiki

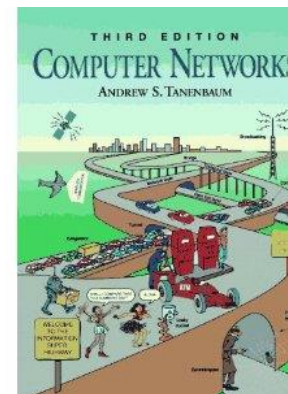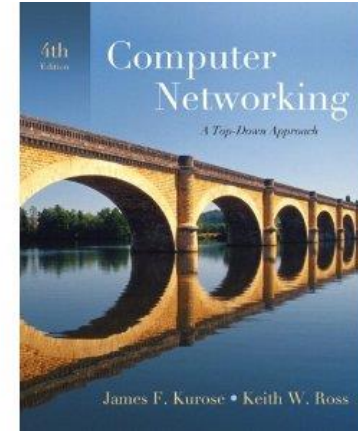


Course Materials - Advanced

- Peer-to-Peer Networks
 - Mahlmann and Schindelbauer, Peer-to-Peer Netzwerke: Methoden und Algorithmen, Springer, 2007, german

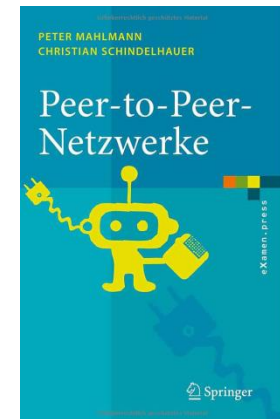


- Wireless Networks
 - Pim Tuyls et al, Security with Noisy Data, Springer, 2007

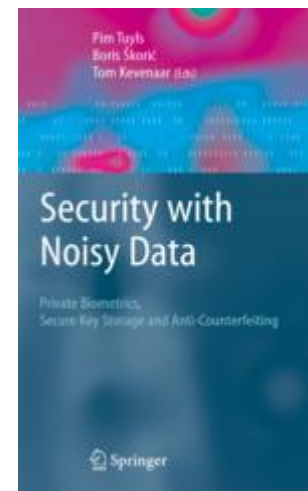

Course Materials - Advanced

- New Networking Technologies
 - Paul Goransson and Chuck Black, Software Defined Networks: A Comprehensive Approach (1st edition), Morgan Kaufmann, 2014.

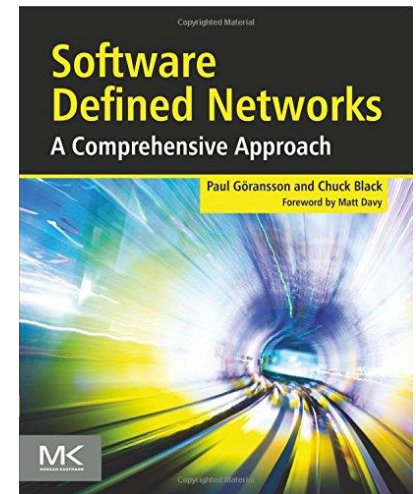


Recap of Basics

- The following slides repeat fundamentals for advanced networks:
 - Protocols / Layering
 - The hierarchical structure of the Internet
 - Addressing on the different layers
 - Routing and IP subnet aggregation
 - Layer 4 services such as reliable data transfer
- If something is new for you, please review the Computer Networks slides at:
[https://wiki.net.informatik.uni-goettingen.de/wiki/Computer_Networks_\(Winter_2014/2015\)](https://wiki.net.informatik.uni-goettingen.de/wiki/Computer_Networks_(Winter_2014/2015))

What is the Internet?


What is the Internet?

- millions of connected computing devices: *hosts, end-systems*
 - PCs, workstations, servers
 - PDAs, phones, toasters
 - running *network apps*
- *communication links*
 - fiber, copper, coax, radio, satellite
 - transmission rate = *bandwidth*
- *routers*: forward packets (chunks of data)

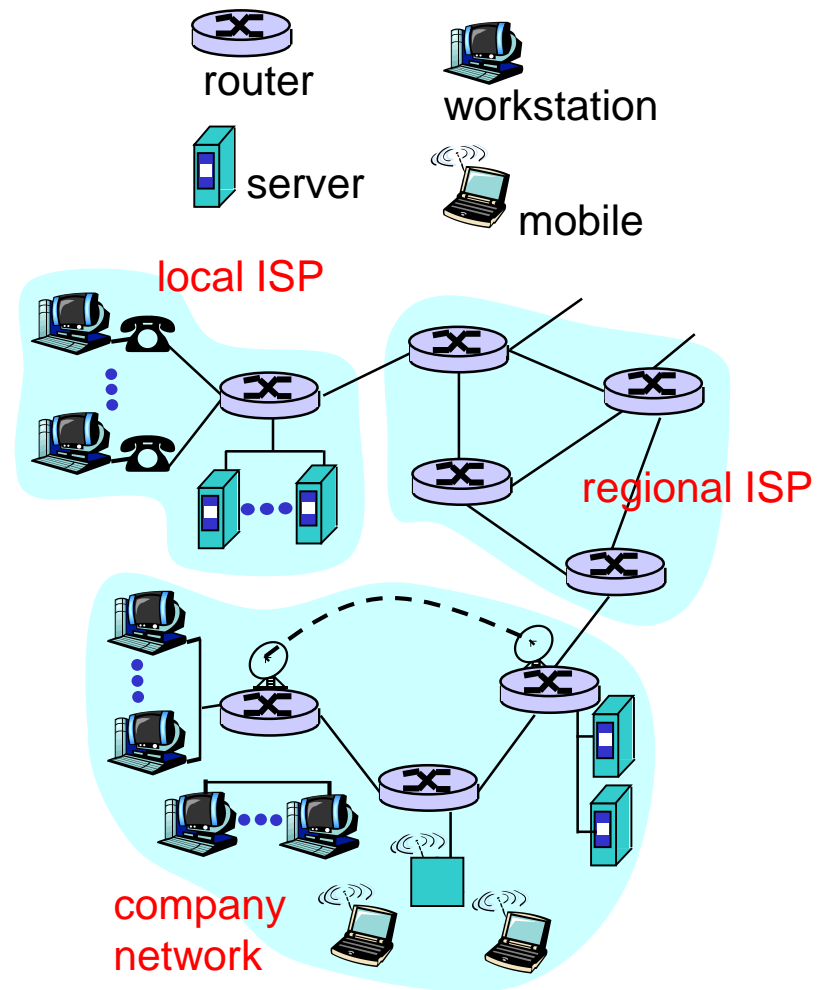

What is the Internet?

- *protocols* define format, order of msgs sent and received among network entities, and actions taken on msg transmission, receipt
- *Internet*: “network of networks”
 - loosely hierarchical
 - public Internet versus private intranet
- *Internet standards*
 - RFC: Request for Comments
 - IETF: Internet Engineering Task Force

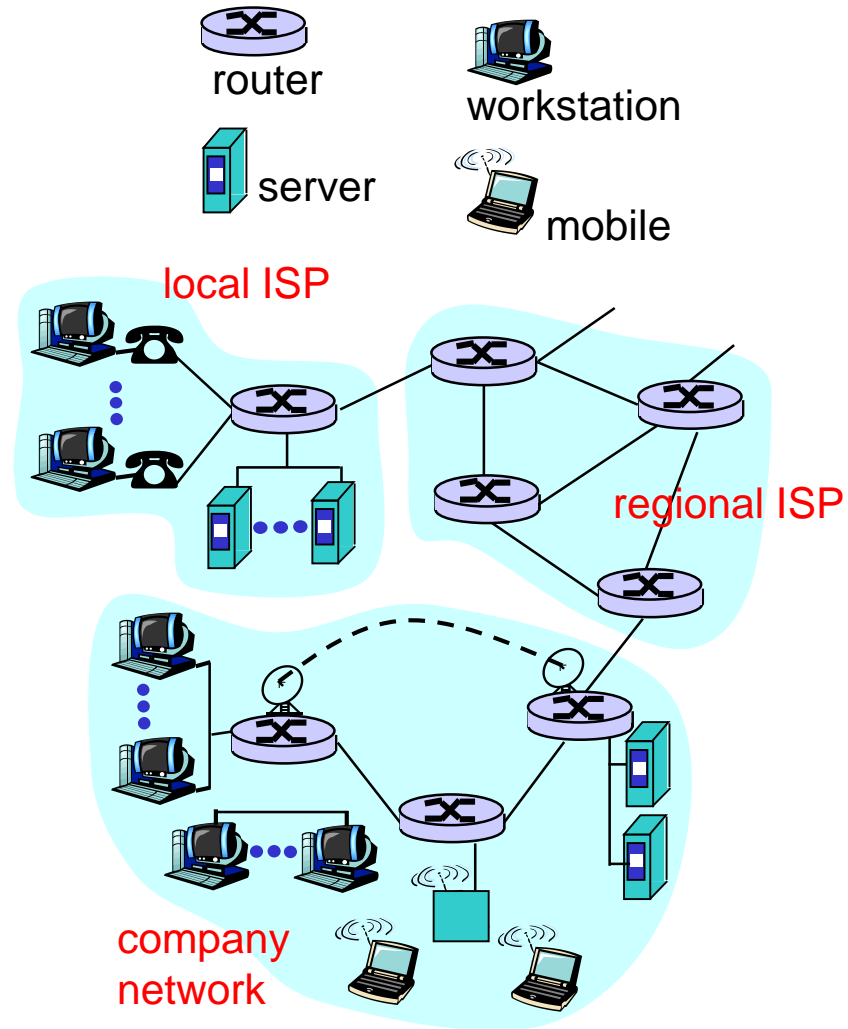

What is the Internet?

- The network is typically divided into the network core and the network edge
 - **Edge**: end systems, access networks, links
 - **Core**: circuit switching, packet switching, network structure, routers etc.
- Users access the Internet from the edge: e-mail, http web access, applications, social networks


At the edge

- client/server model

- client host requests, receives service from always-on server
- e.g. web browser/server; email client/server
- **Is that optimal for large scale?**

- peer-peer model: client/server

- minimal (or no) use of dedicated servers
- e.g. Skype, BitTorrent

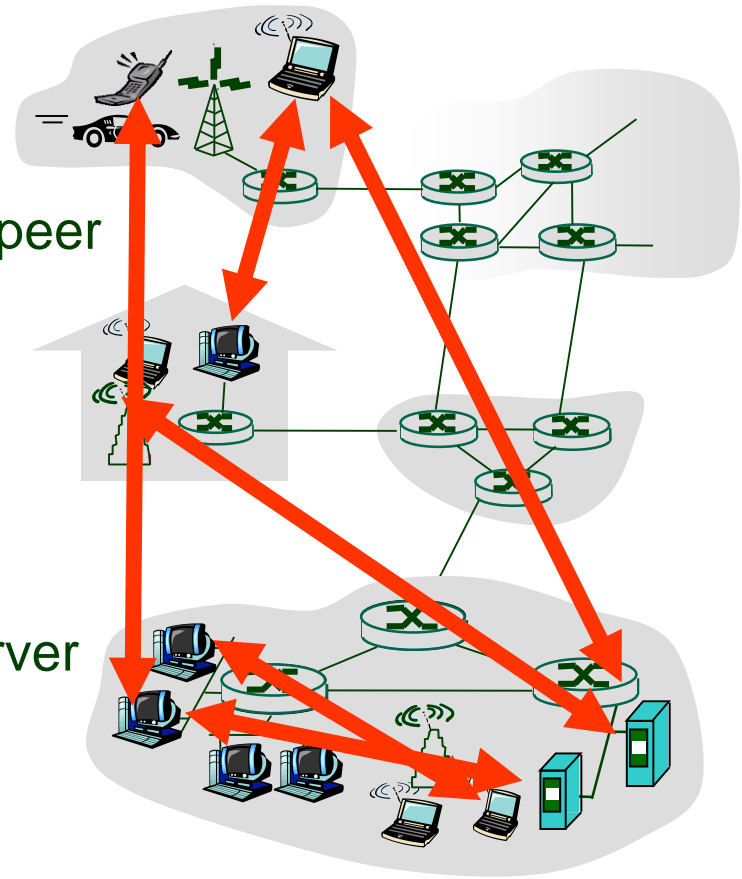


Packet Switching Implications

- End data stream is divided into „packets“
- Multiple users **share** network resources
 - Sequence of packets does not have fixed pattern, this effect is called **statistical multiplexing**
 - Each packet uses full bandwidth
 - Resources are used as needed
- **No dedicated resource allocation!**
- **Demand may exceed resources:**
 - Congestion, delay, loss

Hierarchical Structure

- A packet traverses multiple networks from source to destination!

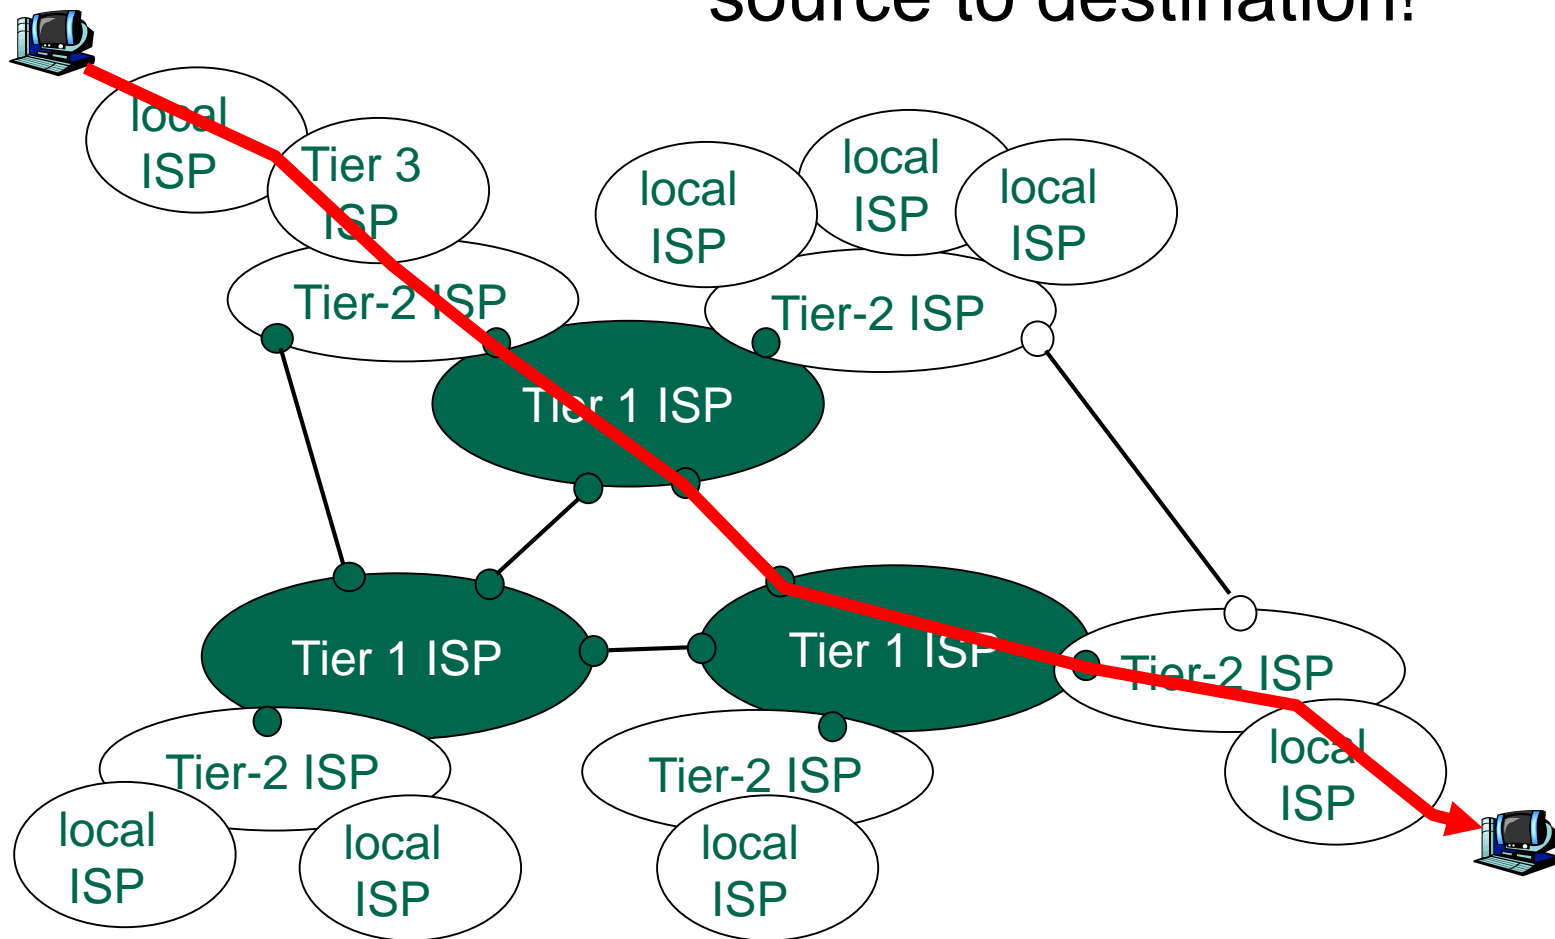

Impact of Hierarchy


- Main goal accomplished:
 - Efficient, works!
- But:
 - Providers have to buy resources from higher tiers or exchange directly on low tier level (peering)
 - Transferring data through external network is costly
 - Many modern technologies make it relevant **HOW** a packet traverses through the net
 - File sharing consumes large of resources, P2P is not business model of providers! Providers have an incentive to control P2P flows!
 - Efficient content delivery of large amounts of data (IP-Television, Video etc...)

Protocol Layering

- Networks are complex and consist of many pieces: hosts, routers, links, applications, protocols et cetera...
- Idea: Simplify by using layers to distinguish organizational parts of networking.
- Inspired by other, real-world „layered“ processes


Internet Protocol Stack

- Application: network apps
 - FTP, SMTP, HTTP
- Transport: process-to-process data transfer
 - TCP, UDP
- Network: routing of datagrams from source to destination
 - IP, other routing protocols
- Link: data transfer between neighboring network elements
 - PPP, Ethernet
- Physical: bits „on the wire“

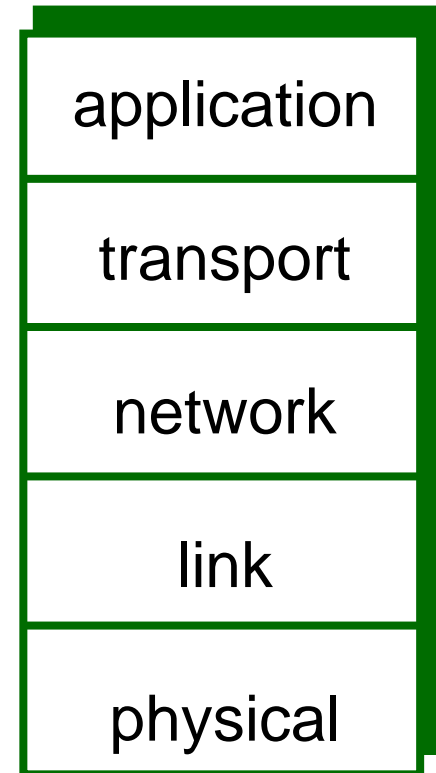

ISO/OSI Reference Model

- **Presentation:** allow applications to interpret meaning of data, e.g., encryption, compression, machine-specific conventions
- **Session:** synchronization, checkpointing, recovery of data exchange
- Internet stack “missing” these layers!
 - these services, *if needed*, must be implemented in application
 - needed?

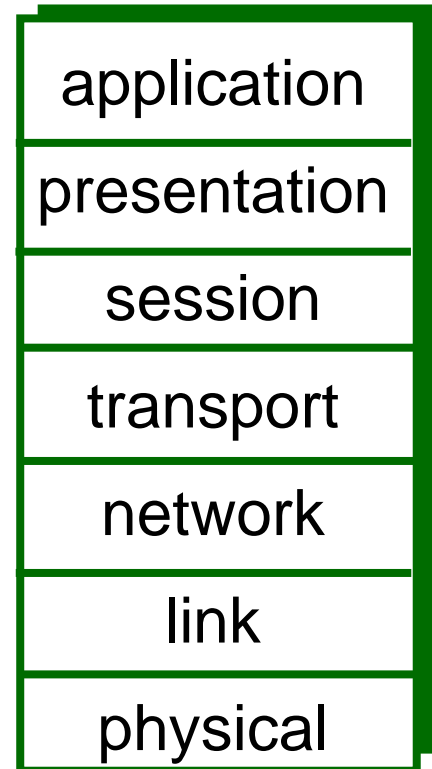

Layering Challenges

- Many modern networks are application level networks
 - Social Networks such as Facebook, Twitter etc.
- P2P networks are a mixture of different layers
 - Sometimes implementing application level data lookup, packet (chunk) forwarding etc.
- Large scale applications demand optimizations on various levels:
 - Content delivery of large data streams!

Layer 2 - Principles

- Switch processes up to layer 2
- Principles:
 - Reliable transmission of data over a link
 - Error detection, correction
 - Sharing a broadcast channel: multiple access
 - Link layer addressing
- Layer 2 packet is referred to as **frame**


data-link layer has responsibility of transferring datagram from one node to adjacent node over a link

Layer 2 – Error Detection

- Implemented in layer 2 adaptors (network interface cards etc.)
- Idea: Combine data payload with a Checksum to detect transmission errors
- Implemented using **Cyclic Redundancy Checksum**
- Typically frame is dropped if error occurred. Re-transmit (reliability) has to be implemented at other layer

Layer 2 – Multiple Access Prot.

- In general two types of „links“:
 - Point-to-Point (e.g., PPP for dial-up, link between Ethernet switch and host)
 - Broadcast medium
 - Shared wire in old Ethernet
 - 802.11 wireless LAN



shared wire (e.g.,
cabled Ethernet)

- In broadcast:
 - Distributed algorithms determine how nodes share channel and transmit
 - No „out-of-band“ channel for coordination

Layer 2 – Addressing


- 48 BIT MAC address
 - Burned in NIC Rom (sometimes software settable)
 - Should be unique (vendors have MAC-ranges)
 - No hierarchical or aggregatable information! Also called **flat address**.
- IP to MAC address resolved using the Address Resolution Protocol (ARP)
 - Idea: Broadcast query: „Who has IP ...?“. Host with queried IP replies unicast „IP ... is at MAC ...“.

Layer 2 – Forwarding

- Solved by switches
 - Learns in a plug and play mode, no configuration necessary!
 - Question: On what switch-port to forward incoming dataframe
 - If destination MAC is known (in forwarding table) and associated to a port, use that port
 - If destination MAC is unknown, broadcast the dataframe on all ports
 - If a packet with an unknown source MAC is observed, create an entry in the forwarding table that binds port to MAC
- Only works in the broadcast domain! No routing!

Layer 3 – Principles

- Internet Protocol dominant networking technology
- Network layer transports datagrams from sending to receiving host
- Protocol runs in every host and router (not in switches!)

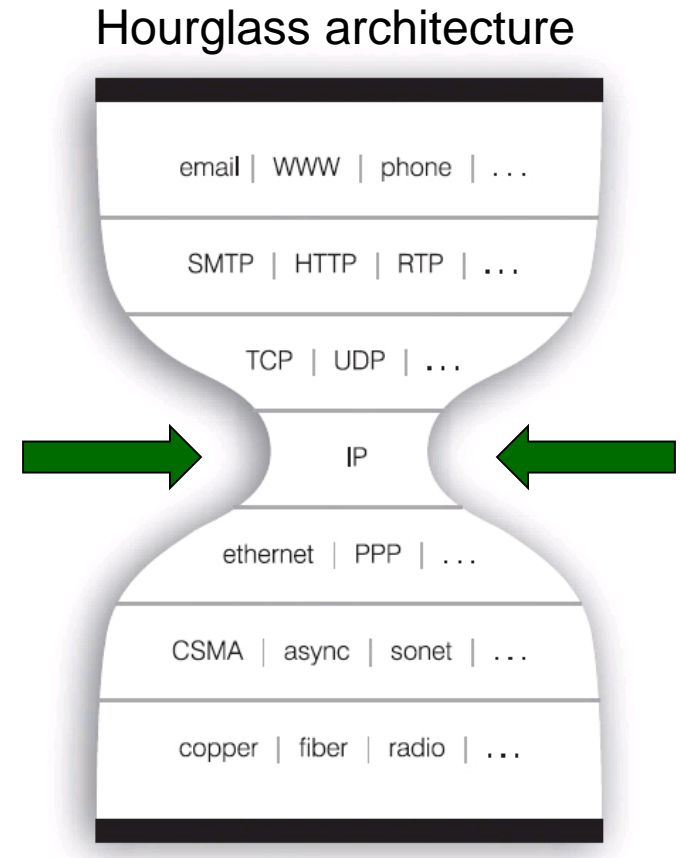


© Jonathan L. Zittrain (<http://yupnet.org/zittrain/archives/13>)

Layer 3 – Routing

- Routing: determine the route taken by packets from source to destination
 - Analogy: planning a road trip from one city to another
- Functions of a router:
 - Forward datagram from incoming to outgoing link
 - Select outgoing link by running a routing algorithm
 - Examples: RIP, OSPF, BGP
- Routers buffer packets (buffer size rule of thumb: Round-Trip-Time times link capacity)
 - Buffering source of delay, overflowing buffer causes loss

Layer 3 – Addressing


- IP address: 32 bit identifier for host, router interface
- Interface: connection between host/router and physical link
 - Routers typically have multiple interfaces
 - Hosts typically have one interface
 - IP address associated with each interface

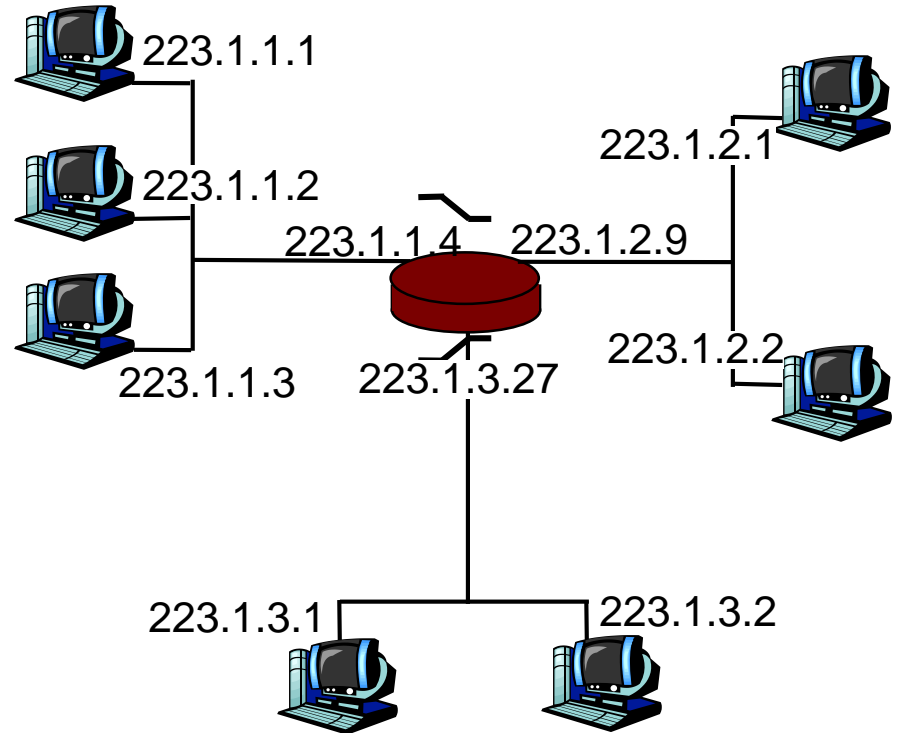

$$223.1.1.1 = \underbrace{11011111}_{223} \underbrace{00000001}_1 \underbrace{00000001}_1 \underbrace{00000001}_1$$

Layer 3 – Subnets

- IP address not flat
- Hierarchical structure of „subnets“
- Inside a subnet:
 - All device interfaces share part of IP address
 - Devices can reach each other without intervening a router

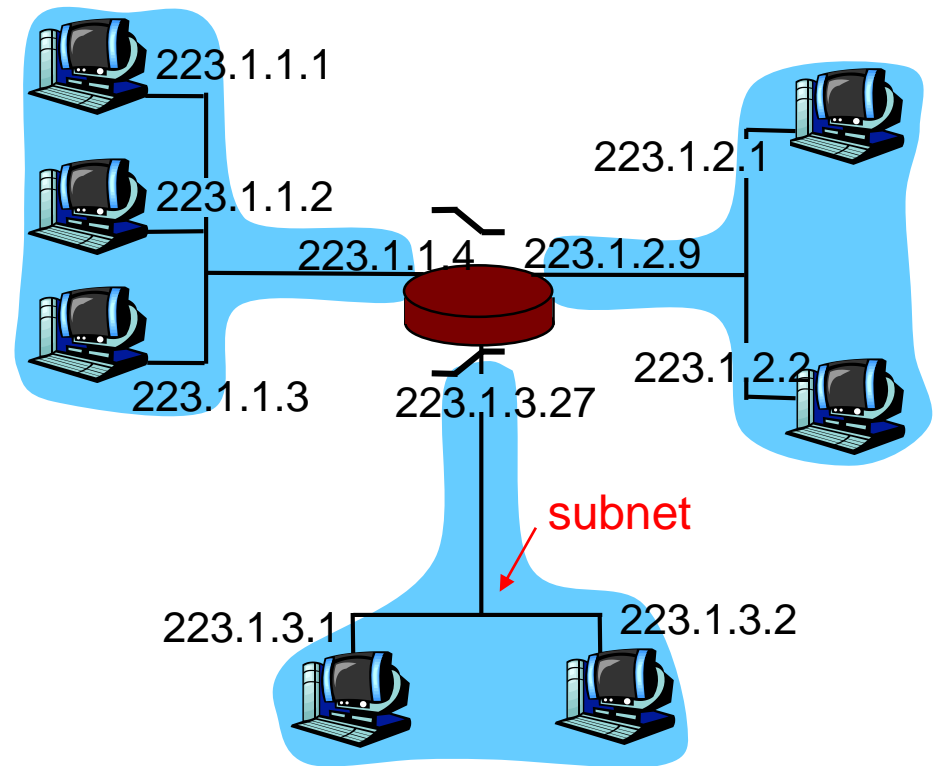


network consisting of 3 subnets

Layer 3 – How to get an IP?

- MAC address was set by vendor
- IP needs to be obtained from ISP
 - Either in a fixed configuration
 - Or using the Dynamic Host Configuration Protocol (DHCP) (server offers service and hosts request IPs)
- How does the ISP get address space?
 - Allocated by higher Tier! (remember the hierachy)
 - Highest assignment done by Internet Assigned Numbers Authority (IANA) via ICANN in the US

Layer 3 – Aggregation


- Hierarchical addresses allow to aggregate some prefixes:

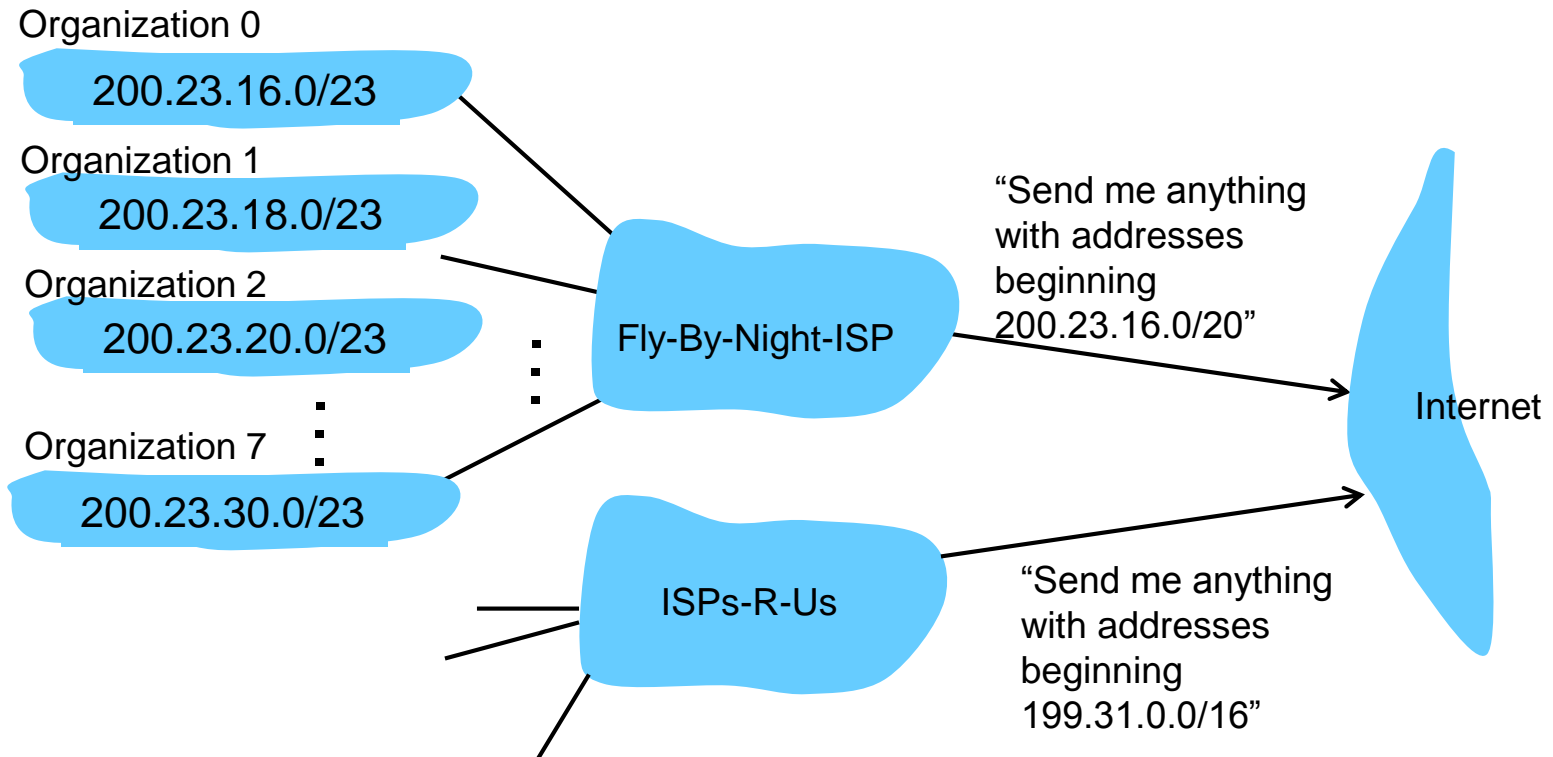

Layer 3 – NAT

- Network address translation (NAT) allows local network to have more users than assigned IP addresses!
 - Use one IP address for all devices
 - Addresses inside the network can change without need to notify the outside world
 - The ISP may change without changes necessary inside the network
 - Devices inside the local network are not explicitly addressable by the outside world!
 - Security plus but makes connections more difficult!

Layer 3 – NAT

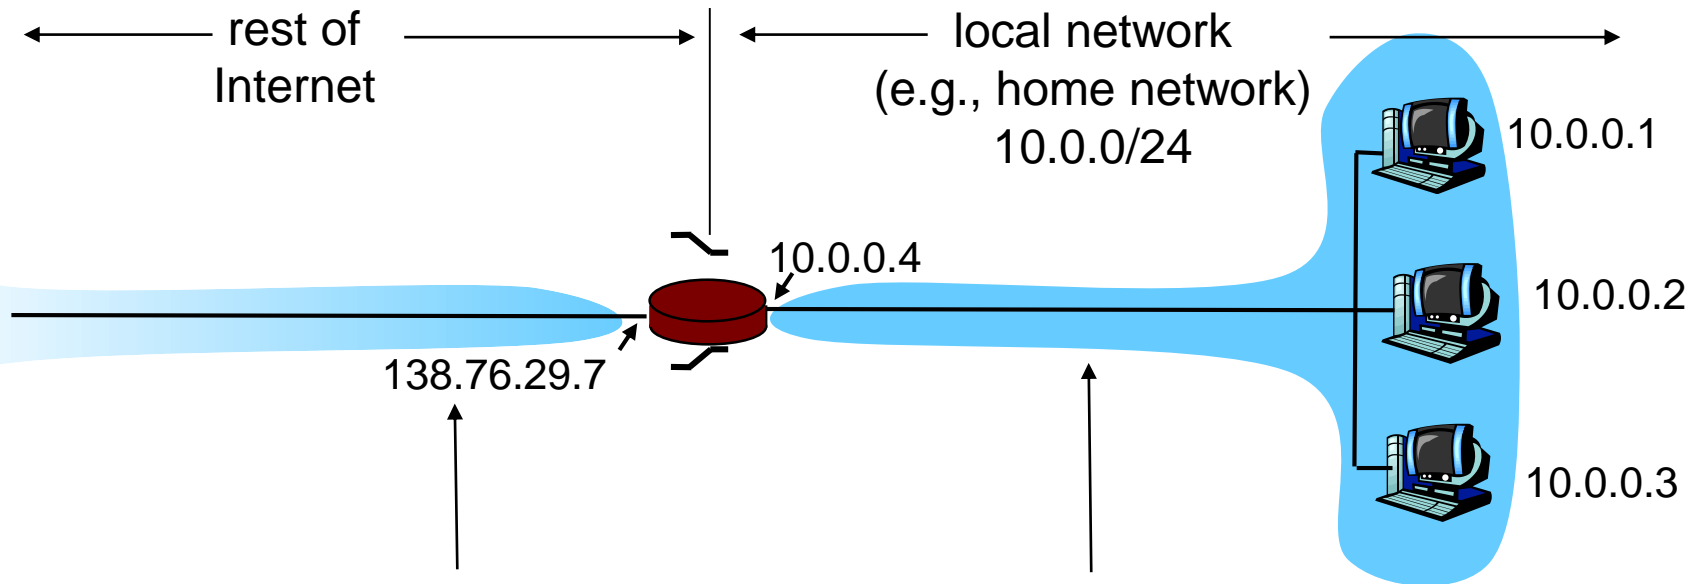

All datagrams *leaving* local network have **same** single source NAT IP address: 138.76.29.7, different source port numbers

Datagrams with source or destination in this network have 10.0.0/24 address for source, destination (as usual)

Layer 3 – NAT Challenges

- NAT violates end-to-end argument
- NAT traversal hard to solve for certain applications, for example P2P
- Address shortage should instead be solved by IPv6

Layer 3 – Routing

- Internet divided into Autonomous Systems (ASes)
- AS internal routing = intra-AS routing
 - E.g., OSPF
- Routing between ASes = inter-AS routing
 - E.g., BGP


Layer 3 – Intra-AS: OSPF

- “open”: publicly available
- uses Link State algorithm
 - LS packet dissemination
 - topology map at each node
 - route computation using Dijkstra’s algorithm
- OSPF advertisement carries one entry per neighbor router
- advertisements disseminated to entire AS (via flooding)
 - carried in OSPF messages directly over IP (rather than TCP or UDP)

Layer 3 - OSPF features

- **Security**: all OSPF messages authenticated (to prevent malicious intrusion)
- **multiple** same-cost **paths** allowed
- For each link, multiple cost metrics for different **TOS**
- Integrated uni- and **multicast** support:
 - Multicast OSPF (MOSPF) uses same topology data base as OSPF
- **Hierarchical** OSPF in large domains.

Layer 3 - Hierarchical OSPF

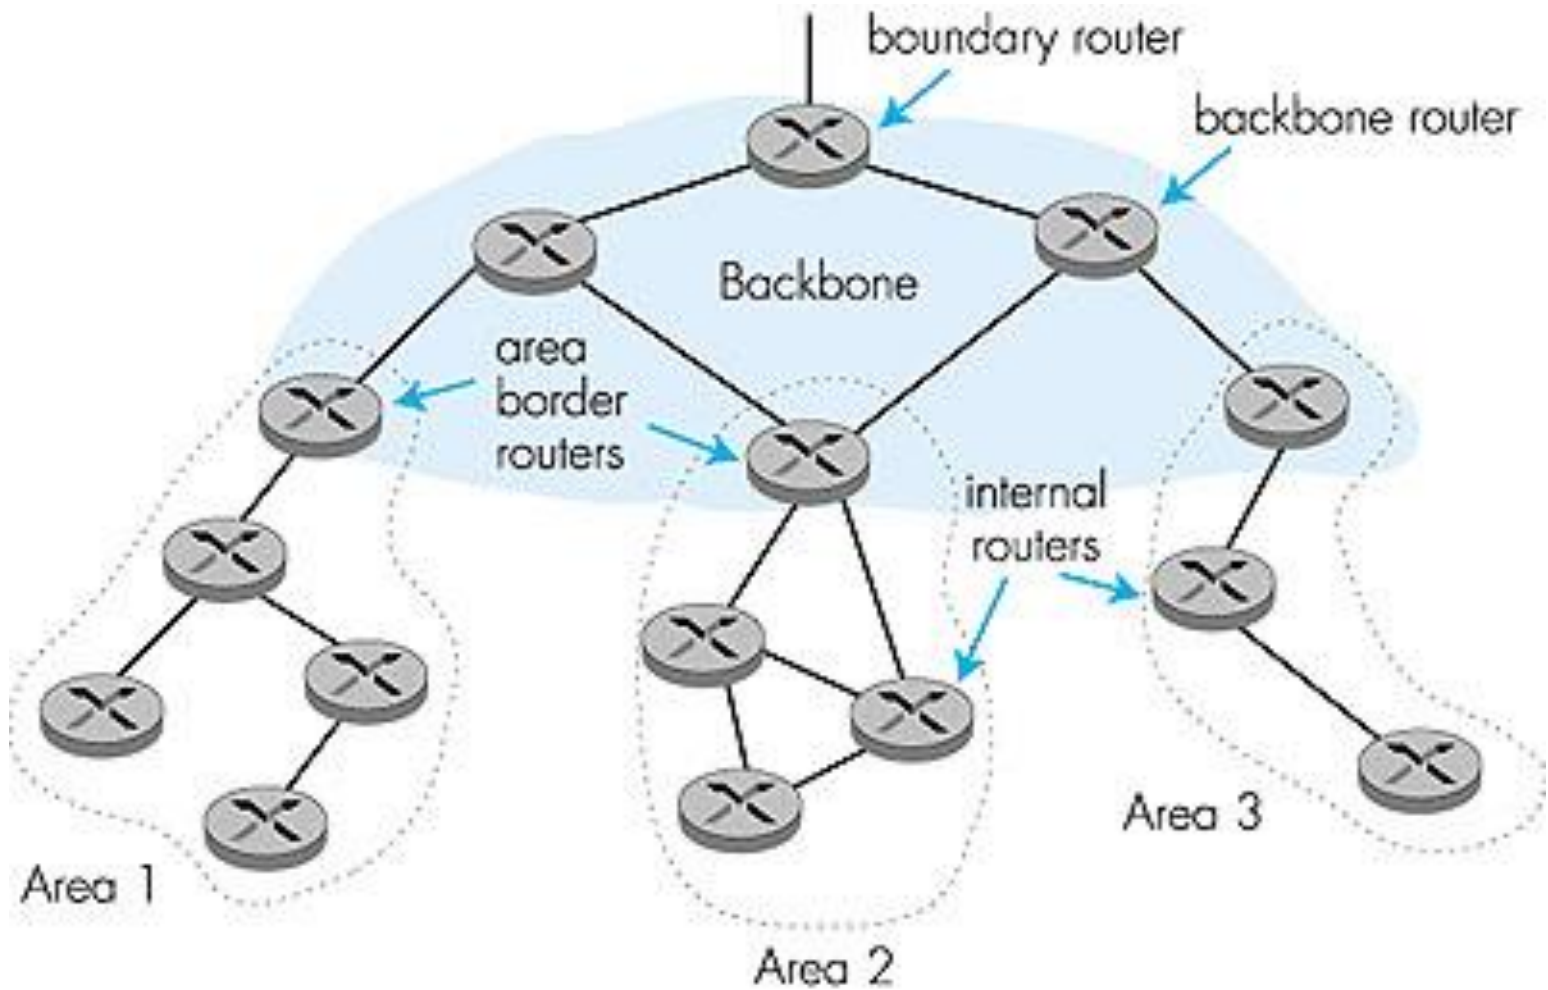

Layer 3 - Hierarchical OSPF


- **two-level hierarchy:** local area, backbone.
 - Link-state advertisements only in area
 - each nodes has detailed area topology; only know direction (shortest path) to nets in other areas.
- **area border routers:** “summarize” distances to nets in own area, advertise to other Area Border routers.
- **backbone routers:** run OSPF routing limited to backbone.
- **boundary routers:** connect to other AS's.

Layer 3 - Inter-AS routing: BGP

- BGP (Border Gateway Protocol): the de facto standard
- allows subnet to advertise its existence to rest of Internet: “I am here”


Layer 3 - BGP basics

- pairs of routers (BGP peers) exchange routing info over semi-permanent TCP connections: **BGP sessions**
 - BGP sessions need not correspond to physical links.
- when AS2 advertises a prefix to AS1:
 - AS2 *promises* it will forward datagrams towards that prefix.
 - AS2 can aggregate prefixes in its advertisement

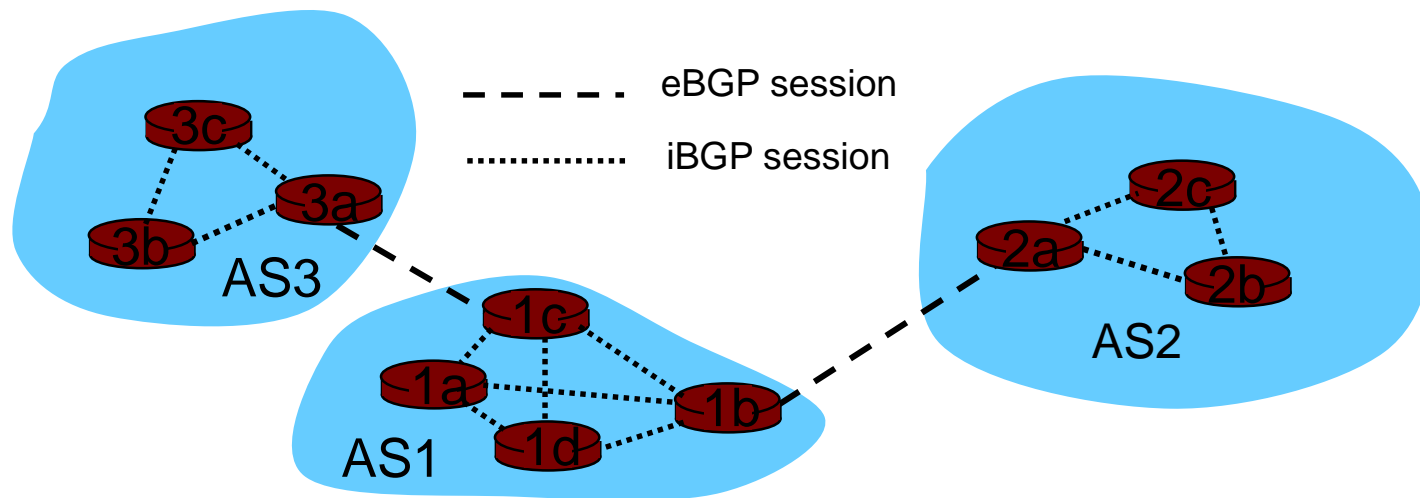

Layer 3 – BGP Reachability

- using eBGP session between 3a and 1c, AS3 sends prefix reachability info to AS1.
 - 1c can then use iBGP do distribute new prefix info to all routers in AS1
 - 1b can then re-advertise new reachability info to AS2 over 1b-to-2a eBGP session
- when router learns of new prefix, it creates entry for prefix in its forwarding table.

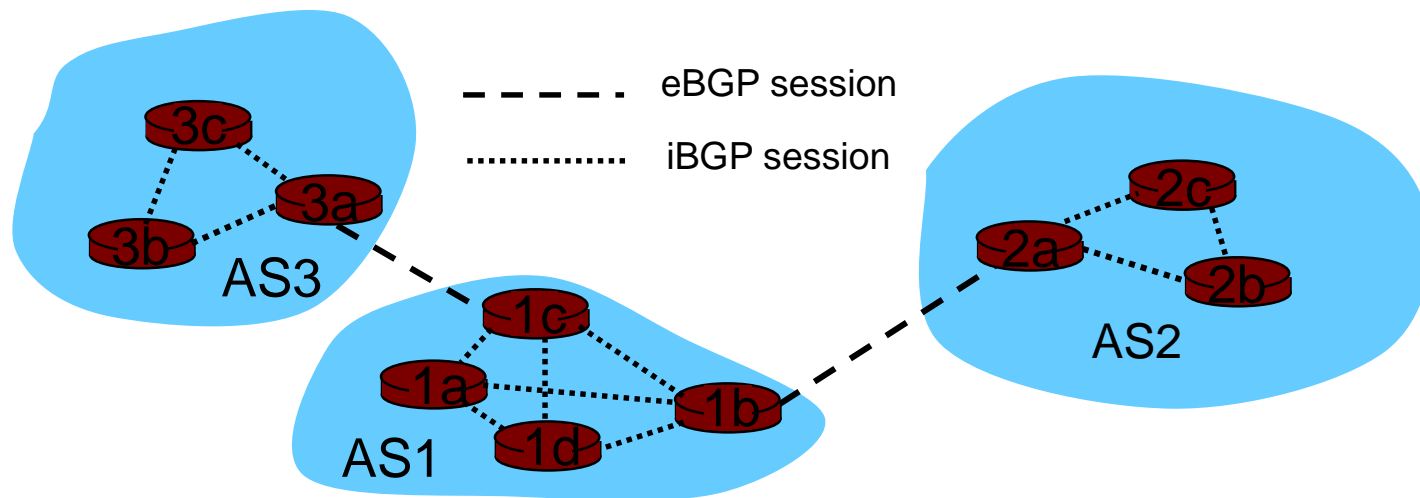



Layer 3 – BGP Paths and Routes

- advertised prefix includes BGP attributes.
 - prefix + attributes = “route”
- two important attributes:
 - **AS-PATH**: contains ASs through which prefix advertisement has passed: e.g, AS 67, AS 17
 - **NEXT-HOP**: indicates specific internal-AS router to next-hop AS. (may be multiple links from current AS to next-hop-AS)
- when gateway router receives route advertisement, uses **import policy** to accept/decline.

Layer 3 - BGP route selection


- Router may learn about more than 1 route to same prefix:
 - Router must select route
- Elimination rules:
 - Local preference value attribute: policy decision
 - Shortest AS-PATH
 - Closest NEXT-HOP router: hot potato routing
 - Additional criteria

Layer 3 – BGP Policies

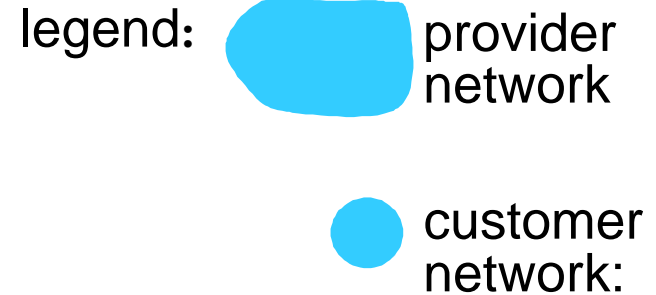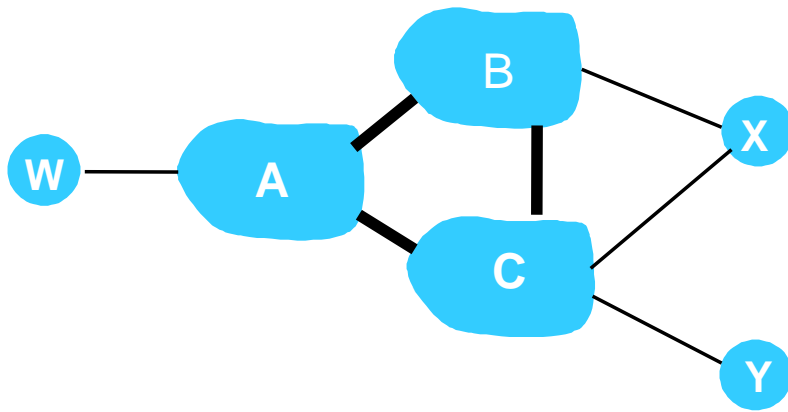

- A,B,C are **provider networks**
- X,W,Y are **customer networks**
- X is **dual-homed**: attached to two networks
 - X does not want to route from B via X to C
 - .. so X will not advertise to B a route to C

Layer 3 – BGP Policies

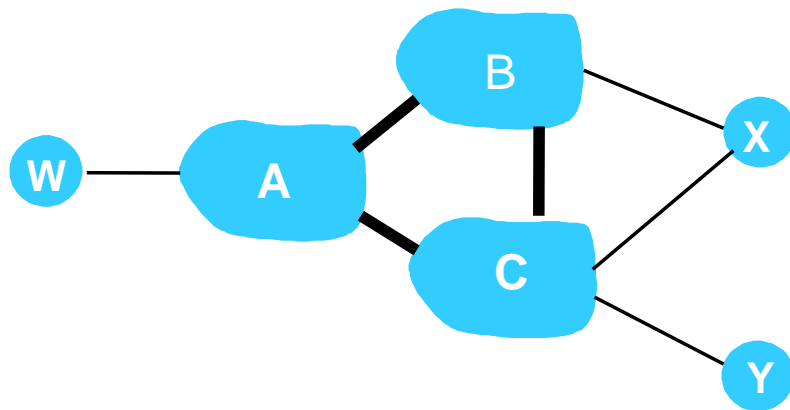


legend:  provider network

 customer network:

- A advertises path AW to B
- B advertises path BAW to X
- Should B advertise path BAW to C?
 - No way! B gets no “revenue” for routing CBAW since neither W nor C are B’s customers
 - B wants to force C to route to w via A
 - B wants to route *only* to/from its customers!

Layer 4 – Principles

- Provide logical communication between app processes running on different hosts
- Relies on and enhances network layer services
- Analogy: Network = postal service, Transport = secretaries at sender and receiver

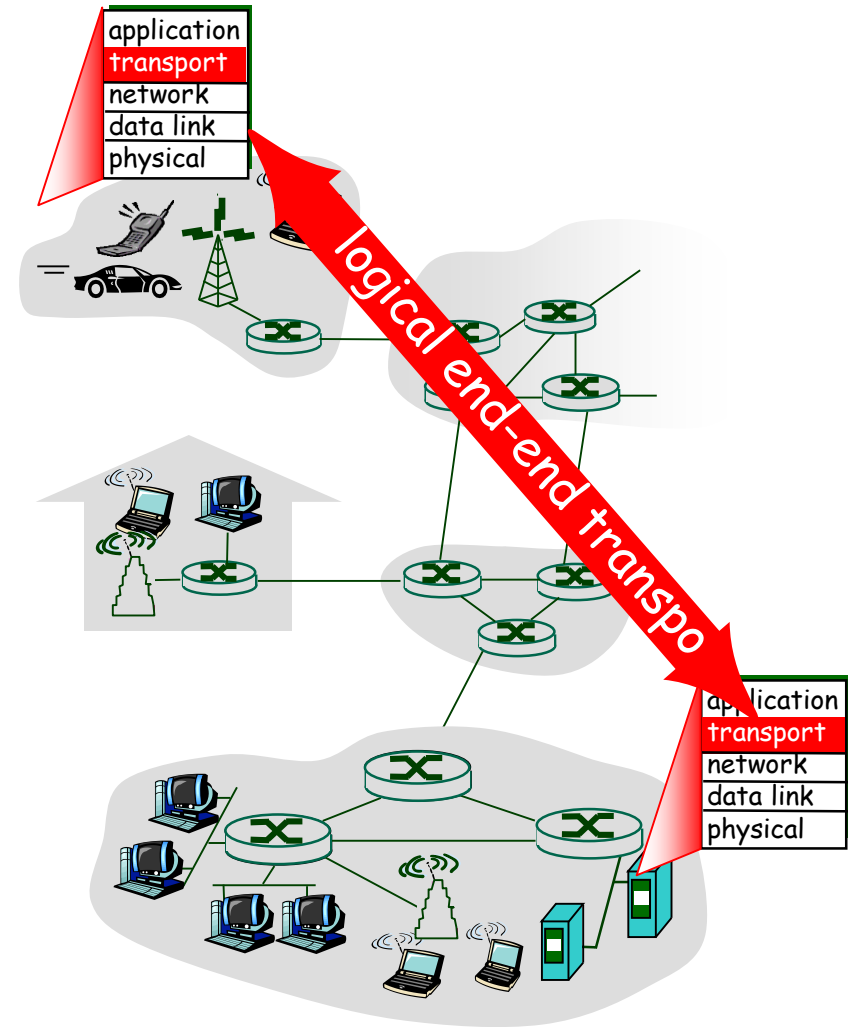

Layer 4 – UDP and TCP

- UDP provides unreliable, unordered delivery
 - Conceptually minimal transport layer protocol with „best-effort“ IP
- TCP provides
 - Reliable data transfer
 - In-order delivery
 - Congestion control
 - Flow control
 - Connection setup
- Both protocols do not guarantee certain delays or bandwidths

Layer 4 – UDP and TCP

- UDP is minimalistic, therefore
 - Used in time-critical applications (Voice over IP)
 - Used when loss or out-of-order delivery is not critical
 - When the concept of connection is not of high relevance
- TCP ensures reliable data transfer:
 - Used when correctness is important
 - Typically used in all long-term non voice/video connections such as file transfers

Layer 4 – Addressing

- TCP socket is identified by 4-tuple:
 - Source IP address
 - Source port number
 - Destination IP address
 - Destination port number
- This allows multiple apps to communicate simultaneously with same source and destination host but, for example, different source port

Layer 4 – Data Transfer

- Reliable data transfer (TCP only) is ensured by
 - Maintaining state for each packet or group of packets (timeout timers)
 - Resend upon loss
 - Loss is inferred by missing Acknowledgments
 - Only send new packets if previous ones got acked
- Speeding things up: Pipelining
 - Idea: Maintain a large group of packets „on the fly“ using a window. Examples: Go-back-N, Selective Repeat

Layer 4 – TCP Properties

- Point-to-Point - one sender, one receiver
- Reliable, in-order delivery
- Pipelined – TCP congestion and flow control sets window sizes
- Send & receive buffers
- Full-duplex data transfer
- Connection oriented
- Flow-Control – Sender prevents to overwhelm receiver

Application Layer

- Applications and application layer protocols:
 - HTTP/HTTPS for Web-Access
 - SMTP for e-mail
 - FTP/SFTP for data transfer
 - Many more...
- Challenge:
 - Utilize social information, peer-to-peer services, intelligent data storage and services (cloud) etc. to optimize content delivery!

Outlook

- In the next lectures:
 - Excuse to wireless networks, then:
 - What are problems with the traditional networking techniques
 - What can be done to alleviate these problems?