

# Exercise 2

Narisu Tao

[narisu.tao@informatik.uni-goettingen.de](mailto:narisu.tao@informatik.uni-goettingen.de)

# CRC checksums

Please calculate the CRC  $R$  of

$$D = 0101\ 1100\ 1010\ 0111\ 1110\ 1111.$$

Use the 4 bit generator


$$G = 1101.$$

*Note:*

*$R$  is always of length  $|G|-1$*

# CRC Checksums

just lines to help:  
do not lose the  
correct column!

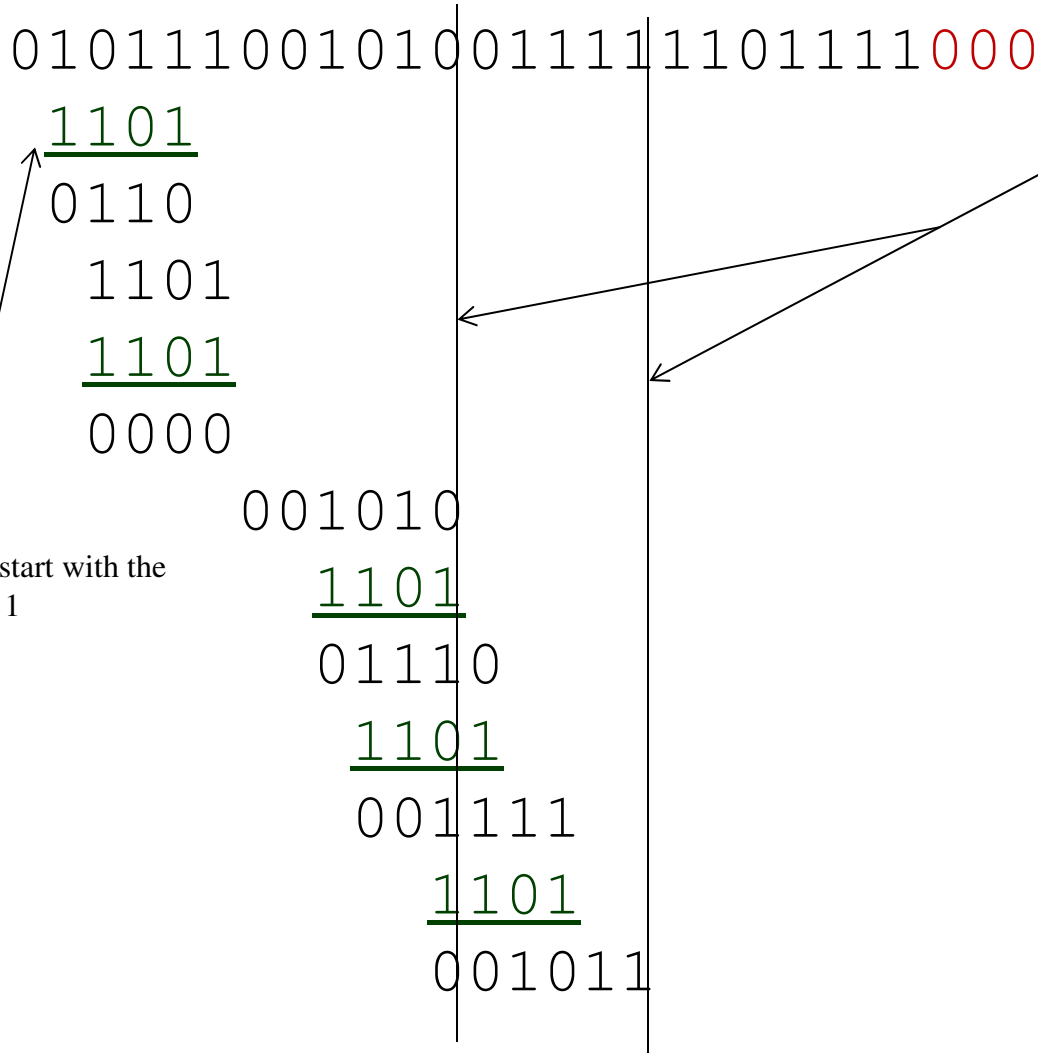

always start with the  
leading 1

# CRC Checksums

```

0101110010100111111101111000
      1011
      1101
      01101
        1101
        0000
          1011
          1101
          01101
            1101
            00001000
              1101
              0101
  
```

Remainder = CRC = 101

only 3 bits!

# Purpose of the link layer

What is the purpose of the link layer?

# Purpose of the link layer

What is the purpose of the link layer?

Answer:

Hop-to-hop connection in one network  
(NOT between networks)

# ARP and inter-networking

What happens, if you want to connect to a host that is not in your local area network?

# ARP and inter-networking

What happens, if you want to connect to a host that is not in your local area network?


Answer:

Remember: ARP is layer 2, routers are layer 3.  
Inter-networking is the job of the network layer.

ARP is serving in looking up the MAC of the router that connects to the network of the destination node.



- 1.A creates IP datagram with source A, destination B
- 2.A uses ARP to get R's MAC address for 111.111.111.110
- 3.A creates link-layer frame with R's MAC address as dest, frame contains A-to-B IP datagram
- 4.A's NIC sends frame
- 5.R's NIC receives frame
- 6.R removes IP datagram from Ethernet frame, sees destination B
- 7.R uses ARP to get B's MAC address
- 8.R creates frame containing A-to-B IP datagram sends to B

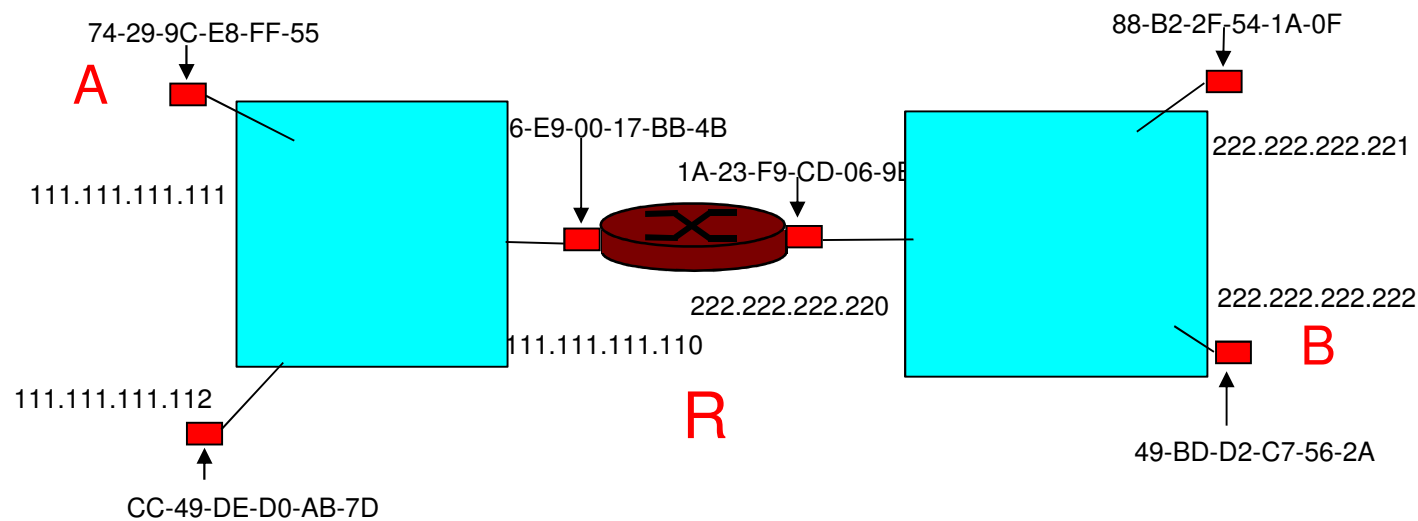

# MAC and IP addresses

Please name a conceptual difference between MAC and IP addresses

# MAC and IP addresses

Please name a conceptual difference between MAC and IP addresses

Answer:

MAC addresses are unique identifiers for a specific device.

IP addresses for devices may change frequently

# Exponential backoff

Why does Ethernet use exponential backoff for collision detection?

# Exponential backoff

Why does Ethernet use exponential backoff for collision detection?

Answer:

Exponential backoff is a simple way to quickly resolve a collision and to adapt to varying congestion states.

It does not require additional signalling among nodes.