

# Telematics

## Principles of Computer Networks

Prof. Xiaoming Fu

Assistants: F. Tegeler, N. Neumann and R. Seibel

# Course Overview

- 22 Oct. 2009 Introduction & Layering
- 29 Oct. 2009 Link Layer I
- 5 Nov. 2009 Link Layer II
- 12 Nov. 2009 Network Layer I
- 19 Nov. 2009 Network Layer II; Routing I
- 26 Nov. 2009 Network Layer III; Routing II; Mobility
- 3 Dec. 2009 Transport Layer I
- 10 Dec. 2009 Transport Layer II
- 17 Dec. 2009 Networked Multimedia
- 7 Jan. 2010 Quality of Service
- 14 Jan. 2010 Network Security I
- 21 Jan. 2010 Network Security II
- 28 Jan. 2010 Questions & Answers Session
- 4 Feb. 2010 Written Examination

# Excercises

- Contact e-mail:

[tegeler@cs.uni-goettingen.de](mailto:tegeler@cs.uni-goettingen.de)

- Homework exercises will be handed out regularly after class and are available in StudIP.
- Students are encouraged to work on their own and solve the homework exercises to prepare for the final exam.
- Solutions will be presented one week later after class. Thursdays 12:00 – 13:00 in the lecture room.

# Grading

- The grading is as follows:

100% Final exam!

- All important information (click on Telematics)

[wiki.net.informatik.uni-goettingen.de](http://wiki.net.informatik.uni-goettingen.de)

# Chapter 1


# Introduction

This lecture is based on the book:

Computer Networking: A Top Down Approach  
4<sup>th</sup> edition. Jim Kurose, Keith Ross, Addison-Wesley,  
July 2007.

Alternative textbook:

- A. Tanenbaum, "Computer Networks", 4th edition, Prentice Hall, 2002
- D. Comer, "Computer Networks and Internets", 4th edition, Prentice Hall, 2002

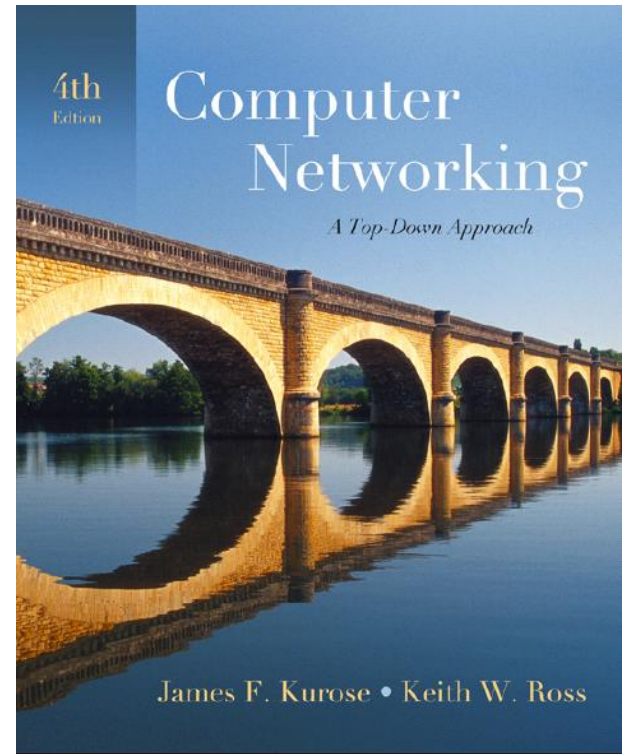

# Chapter 1: roadmap

## 1.1 *What is the Internet?*

## 1.2 Network edge

- end systems, access networks, links

## 1.3 Network core

- circuit switching, packet switching, network structure

## 1.4 Delay, loss and throughput in packet-switched networks

## 1.5 Protocol layers, service models

## 1.6 History


# “Cool” internet appliances



IP picture frame  
<http://www.ceiva.com/>



Web-enabled toaster +  
weather forecaster

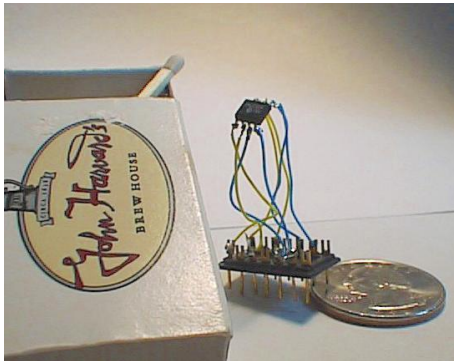


World's smallest web server  
<http://www-ccs.cs.umass.edu/~shri/iPic.html>



Internet phones

# What's the internet? A close look...


- millions of connected computing devices: *hosts, end-systems*
  - PCs, workstations, servers
  - PDAs, phones, toasters
  - running *network apps*
- *communication links*
  - fiber, copper, coax, radio, satellite
  - transmission rate = ***bandwidth***
- *routers*: forward packets (chunks of data)

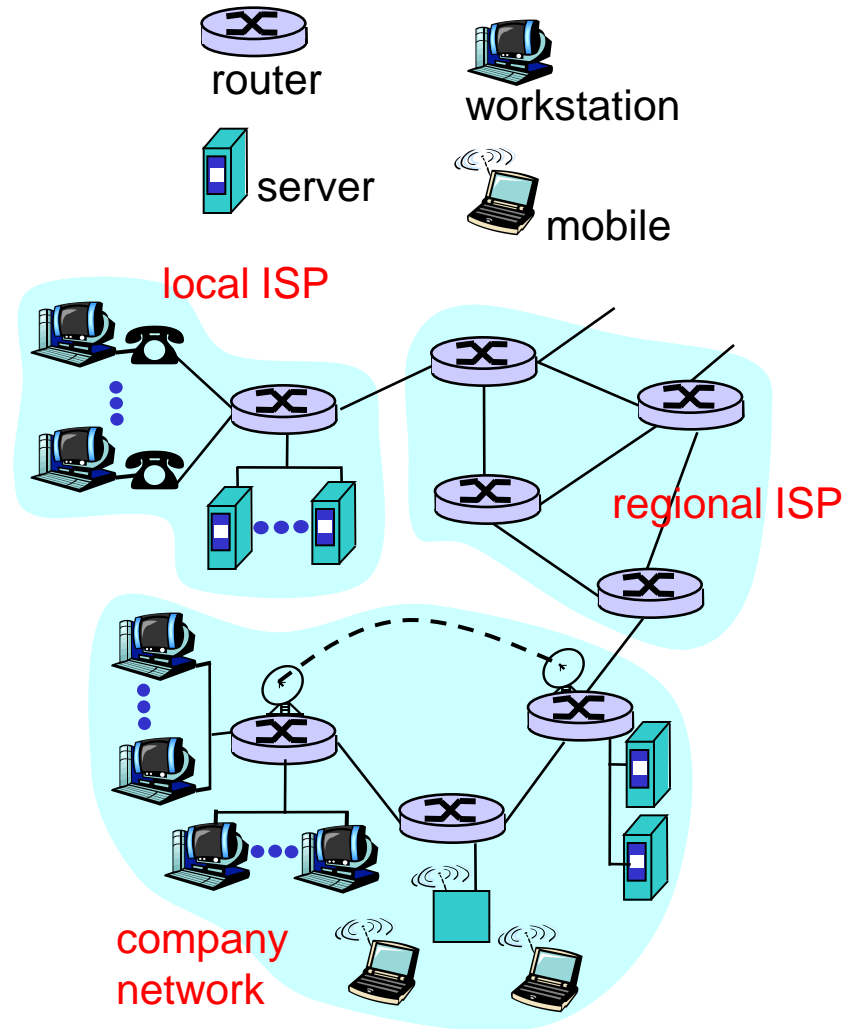



# What's the internet? ... and closer

- *protocols* define format, order of msgs sent and received among network entities, and actions taken on msg transmission, receipt
- *Internet*: “network of networks”
  - loosely hierarchical
  - public Internet versus private intranet
- *Internet standards*
  - RFC: Request for Comments
  - IETF: Internet Engineering Task Force

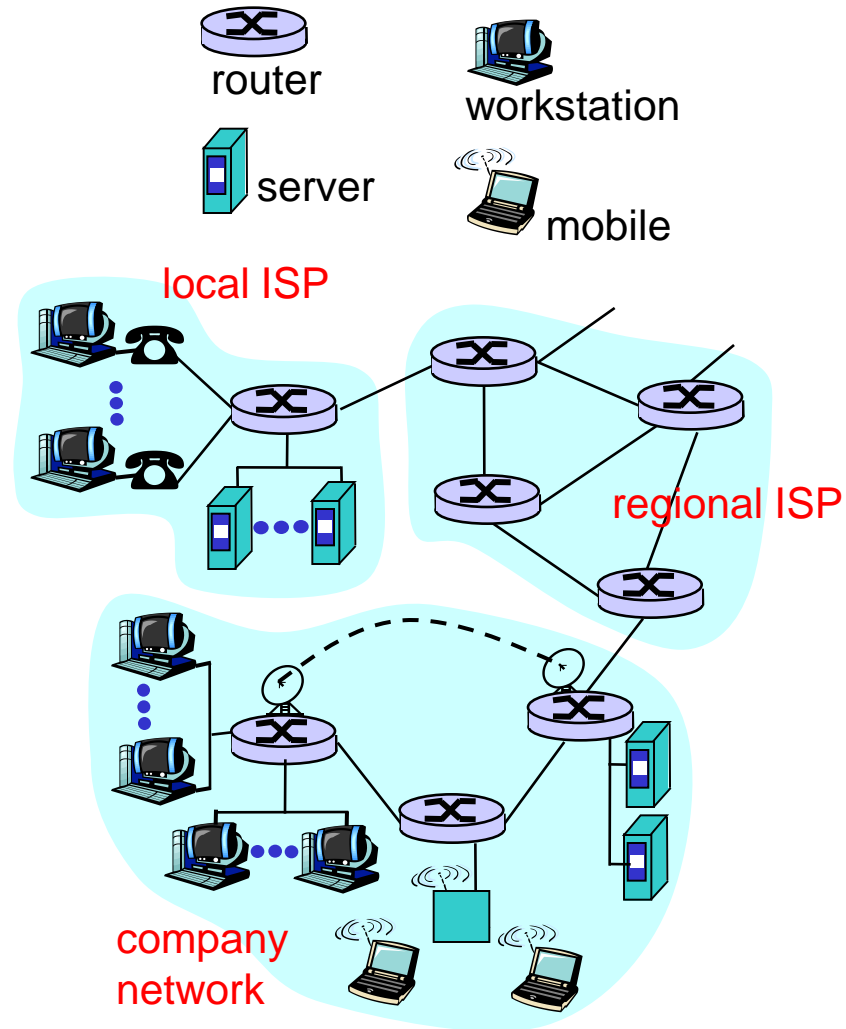

# What's a protocol?

## human protocols:

- “what’s the time?”
  - “I have a question”
  - introductions
- ... specific msgs sent
- ... specific actions taken when msgs received, or other events


## network protocols:

- machines rather than humans
- all communication activity in Internet governed by protocols

*protocols define format, order of msgs sent and received among network entities, and actions taken on msg transmission, receipt*

# What's a protocol?

a human protocol and a computer network protocol:

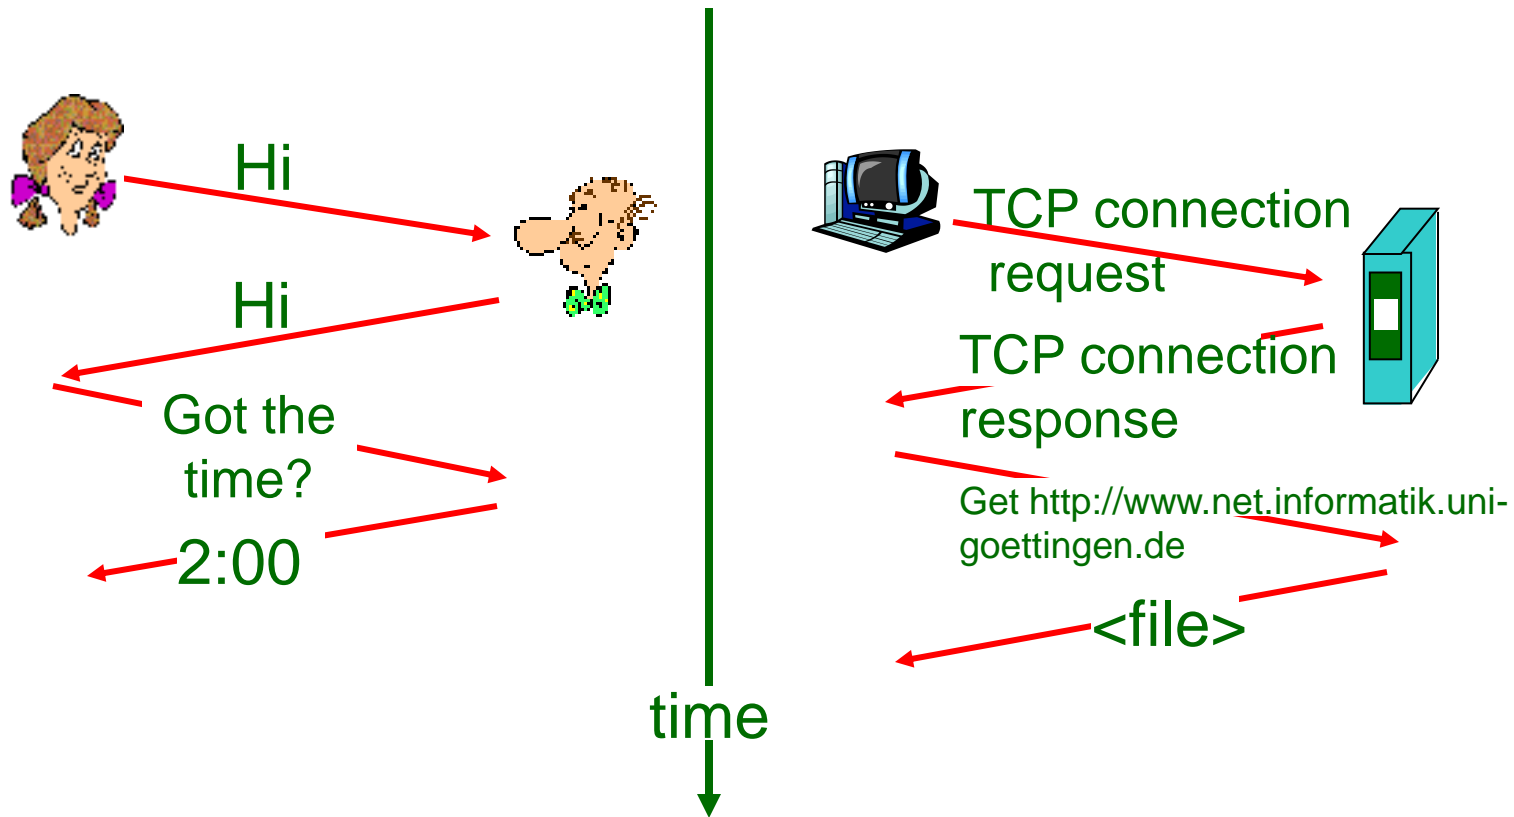

# Chapter 1: roadmap

1.1 What *is* the Internet?

1.2 Network edge

- end systems, access networks, links

1.3 Network core

- circuit switching, packet switching, network structure


1.4 Delay, loss and throughput in packet-switched networks

1.5 Protocol layers, service models

1.6 History


# A closer look at network structure:

- **network edge:**  
applications and hosts
- **access networks, physical media:**  
wired, wireless communication links
- **network core:**
  - interconnected routers
  - network of networks

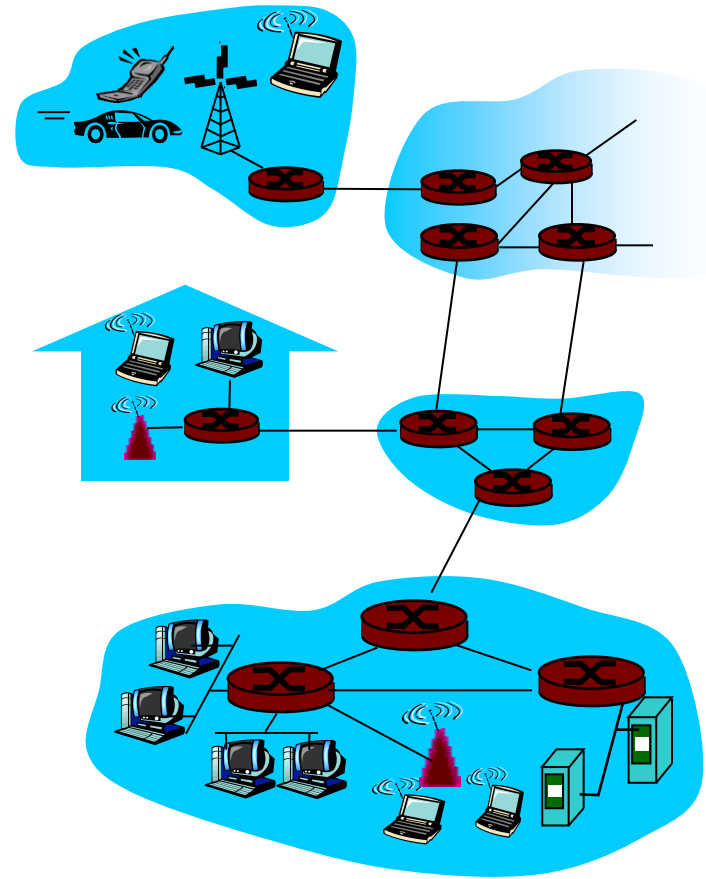

# The network edge:

- **end systems (hosts):**
  - run application programs
  - e.g. web, email
  - at “edge of network”
- **client/server model**
  - client host requests, receives service from always-on server
  - e.g. web browser/server; email client/server
- **peer-peer model:**
  - minimal (or no) use of dedicated servers
  - e.g. Skype, BitTorrent

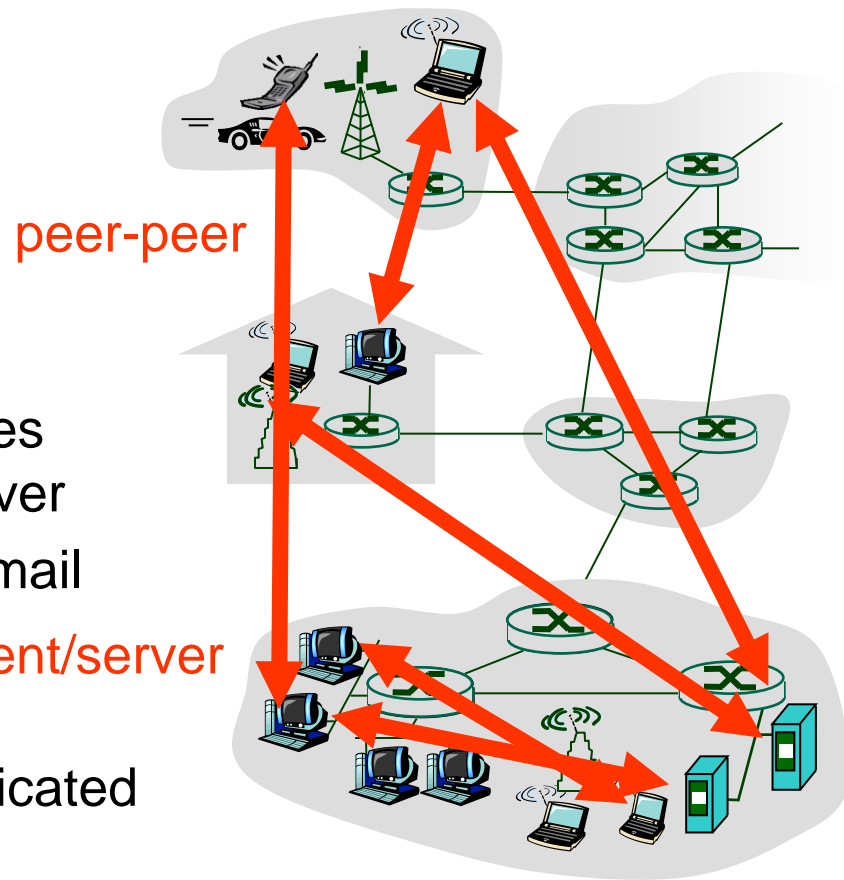


# Access networks and physical media

*Q: How to connect end systems to edge router?*

- residential access nets
- institutional access networks (school, company)
- mobile access networks



*Keep in mind:*

- bandwidth (bits per second) of access network?
- shared or dedicated?

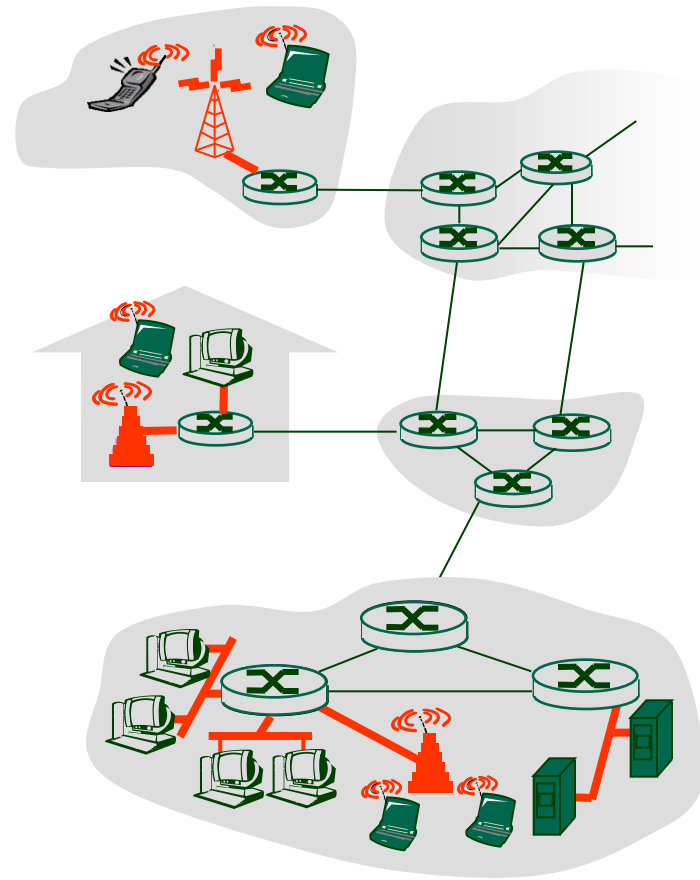

# Example: Company access: local area networks

- company/univ **local area network** (LAN) connects end system to edge router (example: our GöNet)
- **Ethernet:**
  - 10 Mbs, 100Mbps, 1Gbps, 10Gbps Ethernet
  - modern configuration: end systems connect into *Ethernet switch*
- LANs: will be discussed in detail throughout this lecture

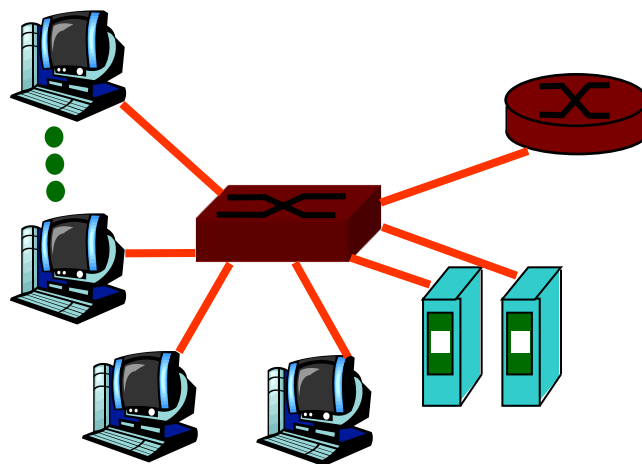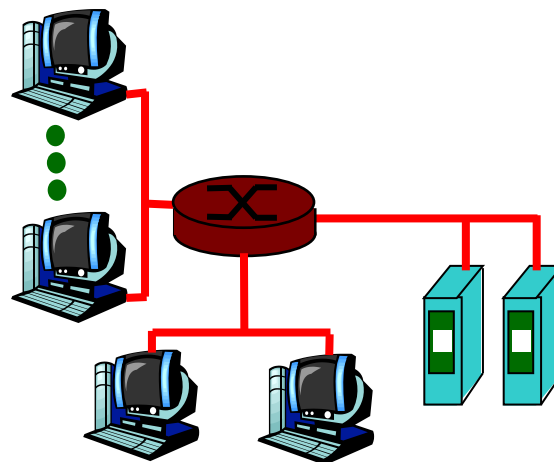




# Example: Home networks

## Typical home network components:

- DSL or cable modem
  - router/firewall/NAT
  - Ethernet
  - wireless access point
- point

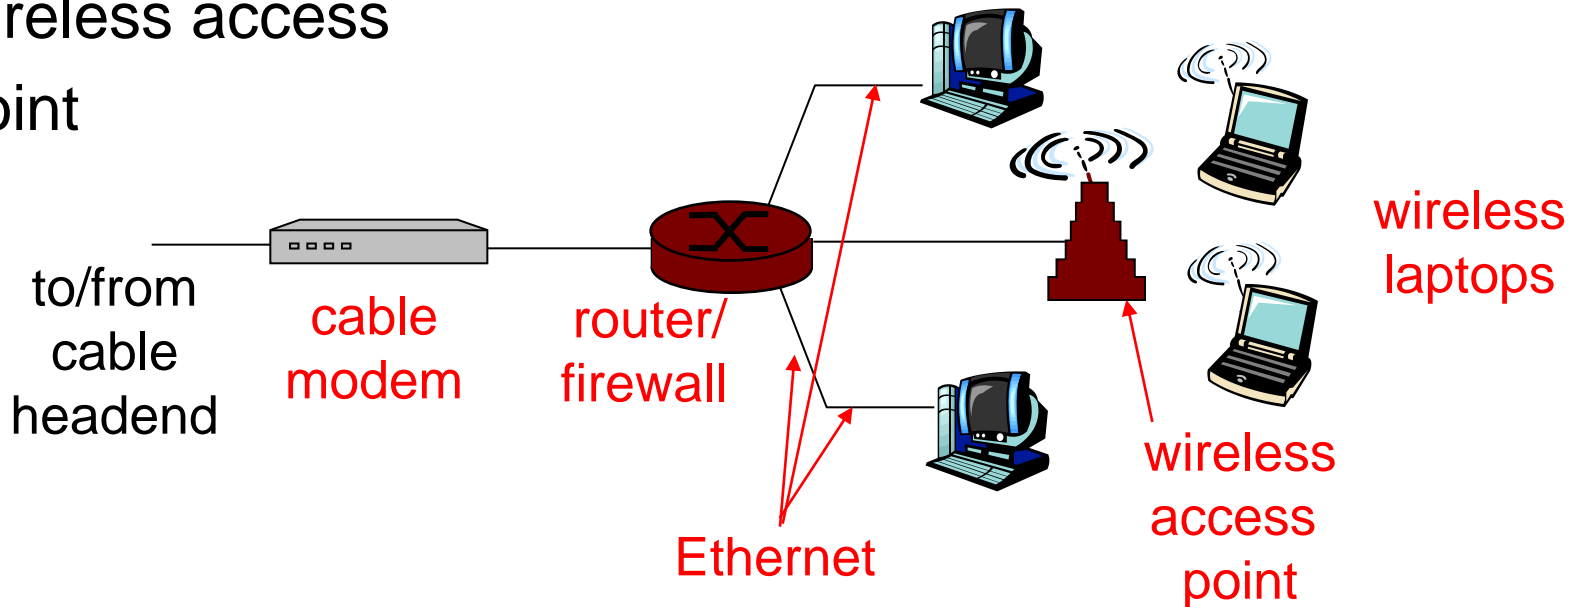

# Chapter 1: roadmap

1.1 What *is* the Internet?

1.2 Network edge

- end systems, access networks, links

1.3 Network core

- circuit switching, packet switching, network structure


1.4 Delay, loss and throughput in packet-switched networks

1.5 Protocol layers, service models

1.6 History

# The Network Core


- mesh of interconnected routers
- ***the fundamental question:*** how is data transferred through net?
  - **circuit switching:** dedicated circuit per call: telephone network
  - **packet-switching:** data sent through a network in discrete “chunks”

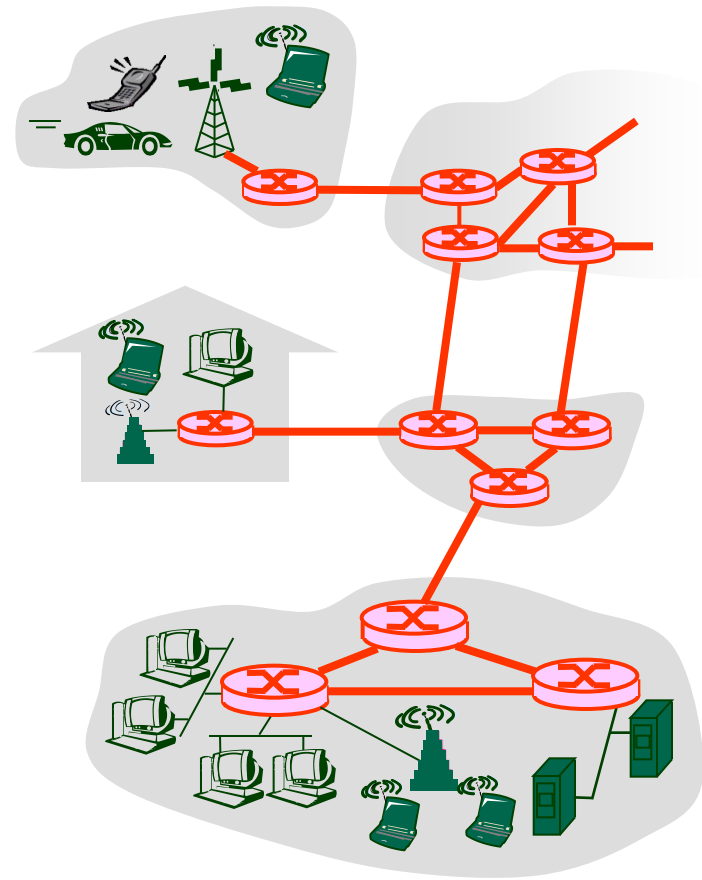

# Network Core: Circuit Switching

## End-end resources reserved for “call”

- link bandwidth, switch capacity
- **dedicated resources:** no sharing
- circuit-like (guaranteed) performance
- call setup required

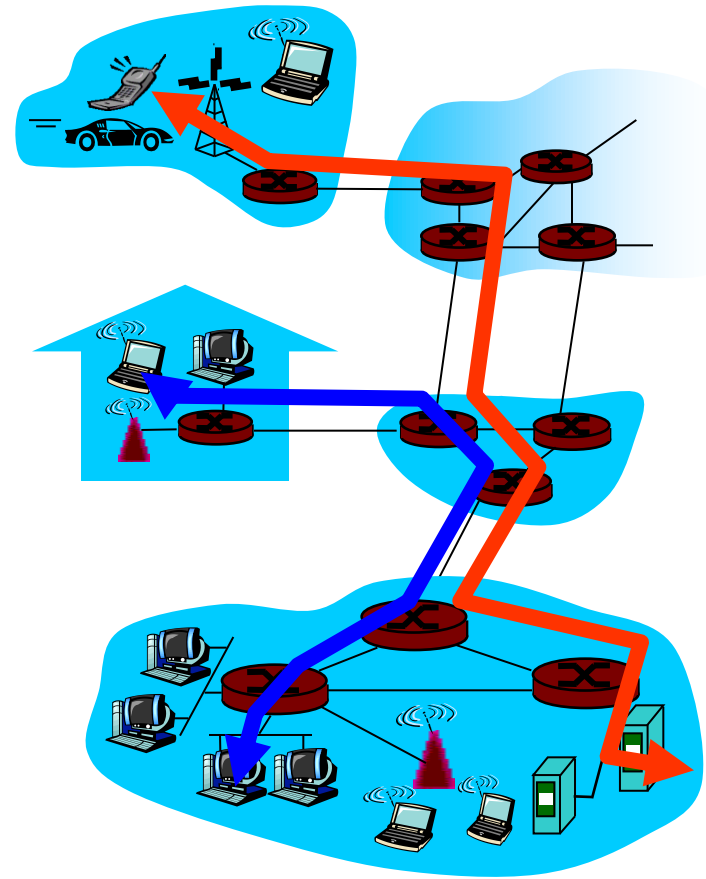

# Network Core: Circuit Switching


- network resources (e.g., bandwidth) **divided into “pieces”**
- pieces allocated to calls
  - resource piece *idle* if not used by owning call (*no sharing*)
  - dividing link bandwidth into “pieces”
    - frequency division
    - time division

# Circuit Switching: FDM and TDM


FDM

Example:

4 users

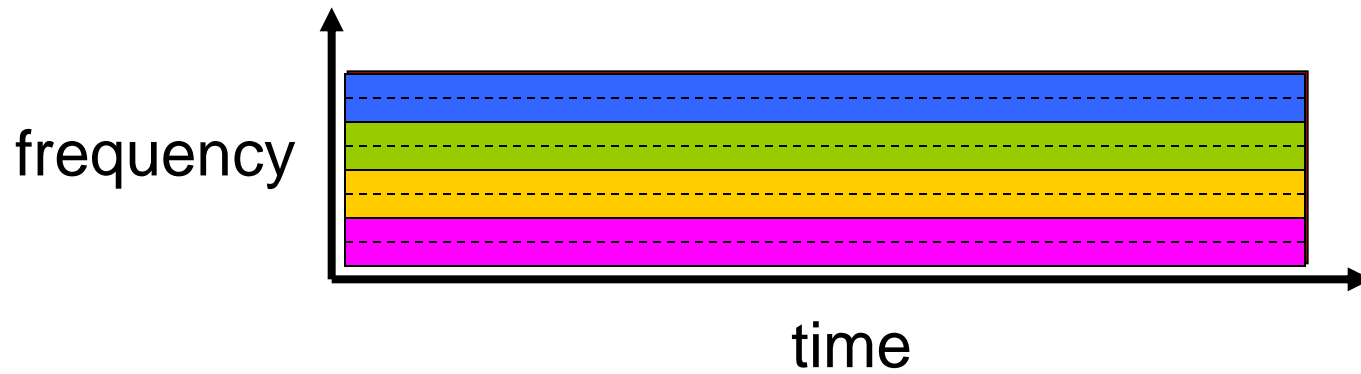

TDM

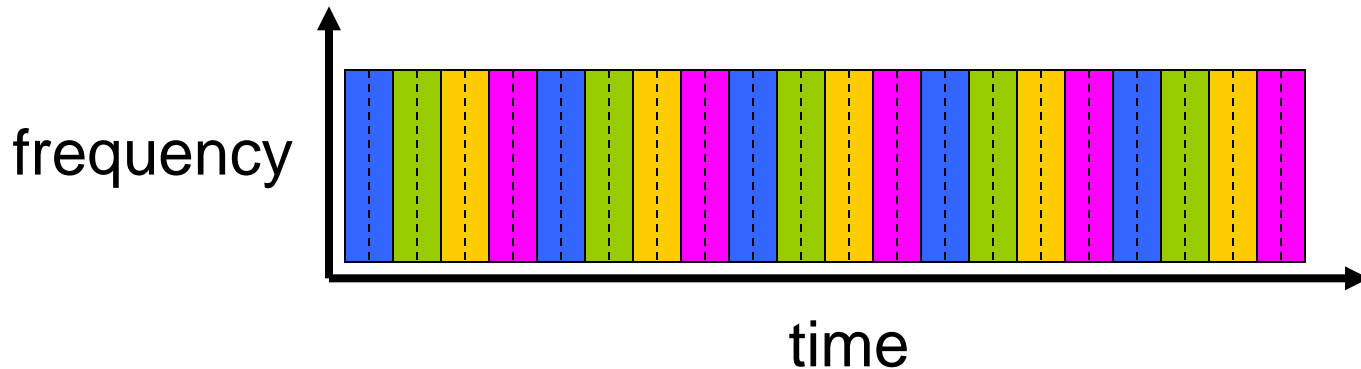

# Network Core: Packet Switching

each end-end data stream  
divided into *packets*

- user A, B packets *share* network resources
  - Sequence of sending packets does not have fixed pattern → **statistical multiplexing**
- each packet uses full link bandwidth
- resources used *as needed*

resource contention:


- aggregate resource demand can exceed amount available
- congestion: packets queue, wait for link use
- store and forward: packets move one hop at a time
  - Node receives complete packet before forwarding

Bandwidth division into “pieces”

Dedicated allocation

Resource reservation

# Packet Switching: Statistical Multiplexing

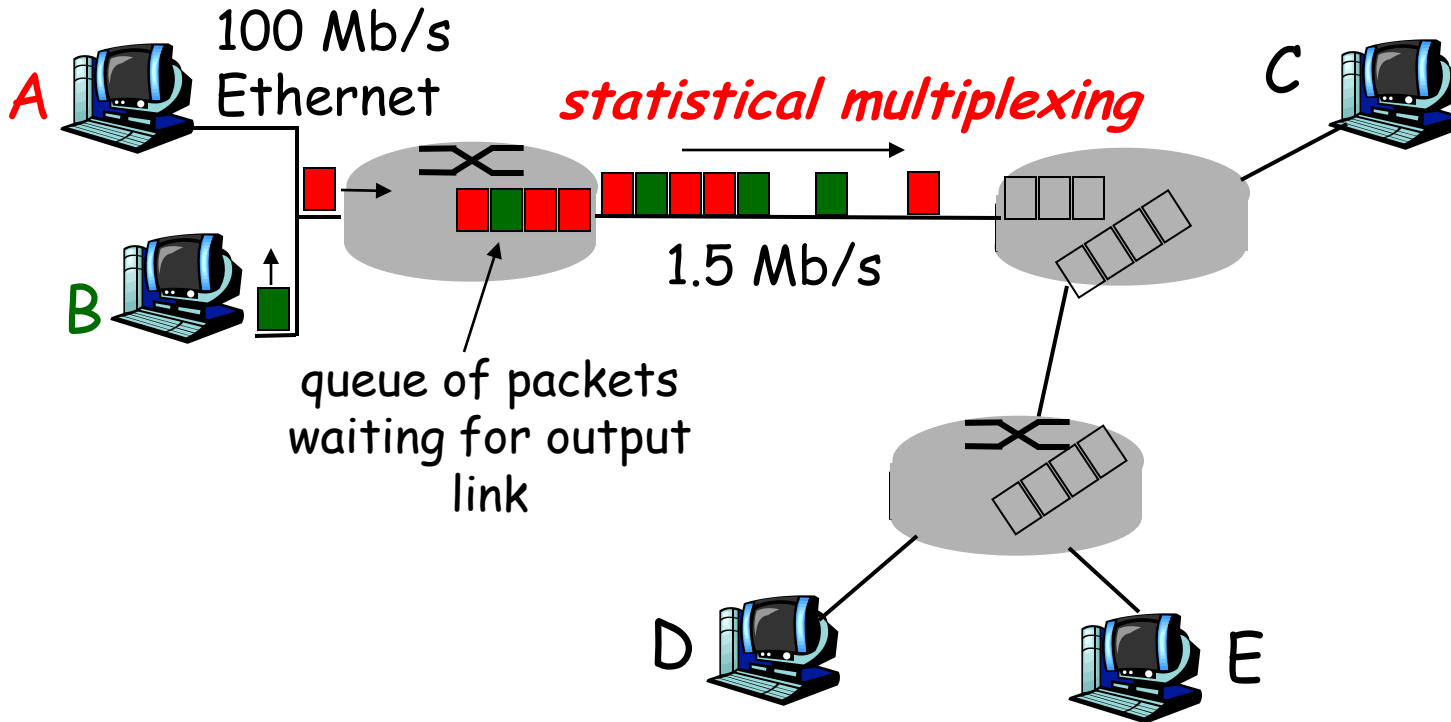


Sequence of A & B packets does not have fixed pattern,  
bandwidth shared on demand → **statistical multiplexing**.

TDM: each host gets same slot in revolving TDM frame.



# Packet-switching: store-and-forward



- takes  $L/R$  seconds to transmit (push out) packet of  $L$  bits on to link at  $R$  bps
- **store and forward**: entire packet must arrive at router before it can be transmitted on next link
- **delay** =  $3L/R$  (assuming zero propagation delay)

## Example:

- $L = 7.5$  Mbits
- $R = 1.5$  Mbps
- transmission delay = 15 sec

## Note:


- In order to be more efficient, large packets are usually segmented into smaller packets

→ *Can you explain why?*

# Packet switching versus circuit switching

*Packet switching allows more users to use network!*

- 1 Mb/s link
- each user:
  - 100 kb/s when “active”
  - active 10% of time
- *circuit-switching:*
  - 10 users
- *packet switching:*
  - with 35 users, probability > 10 active at same time is less than .0004

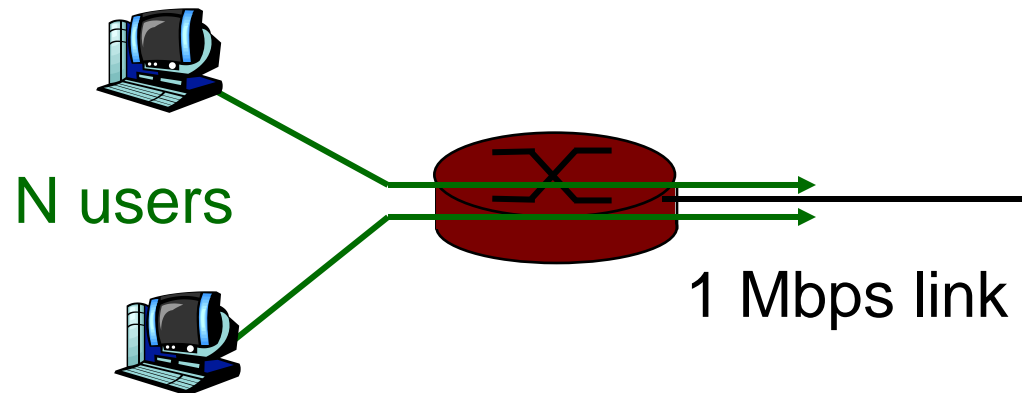

Q: how did we get value 0.0004?


# Packet switching versus circuit switching

Is packet switching better than circuit switching?


- great for bursty data
  - resource sharing
  - simpler, no call setup
- **excessive congestion:** packet delay and loss
  - protocols needed for reliable data transfer, congestion control
- **Q: How to provide circuit-like behavior?**
  - bandwidth guarantees needed for audio/video apps
  - still an unsolved problem

# Internet structure: network of networks

- roughly hierarchical
- **at center: “tier-1” ISPs** (e.g., Verizon, Sprint, AT&T, Cable and Wireless), national/international coverage
  - treat each other as equals

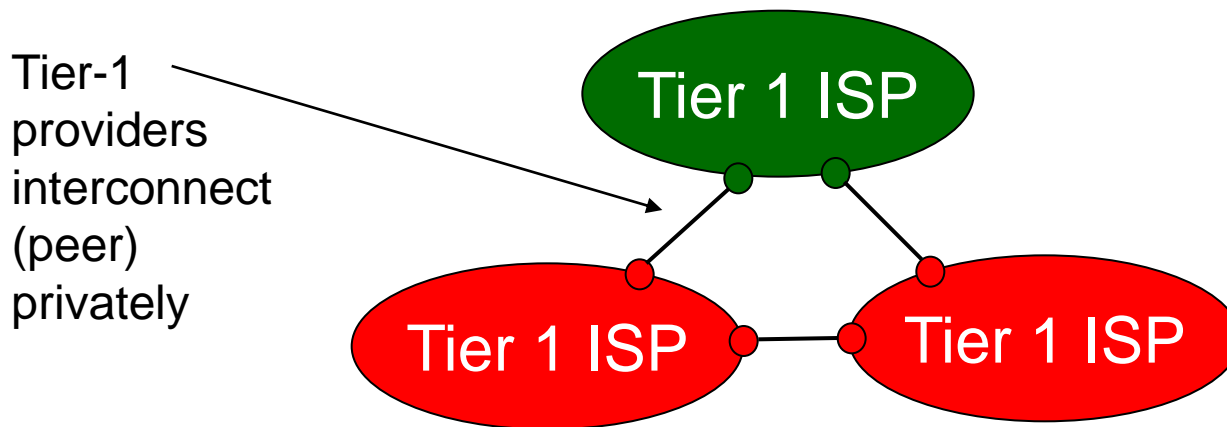


# Tier-1 ISP: e.g., Sprint

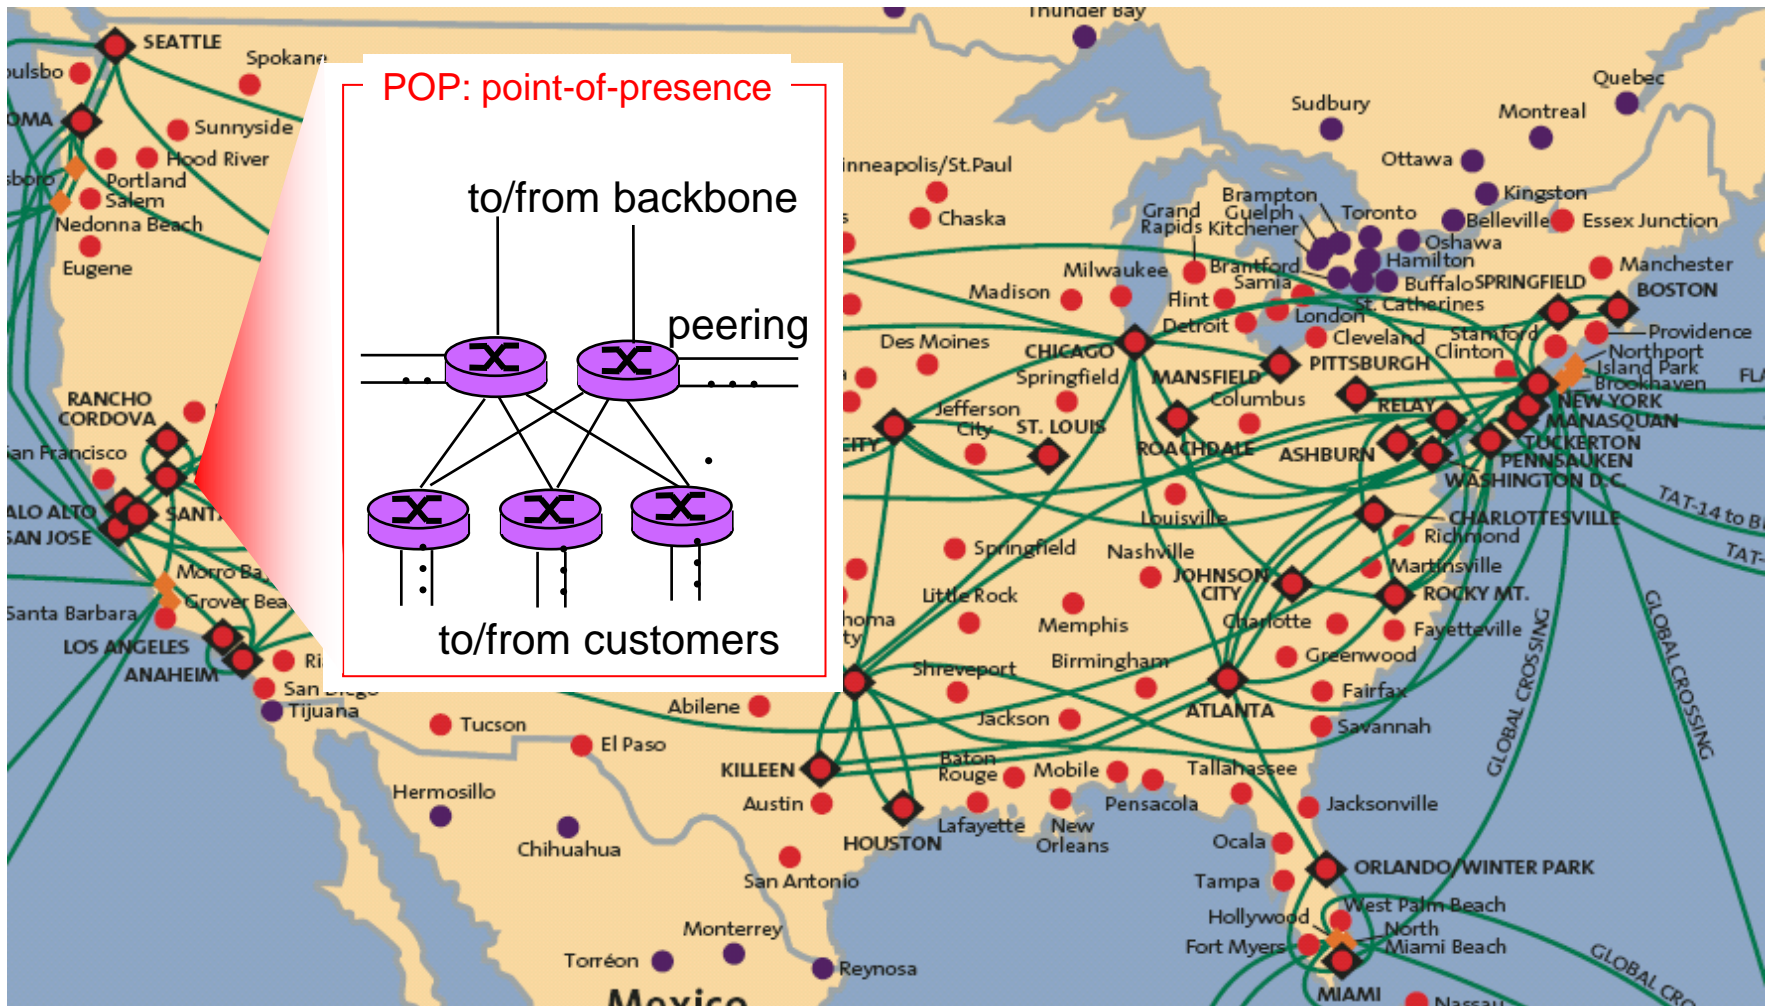

# Internet structure: network of networks


- “Tier-2” ISPs: smaller (often regional) ISPs
  - Connect to one or more tier-1 ISPs, possibly other tier-2 ISPs

Tier-2 ISP pays tier-1 ISP for connectivity to rest of Internet  
□ tier-2 ISP is customer of tier-1 provider

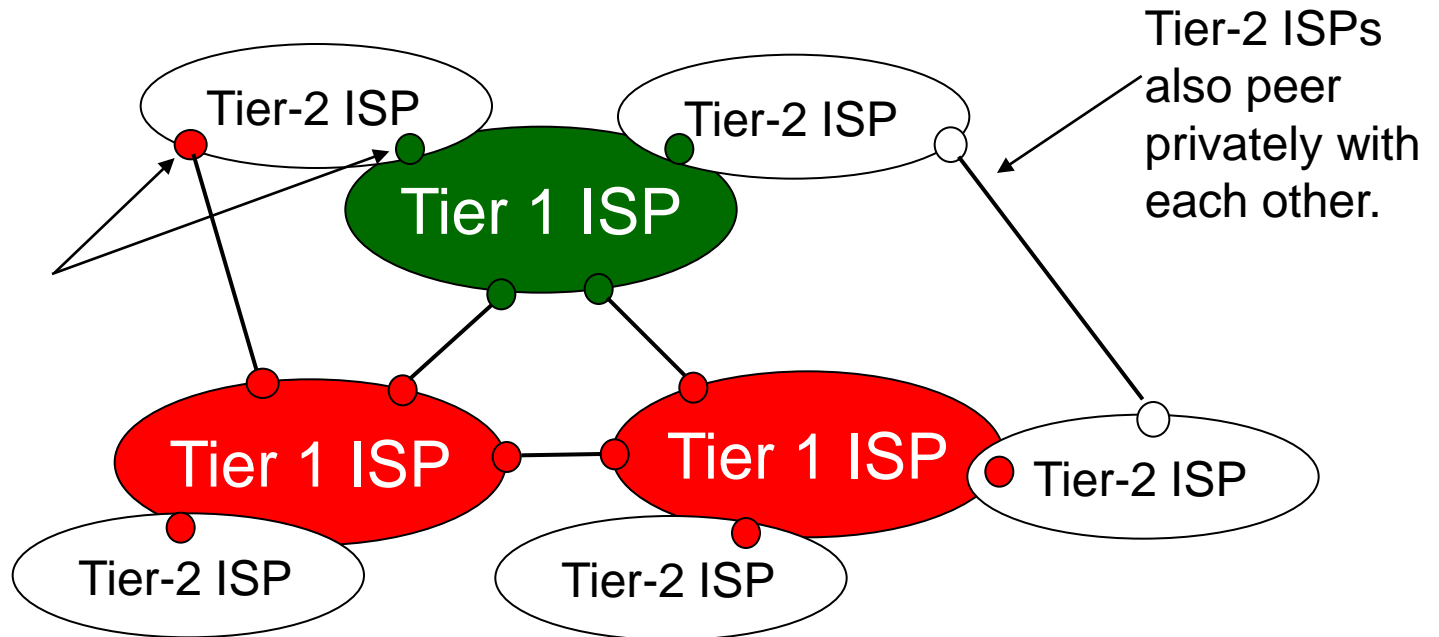


# Internet structure: network of networks

- “Tier-3” ISPs and local ISPs
  - last hop (“access”) network (closest to end systems)

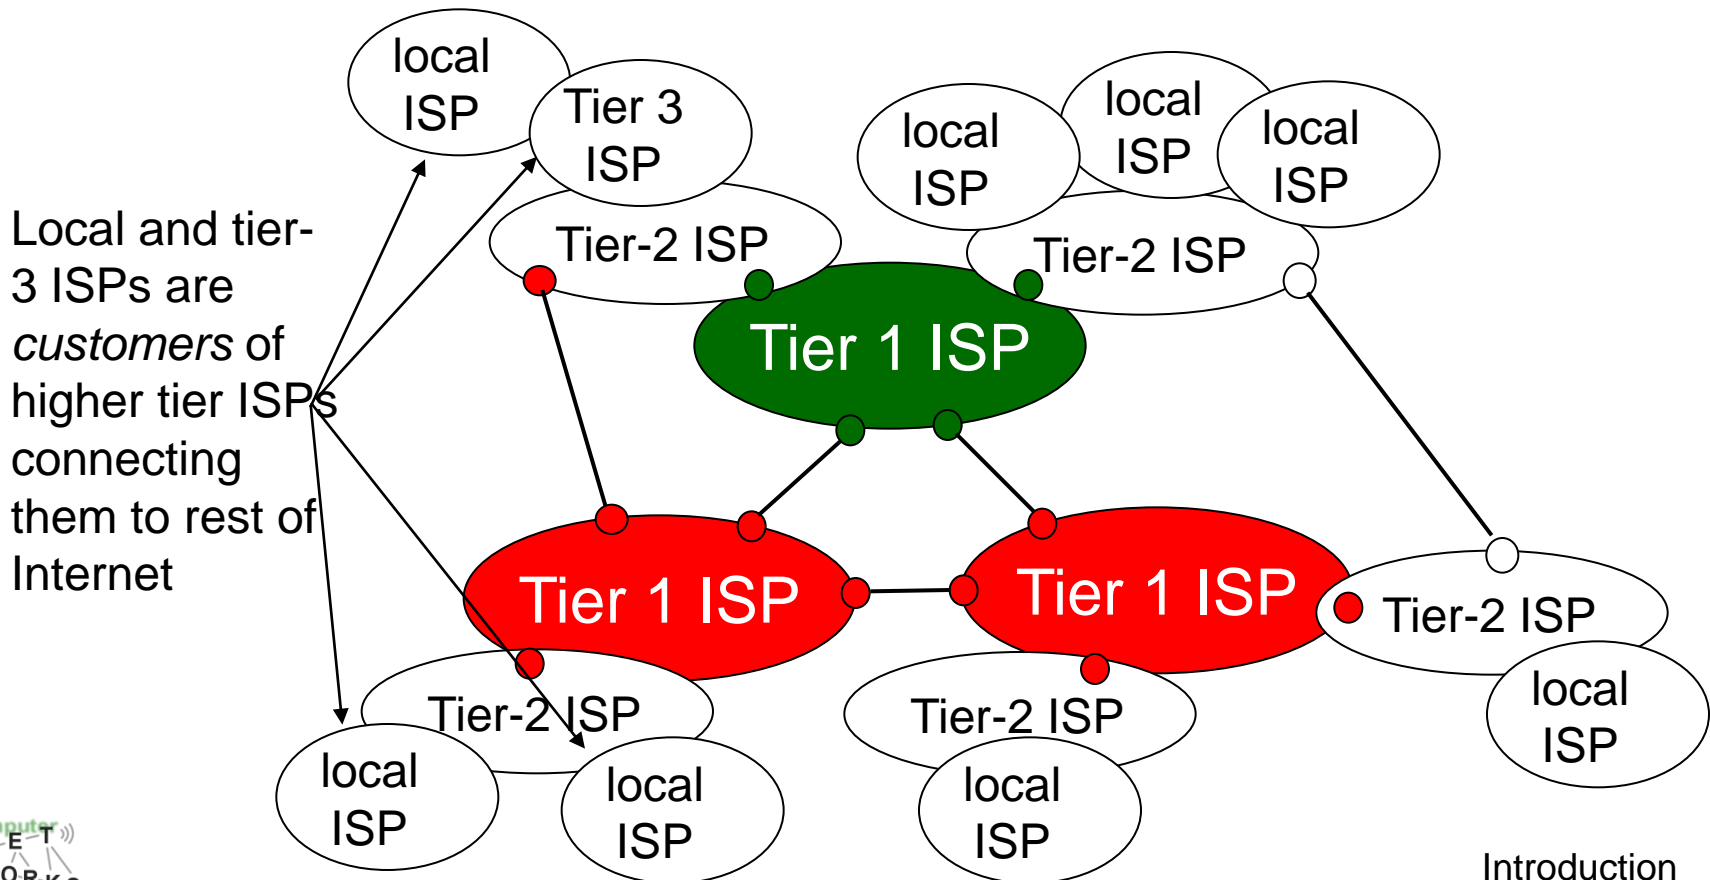

# Internet structure: network of networks

- a packet passes through many networks!

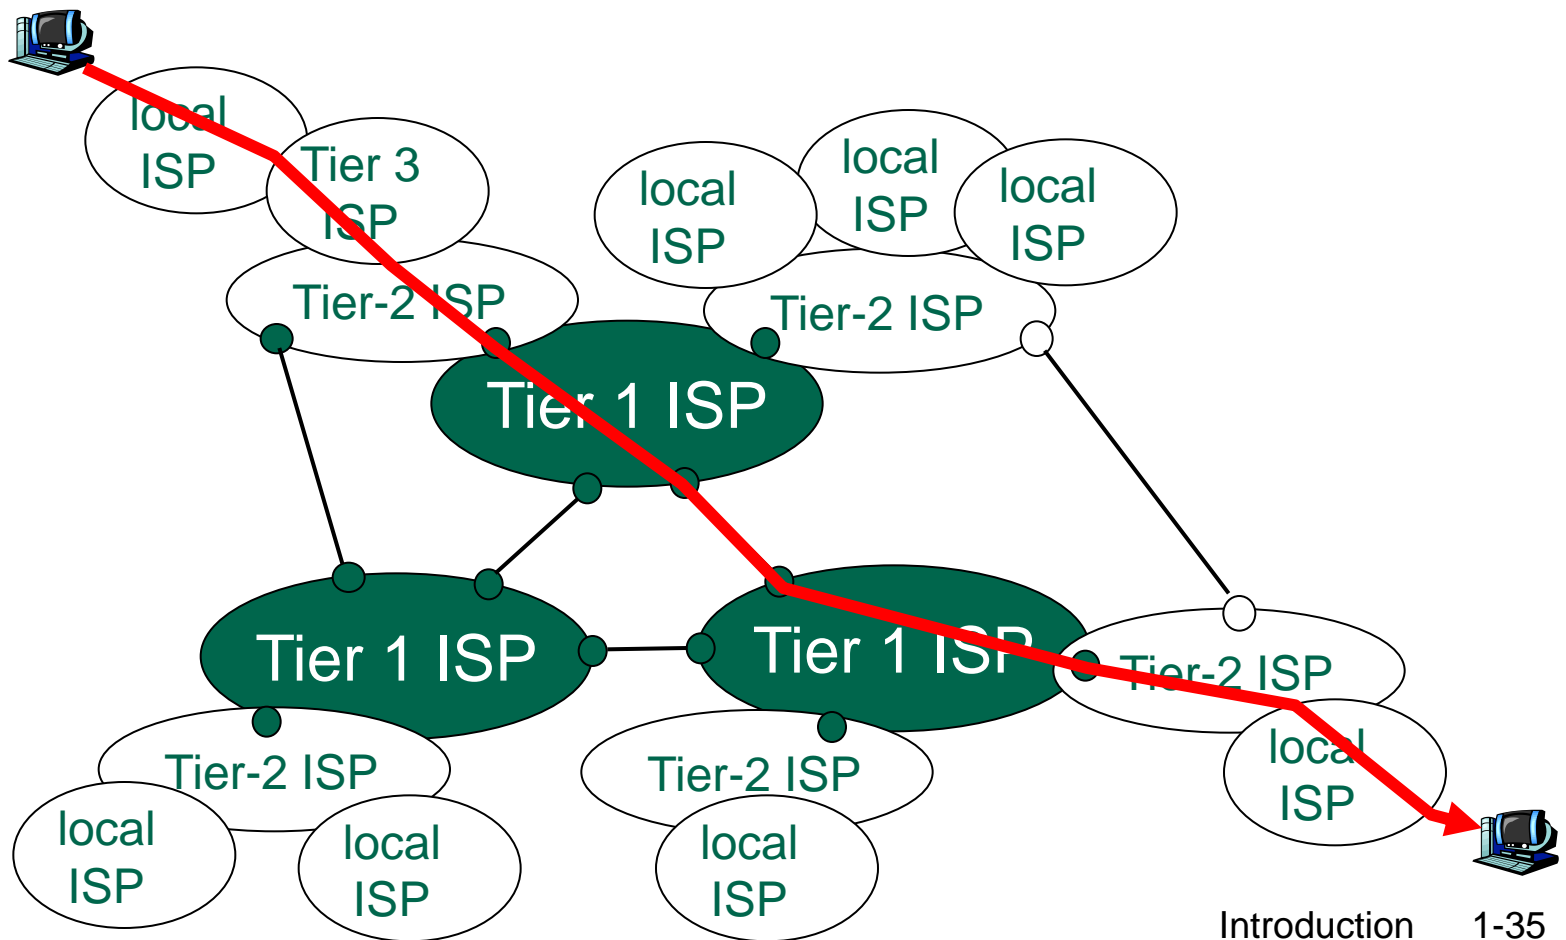



# Chapter 1: roadmap

1.1 What *is* the Internet?

1.2 Network edge

- end systems, access networks, links

1.3 Network core

- circuit switching, packet switching, network structure

1.4 Delay, loss and throughput in packet-switched networks


1.5 Protocol layers, service models

1.6 History

# How do loss and delay occur?

packets *queue* in router buffers

- packet arrival rate to link exceeds output link capacity
- packets queue, wait for turn

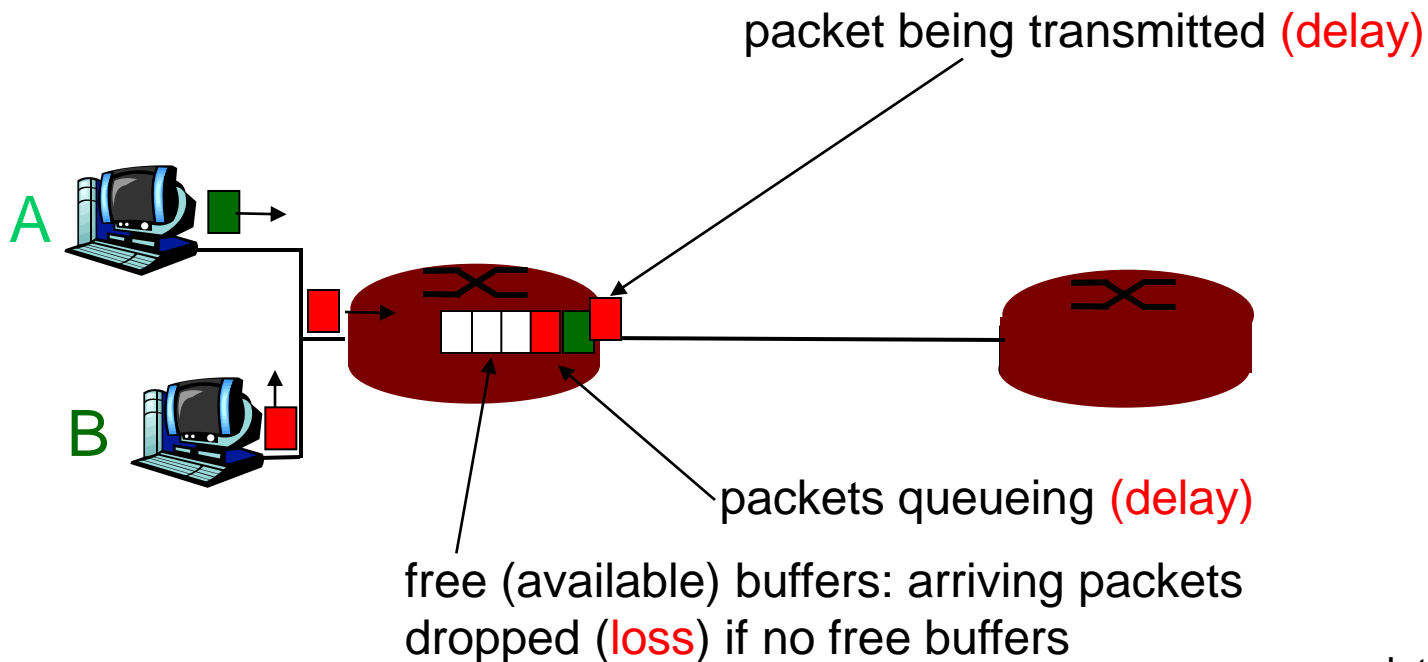


# Four sources of packet delay

- 1. nodal processing:
  - check bit errors
  - determine output link

- 2. queueing

- ❖ time waiting at output link for transmission
- ❖ depends on congestion level of router

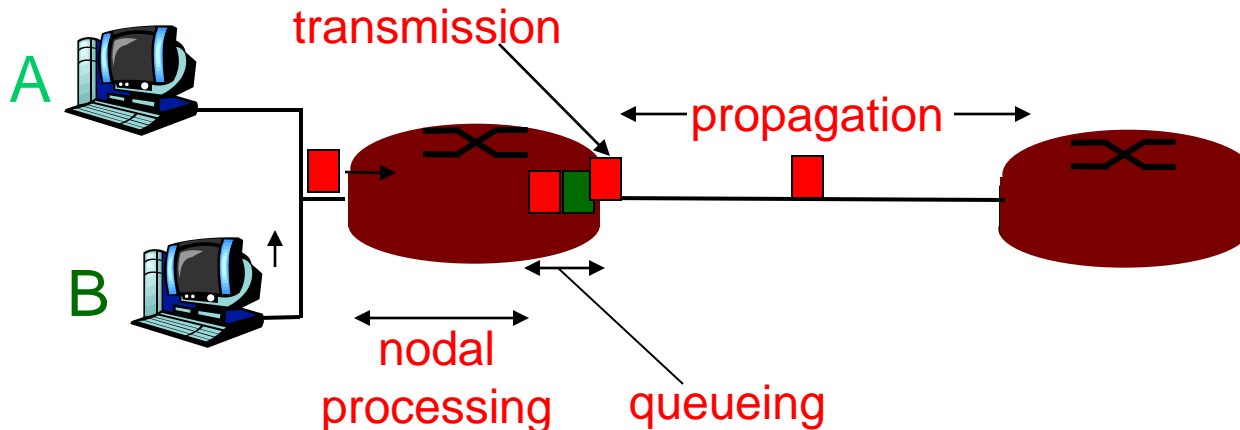

# Delay in packet-switched networks


## 3. Transmission delay:

- $R$  = link bandwidth (bps)
- $L$  = packet length (bits)
- time to send bits into link =  $L/R$

## 4. Propagation delay:


- $d$  = length of physical link
- $s$  = propagation speed in medium ( $\sim 2 \times 10^8$  m/sec)
- propagation delay =  $d/s$

**Note:**  $s$  and  $R$  are very different quantities!

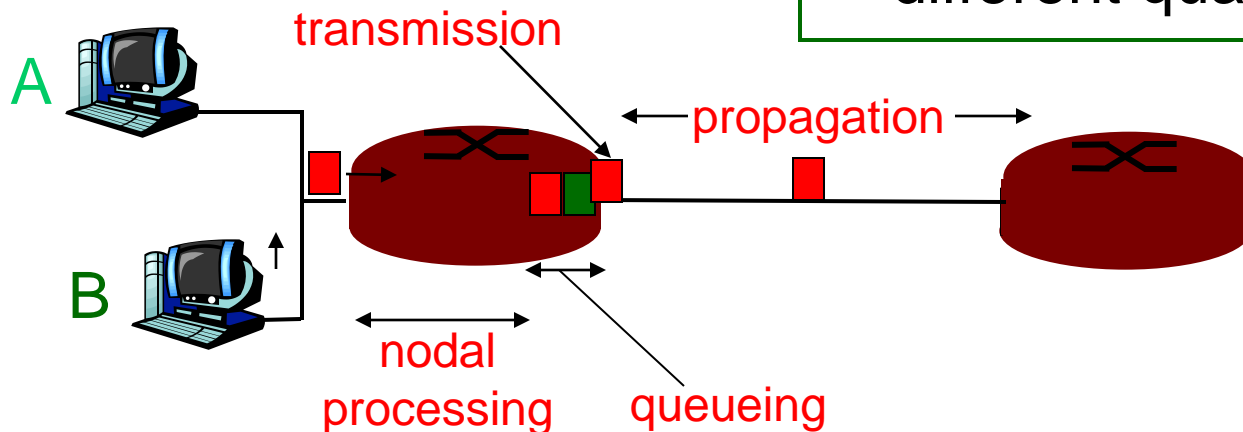


# Packet loss

- queue (aka buffer) preceding link in buffer has finite capacity
- packet arriving to full queue dropped (aka lost)
- lost packet may be retransmitted by previous node, by source end system, or not at all

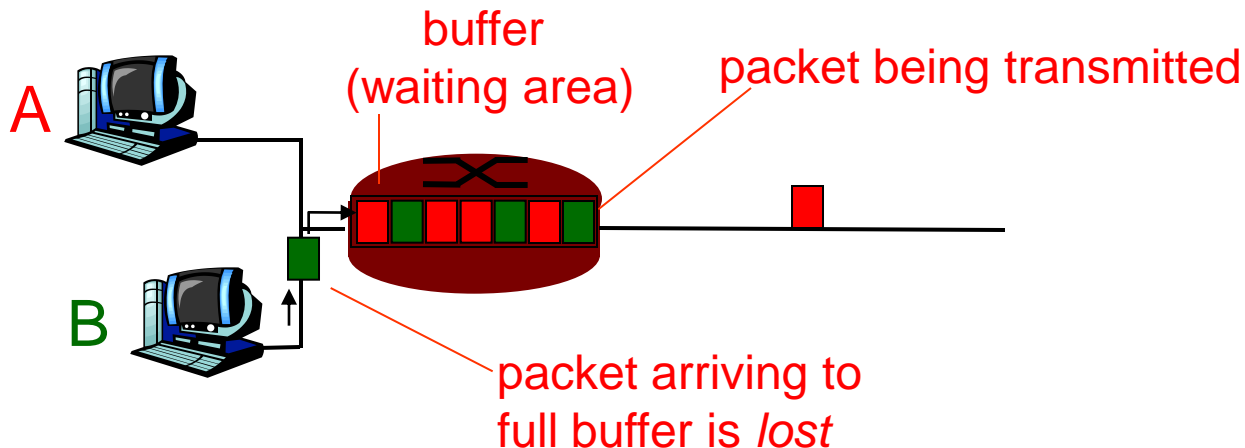


# Throughput

- *throughput*: rate (bits/time unit) at which bits transferred between sender/receiver
  - *instantaneous*: rate at given point in time
  - *average*: rate over longer period of time

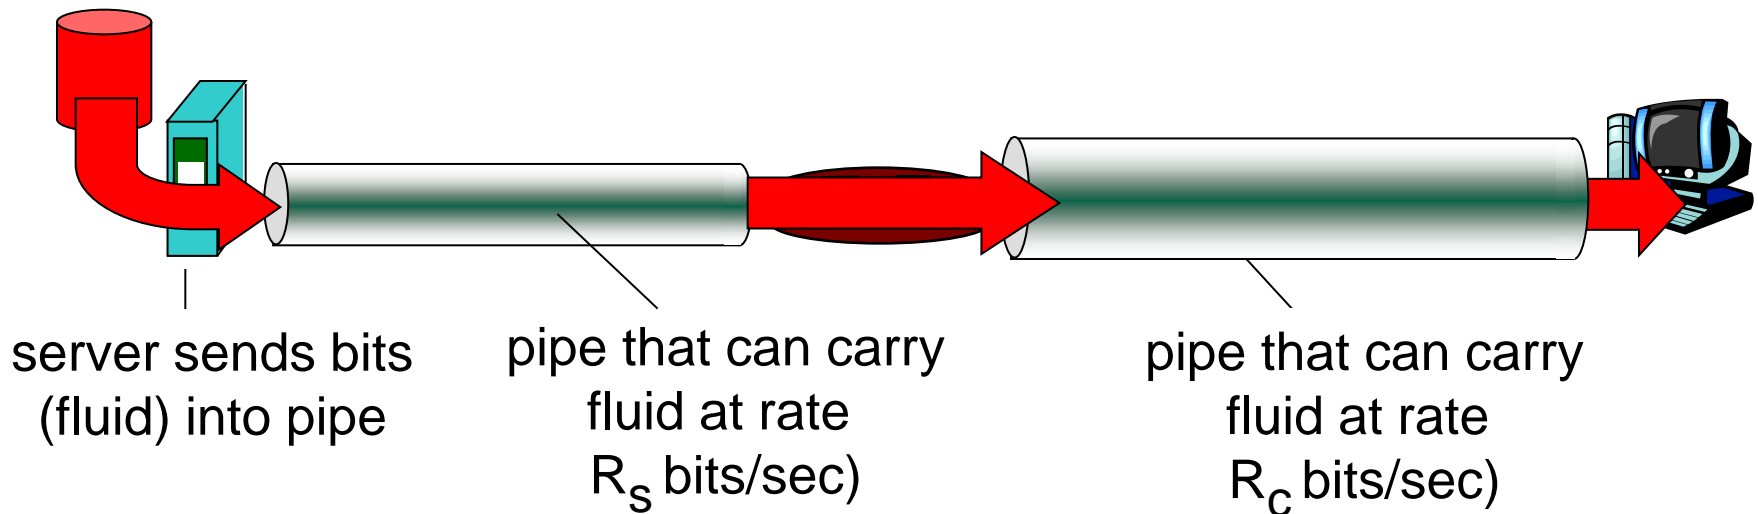


# Throughput (more)

- $R_s < R_c$  What is average end-end throughput?

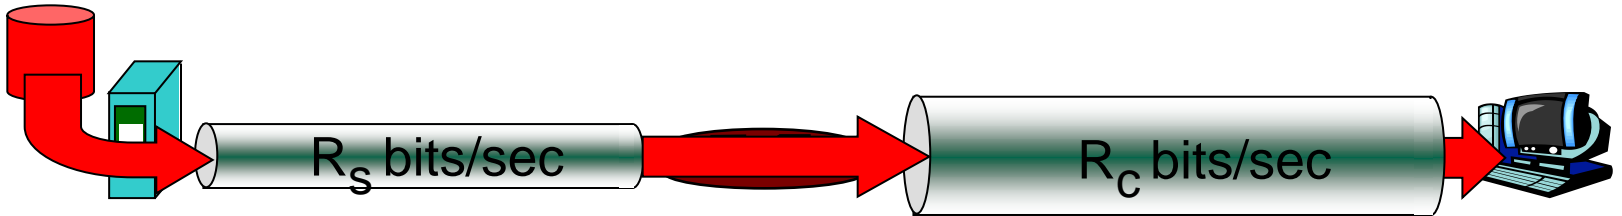

- $R_s > R_c$  What is average end-end throughput?

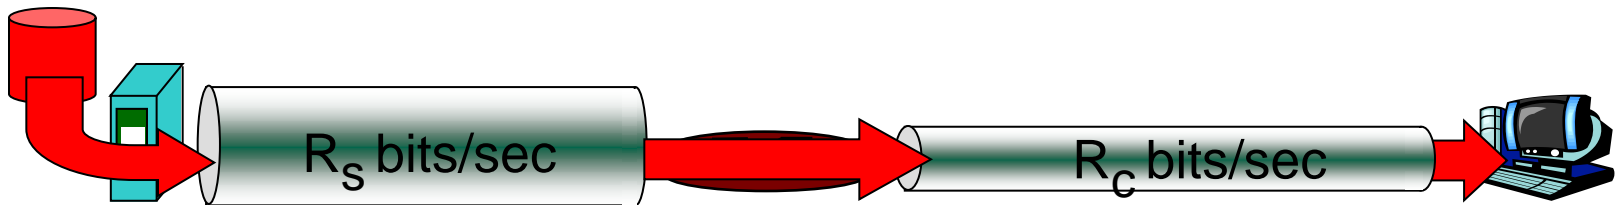


*bottleneck link*

link on end-end path that constrains end-end throughput

# Throughput: Internet scenario

- per-connection end-end throughput:  
 $\min(R_c, R_s, R/10)$
- in practice:  $R_c$  or  $R_s$  is often bottleneck

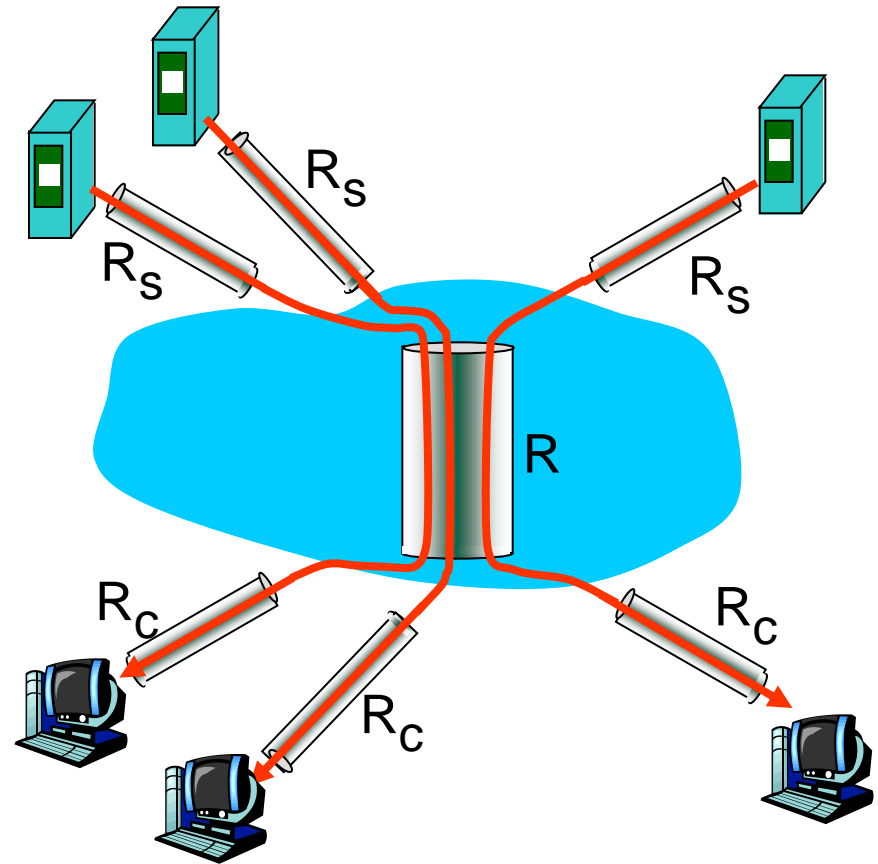

10 connections (fairly) share  
backbone bottleneck link  $R$  bits/sec



# Chapter 1: roadmap

1.1 What *is* the Internet?

1.2 Network edge

- end systems, access networks, links

1.3 Network core

- circuit switching, packet switching, network structure

1.4 Delay, loss and throughput in packet-switched networks

1.5 Protocol layers, service models

1.6 History

# Protocol “Layers”

Networks are complex!


- many “pieces”:
  - hosts
  - routers
  - links of various media
  - applications
  - protocols
  - hardware, software

Question:

Is there any hope of  
*organizing* structure of  
network?


Or at least our discussion  
of networks?

# Organization of air travel

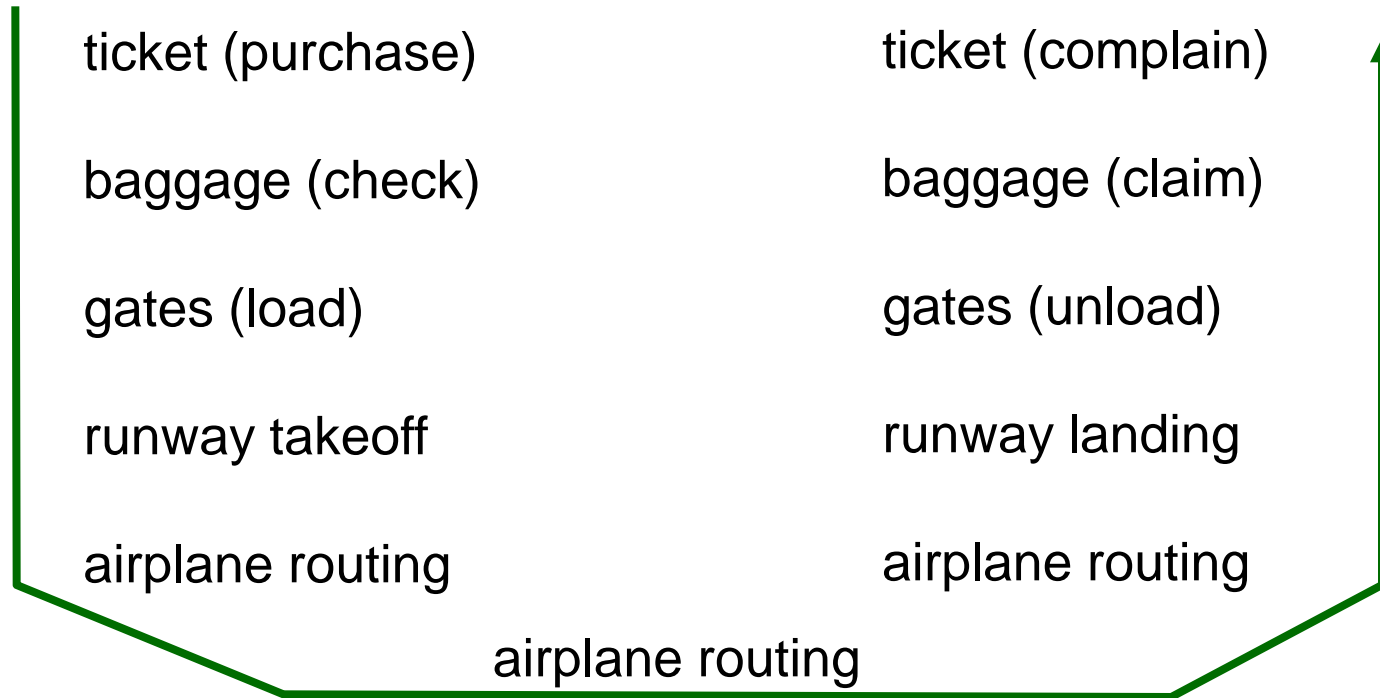

- a series of steps

# Layering of airline functionality

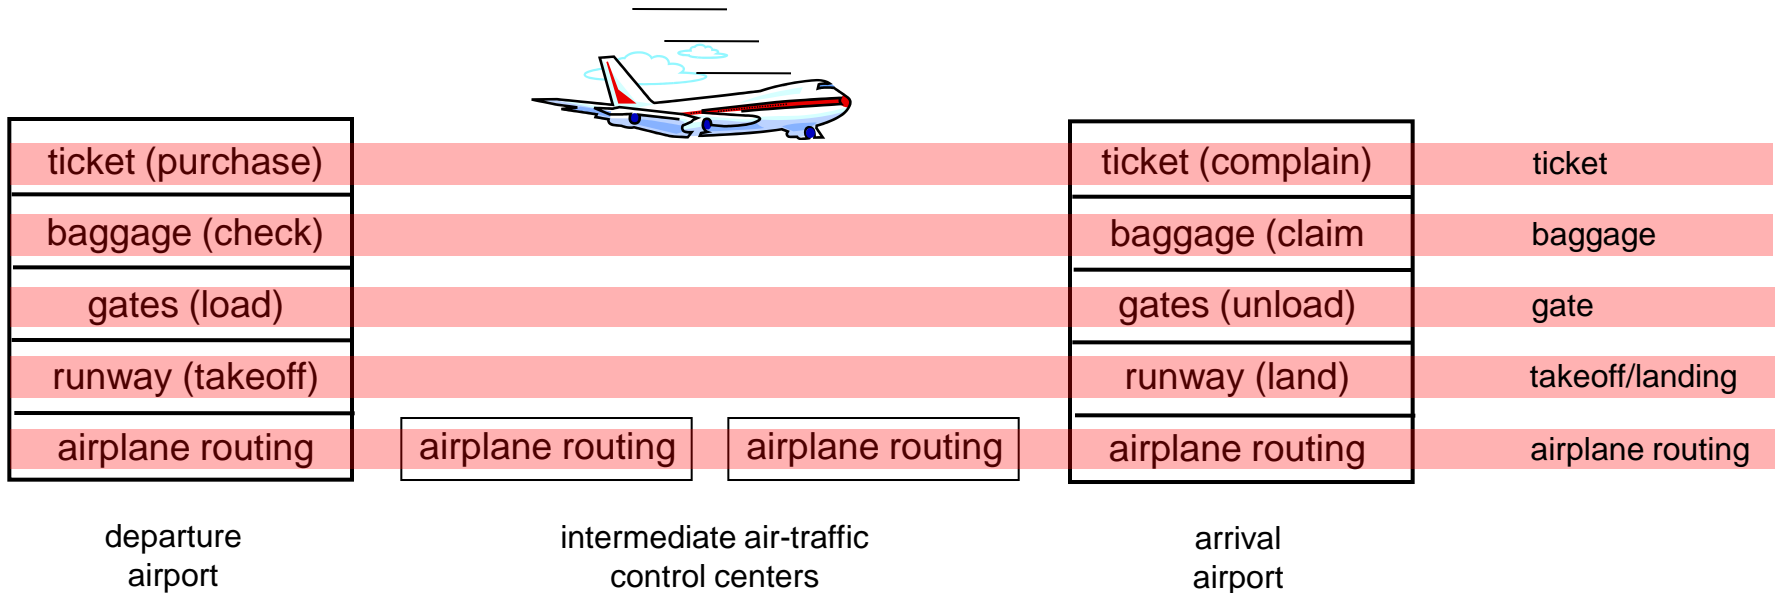

**Layers:** each layer implements a service

- via its own internal-layer actions
- relying on services provided by layer below


# Why layering?

## Dealing with complex systems:

- explicit structure allows identification, relationship of complex system's pieces
  - layered **reference model** for discussion
- modularization eases maintenance, updating of system
  - change of implementation of layer's service transparent to rest of system
  - e.g., change in gate procedure doesn't affect rest of system
- layering considered harmful?


# Internet protocol stack

- **application:** supporting network applications
  - FTP, SMTP, HTTP
- **transport:** process-process data transfer
  - TCP, UDP
- **network:** routing of datagrams from source to destination
  - IP, routing protocols
- **link:** data transfer between neighboring network elements
  - PPP, Ethernet
- **physical:** bits “on the wire”

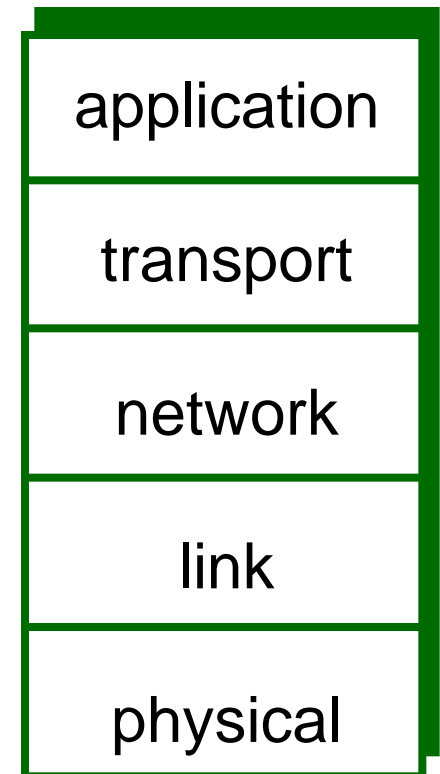


# ISO/OSI reference model




- **presentation**: allow applications to interpret meaning of data, e.g., encryption, compression, machine-specific conventions
- **session**: synchronization, checkpointing, recovery of data exchange
- Internet stack “missing” these layers!
  - these services, *if needed*, must be implemented in application
  - needed?

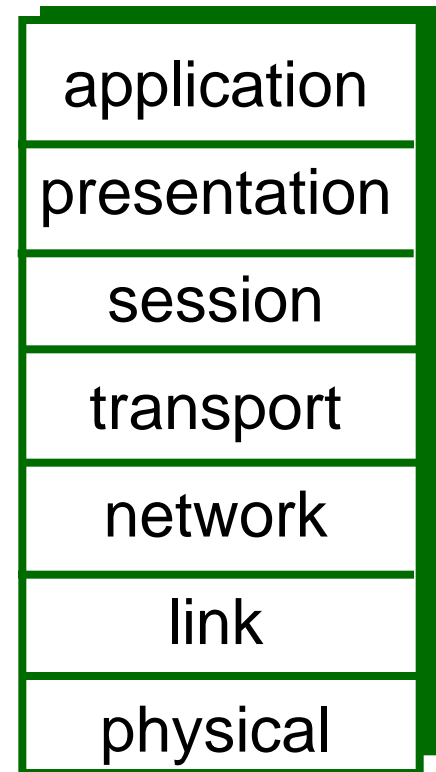







# Encapsulation

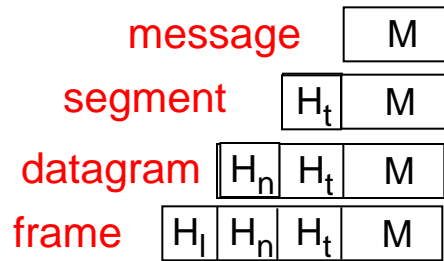

source



destination





# Chapter 1: roadmap

1.1 What *is* the Internet?

1.2 Network edge

- end systems, access networks, links

1.3 Network core

- circuit switching, packet switching, network structure

1.4 Delay, loss and throughput in packet-switched networks


1.5 Protocol layers, service models

1.6 History

# Internet History

## 1961-1972: Early packet-switching principles

- 1961: Kleinrock - queueing theory shows effectiveness of packet-switching
- 1964: Baran - packet-switching in military nets
- 1967: ARPAnet conceived by Advanced Research Projects Agency
- 1969: first ARPAnet node operational
- 1972:
  - ARPAnet public demonstration
  - NCP (Network Control Protocol) first host-host protocol
  - first e-mail program
  - ARPAnet has 15 nodes

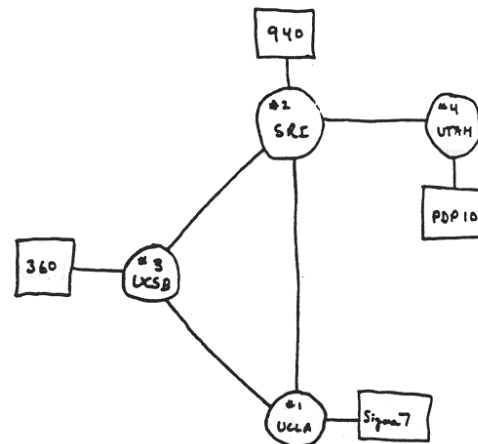

THE ARPA NETWORK

# Internet History

## *1972-1980: Internetworking, new and proprietary nets*

- **1970:** ALOHAnet satellite network in Hawaii
- **1974:** Cerf and Kahn - architecture for interconnecting networks
- **1976:** Ethernet at Xerox PARC
- **late 70's:** proprietary architectures: DECnet, SNA, XNA
- **late 70's:** switching fixed length packets (ATM precursor)
- **1979:** ARPAnet has 200 nodes

### Cerf and Kahn's internetworking principles:

- minimalism, autonomy - no internal changes required to interconnect networks
- best effort service model
- stateless routers
- decentralized control

define today's Internet architecture

# Internet History

*1980-1990: new protocols, a proliferation of networks*

- **1983**: deployment of TCP/IP
- **1982**: smtp e-mail protocol defined
- **1983**: DNS defined for name-to-IP-address translation
- **1985**: ftp protocol defined
- **1988**: TCP congestion control
- new national networks: Csnet, BITnet, NSFnet, Minitel
- 100,000 hosts connected to confederation of networks

# Internet History

## *1990, 2000's: commercialization, the Web, new apps*

- Early 1990's: ARPAnet decommissioned
- 1991: NSF lifts restrictions on commercial use of NSFnet (decommissioned, 1995)
- early 1990s: Web
  - hypertext [Bush 1945, Nelson 1960's]
  - HTML, HTTP: Berners-Lee
  - 1994: Mosaic, later Netscape
  - late 1990's: commercialization of the Web

## Late 1990's – 2000's:

- more killer apps: instant messaging, P2P file sharing
- network security to forefront
- est. 50 million host, 100 million+ users
- backbone links running at Gbps

# Introduction: Summary

## Covered a “ton” of material!

- Internet overview
  - Incl. Internet / ISP structure
- what’s a protocol?
- network edge, core, access network
  - packet-switching versus circuit-switching
  - Internet structure
- performance: loss, delay, throughput
- layering, service models
- history

## You (should ;) now have:

- context, overview, “feel” of networking
- more depth, detail *to follow!*